

# Highlights

valid until  
June 2025

## Compressors

**MEISTER 620/10/90 D** | [elmag.eu/10232](http://elmag.eu/10232)

**MEISTER-Z 620/10/90 D** | [elmag.eu/10262](http://elmag.eu/10262)

- > All-round compressor for versatile professional use, 2-cylinder unit, 2-stage compression
- > Low-speed motor, 1,480 rpm
- > Boiler capacity 90 litres, 10 bar, 400 volt engine, 4 HP
- > Suction capacity 549 l/min, delivery capacity 389 l/min (at 8 bar)
- > Complete with filter pressure reducer, Condor pressure switch, 2 Euro quick-connect couplings as well as PVC/solid rubber wheels and swivel castors with brakes!
- > **Possible variant MEISTER-Z: With DL container hot-dip galvanized inside and outside - 15-year rust-through guarantee**



INSTEAD OF PRICE EXCL. VAT  
~~1,220.-~~

DISCOUNT  
**-13%**

**1,065.-**

**MEISTER  
620/10/90 D**

**NEW!**

INSTEAD OF PRICE EXCL. VAT  
~~1,335.-~~

**1,225.-**

**MEISTER-Z  
620/10/90 D**

## Radial column drills

**RSBM Touch Vario series**

DISCOUNT UP TO  
**-11%**


- > Ideal design for large-scale heavy-duty drilling
- > Torsion-resistant, heavy-duty cantilever design with solid, polished steel column, very large spindle throat depth, up to 1,600 mm
- > Extremely low vibration and smooth running, extra-large cubature, right and left rotation
- > Electronically controlled automatic tapping unit with depth adjustment for blind holes
- > Hydraulically operated spindle and feed gearbox running in oil bath
- > **Intuitive touch-screen guides you step by step through the settings - so only minimal basic knowledge is required**

Models		4/50 Touch Vario	5/60 Touch Vario
Drilling capacity in steel	mm	50	60
Thread-cutting performance	M	M40	M45
Spindle holder	MK	MK 4	MK 5
Speed levels / range	rpm	2 / 74-2,200	- / 38-2,000
Quill stroke	mm	250	315
Rotatable drilling head	°	± 180°	± 180°
Drilling table surface	mm	630 × 500	630 × 500
Quill stroke	mm/min	variable / 0-300	variable / 0-300
Weight	kg	2,500	3,800
Order number		<b>82028</b>	<b>82029</b>
Instead of RRP excl. VAT		29,256.00	36,576.00
RRP excl. VAT		<b>21,890.00</b>	<b>27,100.00</b>



**RSBM 4/50  
Touch Vario**

**3** ELMAG®  
**GARANTIE**  
BEI ONLINE-  
REGISTRIERUNG  
[www.elmag.at/3jahre](http://www.elmag.at/3jahre)

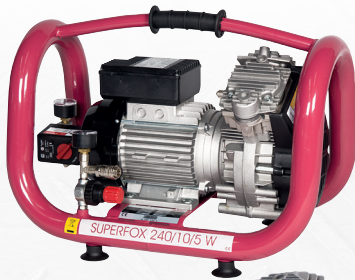

## Compressors SUPERFOX series

DISCOUNT  
**-14%**

- > Oil-free, compact direct drive
- > SUPERFOX 240/10/5 W: Portable compact unit with a robust protective frame, as pressure compensation container with a volume of 5 litres
- > SUPERFOX 240/10/30 W: 30 litre container volume - easy transport! Flexible compressed air source for production processes that require clean, oil-free compressed air.
- > With a delivery quantity of 120 litres per minute, it is a practical compressor for light compressed air work, ideal for hobbies, trade and construction sites.
- > Slow running: 2-cylinder unit at only 1,400 rpm
- > Incl. CONDOR pressure switch, pressure reducer with "plug and play" quick coupling as standard

Models SUPERFOX	Effective delivery rate	Suction capacity	Max. operating pressure	Oil-free	Container volume	Electric motor			Sound pressure level (4 m)	Speed of compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power	Voltage/frequency	PS						
	l/min	l/min	bar		l	kW	PS	V/Hz	dB(A)	rpm	kg			
240/10/5 W	120	240	10	●	5	1.1	1.5	230/50	72	1,400	23	21202	676.00	579.00
240/10/30 W	120	240	10	●	30	1.1	1.5	230/50	72	1,400	31	21200	745.00	639.00



TIGER 600/10/22 D

## Compressors TIGER series

- > Robust technology for demanding, professional construction site use
- > Solid rubber wheels Ø 260 mm for flexible, safe use
- > High efficiency and operational reliability thanks to V-belt drive
- > Two-cylinder units with high-performance pistons Mod. 600 & 700 2-stage compacting
- > Large-area aftercooler made of die-cast aluminium
- > Sturdy tube frame with extendable handlebar
- > Incl. CONDOR pressure switch, ELMAG filter pressure reducer, hour meter, motor protection switch, 2 air outlets with safety venting couplings as standard!

**FREE NOW!**

"High-flex" compressed air hose SET 10 m, 8 × 13 mm



Models TIGER	Effective delivery rate	Suction capacity	Max. operating pressure	Oil-lubricated	Container volume	Electric motor			Sound pressure level (4 m)	Speed of compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power	Voltage/frequency	PS						
	l/min	l/min	bar		l	kW	PS	V/Hz	dB(A)	rpm	kg			
400/10/22 W	260	380	10	●	2 × 11	2.2	3	230/50	74	1,300	59	10071	1,281.00	1,249.00
400/10/22 D	260	380	10	●	2 × 11	2.2	3	400/50	74	1,300	59	10070	1,281.00	1,249.00
600/10/22 D	378	539	10	●	2 × 11	3.0	4	400/50	78	1,400	67	10075	1,597.00	1,499.00
700/10/22 D	439	578	10	●	2 × 11	4.0	5.5	400/50	78	1,400	72	10077	1,807.00	1,739.00

## Compressors EUROAIR series

- > Basic professional class model
- > Boiler capacity 50 litres, 10 bar
- > 230/400 volt engine, 3 HP power
- > Lubricated 2-cylinder units
- > The low speeds of ONLY 930 to max. 1,450 RPM ensure high duty cycle, long service life and smooth running.
- > **Boiler coated on the inside (improved corrosion protection)**
- > **Complete with filter pressure reducer and CONDOR pressure switch**

**SALE**  
**(VALID WHILE STOCKS LAST)**



DISCOUNT UP TO  
**-21%**

COMPRESSED AIR

EUROAIR 311/10/50 W

EUROAIR models	Effective delivery rate l/min	Suction capacity l/min	Max. operating pressure bar	Oil-lubricated	Container volume l	Electric motor			Sound pressure level (4 m) dB(A)	Speed of compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	PS	Voltage/frequency V/Hz						
311/10/50 W	175	300	10	●	50	2.2	3	230/50	73	1,050	48	10220	855.00	679.00
331/10/50 D	195	330	10	●	50	2.2	3	400/50	74	1,450	48	10221	925.00	749.00
401/10/50 W	220	380	10	●	50	2.2	3	230/50	73	930	58	10222	925.00	749.00
411/10/50 D	240	400	10	●	50	2.2	3	400/50	75	1,010	58	10223	999.00	819.00

## Compressor PROFI-LINE 840/10/200 D | [elmag.eu/11022](http://elmag.eu/11022)

- > High-performance piston compressor for professional use, 2-cylinder unit, 2-stage compression
- > Boiler capacity 200 litres, 10 bar, 400 volt engine, 7.5 HP output
- > Suction capacity 850 l/min, delivery capacity 595 l/min (at 8 bar)
- > Unit speed ONLY 1,150 rpm: Long service life, low noise
- > Complete with filter pressure regulator 1/2", CONDOR pressure switch with operating hours counter, GI wheels, swivel castors with brakes & 2 safety bleed couplings

**FREE NOW!**

Automatic condensate drain  
AKA 1/2", 230 volt



Functionality:



INSTEAD OF PRICE EXCL. VAT  
2,753.50  
**DISCOUNT -23%**  
**2,119.-**



INSTEAD OF PRICE EXCL. VAT  
~~212.-~~

DISCOUNT  
**-16%**

**179.-**

## Compressor

**EUROAIR 220/8/24 W** | [elmag.eu/10006](http://elmag.eu/10006)

- > High-quality DIY compressor
- > 1-cylinder unit, lubricated, 2,850 rpm
- > Boiler capacity 24 litres, 8 bar
- > Suction capacity 222 l/min, delivery capacity 122 l/min (at 6 bar)
- > 230 volt engine, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling



INSTEAD OF PRICE EXCL. VAT  
~~279.-~~

DISCOUNT  
**-18%**

**229.-**

## Compressor

**WERKER 275/10/50 W** | [elmag.eu/10014](http://elmag.eu/10014)

- > 1-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 275 l/min, delivery capacity 115 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230 volt engine, 2.5 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



INSTEAD OF PRICE EXCL. VAT  
~~225.-~~

DISCOUNT  
**-20%**

**179.-**

## Whisper compressor

**WHISPER 110/8/8 W** | [elmag.eu/21217](http://elmag.eu/21217)

- > Very quiet – 56 dB(A)
- > High-quality DIY compressor
- > Oil-free 2-cylinder unit with low speed of 1,400 rpm
- > Portable, light and easy to handle (17 kg)
- > Container volume 8 litres, 8 bar
- > Suction capacity 110 l/min, delivery capacity 55 l/min
- > 230 volt engine, 0.75 HP output
- > Incl. pressure switch, pressure regulator as standard, with pressure gauge and 2 quick-release couplings



INSTEAD OF PRICE EXCL. VAT  
~~359.-~~

DISCOUNT  
**-17%**

**299.-**

## Compressor

**WERKER 365/10/50 W** | [elmag.eu/10099](http://elmag.eu/10099)

- > 2-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 365 l/min, delivery capacity 155 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230 volt engine, 3 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



## Compressors MEISTER series

- > High-quality compressors MADE IN ITALY
- > Low speeds of 1,100 rpm ensure high duty cycle, long service life and smooth running
- > Indirect drive via V-belt
- > Universal use (for compressed air tools, painting work, hand sandblasting guns, etc.)
- > Ideal for semi-professional use and agriculture
- > 2-cylinder block units with large fan wheel
- > For applications with a high compressed air demand (painting, sanding, etc.), a minimum container volume of 90 litres is recommended.
- > Complete with filter pressure regulator, Condor pressure switch, 2 Euro quick couplings, PVC/solid rubber wheels and swivel castors with brakes!



MEISTER 520/10/50 D

MEISTER models	Effective delivery rate l/min	Suction capacity l/min	Max. operating pressure bar	Container volume l	Oil-lubricated	Electric motor			Sound pressure level (4 m) dB(A)	Speed of compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	PS	Voltage/frequency V/Hz						
520/10/50 D	315	480	10	50	●	2.2	3	400/50	77	1,100	57	10230	895.00	825.00
520/10/90 D	315	480	10	90	●	2.2	3	400/50	77	1,100	71	10231	955.00	899.00

## Compressors MEISTER series



- > High-quality compressors MADE IN ITALY
- > Low speeds of 1,100 rpm ensure high duty cycle, long service life and smooth running
- > Indirect drive via V-belt
- > Universal use (for compressed air tools, painting work, hand sandblasting guns, etc.)
- > Ideal for semi-professional use and agriculture
- > 2-cylinder block units with large fan wheel
- > Models with internally and externally hot-dip galvanized boiler
- > This increases protection against corrosion
- > 15-year WARRANTY against perforation corrosion (subject to observance of the normal maintenance instructions)
- > Complete with filter pressure regulator, Condor pressure switch, 2 Euro quick couplings, PVC/solid rubber wheels and swivel castors with brakes!



Photo of symbol

MEISTER-Z models	Effective delivery rate l/min	Suction capacity l/min	Max. operating pressure bar	Container volume l	Oil-lubricated	Electric motor			Sound pressure level (4 m) dB(A)	Speed of compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	PS	Voltage/frequency V/Hz						
480/10/50 W	315	480	10	50	●	2.2	3	230/50	77	1,100	55	10260	935.00	879.00
520/10/50 D	315	480	10	50	●	2.2	3	400/50	77	1,100	57	10261	999.00	945.00



## PROFI-LINE SILENT high-performance compressor PLS 500/10/24+100 D | [elmag.eu/10130](http://elmag.eu/10130)

- > Highly effective sound insulation – noise level ONLY 67 dB(A)!!!
- > 2-cylinder unit, 2-stage compression
- > Cooling fan for forced cooling
- > Two CA containers 100+24 litres, max. 10 bar
- > Centralised condensate drainage from both CA containers
- > Suction capacity 520 l/min, delivery capacity 370 l/min (at 8 bar)
- > 400 volt engine 3 kW, 4 HP
- > Low unit speed of ONLY 1,450 rpm
- > Vibration-free due to vibration buffer
- > **Included as standard: Operating hours counter & ball valve for compressed air outlet 1/2"**

**FREE NOW!**

Automatic condensate drain AKA 1/2", 230 volt



INSTEAD OF PRICE EXCL. VAT  
~~2,569.50~~

DISCOUNT  
**-16%**

**2,170.-**



## MARK screw compressor

MSM 5.5 D-270 | [elmag.eu/11603](http://elmag.eu/11603)

- > Fully automatic screw compressor for continuous operation over several hours
- > Effective delivery rate 780 l/min at 10 bar
- > Container volume 270 litres, AD2000 tested (no TÜV approval required in AT)
- > Rated power 5.5 kW, 400 volt
- > Energy-saving star-delta starting circuit
- > Intelligent digital control unit ES4000 Connect with load-idle control
- > Soundproofed "very quiet" 66 dB(A)
- > Incl. MDX refrigeration dryer for condensate-free compressed air

**FREE NOW!**

Functionality:



Automatic condensate drain  
AKA 1/2", 230 volt and  
matching rubber buffer

INSTEAD OF PRICE EXCL. VAT  
~~5,873.50~~

DISCOUNT  
**-12%**

**5,149.-**



## Automatic hose reel

**EUROREEL AIR 8/10** | [elmag.eu/42292](http://elmag.eu/42292)

- > Robust, impact-resistant design
- > 10 m 8 × 12 mm hybrid polymer hose, max. 15 bar
- > 1.5 m long connection cable
- > Incl. sturdy steel wall bracket
- > **Quality connection coupling and plug nipple are fitted as standard**

INSTEAD OF PRICE EXCL. VAT ~~113.-~~  
**DISCOUNT -17%**  
**94.-**



## Automatic cable reel

**EUROREEL ELECTRIC 10/230** | [elmag.eu/42298](http://elmag.eu/42298)

**EUROREEL ELECTRIC 20/230** | [elmag.eu/42299](http://elmag.eu/42299)

- > Load capacity unrolled: max. 2,000 W
- > 10 m or 20 m cable length, 230 volt, 3 × 1.5 mm<sup>2</sup>
- > Incl. 1.5 m supply cable
- > Incl. stable wall mounting
- > **With Schuko plug and socket outlet as standard**

INSTEAD OF PRICE ~~97.-~~ **-19%** **79.-**

INSTEAD OF PRICE ~~147.-~~ **-19%** **119.-**



**EUROREEL ELECTRIC 20/230**

## Automatic hose reel

**ROLL AIR MEGA 20** | [elmag.eu/42193](http://elmag.eu/42193)

- > Robust, impact-resistant design
- > 20 m PU hose 10 × 15 mm, max. 15 bar
- > 2 m long connection cable
- > Swivel joint with anti-kink spring
- > Swivelling steel wall bracket
- > **Incl. steel coupling & steel nipple JWL, NW 7.8**

 **Made in Italy**

INSTEAD OF PRICE EXCL. VAT ~~366.-~~  
**DISCOUNT -18%**  
**299.-**



## Automatic hose reel

**EUROREEL AIR OPEN 15 S** | [elmag.eu/42297](http://elmag.eu/42297)

- > 15 m PU ether hose 10 × 15 mm, 20 bar
  - Highly flexible (even in cold conditions)
  - 3 times longer service life
  - Increased resistance to moisture and chemicals
- > Robust metal housing incl. swivelling wall or ceiling suspension
- > Incl. 3 m hose supply cable
- > **High-quality connection coupling and plug nipple are fitted as standard**

INSTEAD OF PRICE EXCL. VAT ~~249.-~~  
**DISCOUNT -16%**  
**209.-**





**ROLL WATER EVO 20/13**




**ROLL WATER MEGA 20/16**

## Automatic water hose reel Series ROLL WATER

DISCOUNT UP TO  
**-17%**

- > The **ORIGINAL** from Italy!
- > Incl. original GARDENA starter set
- > Impact and UV-resistant plastic housing incl. sturdy wall bracket, 1 m connection cable
- > Blocking device can be switched off
- > Ordered return due to layer winding mechanism
- > Strong return springs made of spring steel "Made in Germany"

Made  
in  
Italy

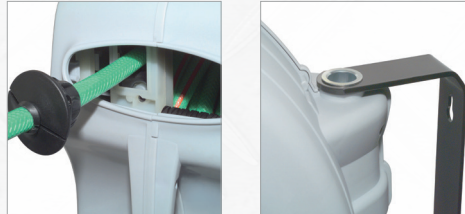

Models	EVO 20/13	MEGA 30/13	MEGA 20/16
Technical data			
Hose quality	PVC	PVC	PVC
Hose diameter	Inch 1/2 (11 mm)	1/2 (11 mm)	5/8 (15 mm)
Hose length	m 20	30	20
Length of supply cable approx.	m 1	1	1
Temperature max.	°C 40	40	40
Operating pressure max.	bar 6	6	6
Weight	kg 9.8	12.7	12
Order data			
Order number	<b>42265</b>	<b>42266</b>	<b>42267</b>
Instead of RRP excl. VAT	225.00	312.00	312.00
RRP excl. VAT	<b>189.00</b>	<b>259.00</b>	<b>259.00</b>



Made  
in  
Italy



## INDUSTRIAL hose reel

**4432/32 - SET** | [elmag.eu/43023](http://elmag.eu/43023)

- > For water (max. 130°C), 200 bar
- > Drum/holder: ABS plastic/stainless steel AISI 304
- > Swivel joint: Stainless steel AISI 304
- > 18 m HP hose: 3/8" (9.5 x 17 mm)
- > With swivelling bracket 40° left/right and 60 cm hose supply cable + 3 m HP connection hose & intermediate adapter to lance as standard for Kärcher/Kränzle
- > Field of application: Workshops, agriculture
- > **5-year WARRANTY**

INSTEAD OF PRICE EXCL. VAT  
~~797.50~~

DISCOUNT  
**-16%**

**669.-**

**FOR HIGH-PRESSURE CLEANERS**

## Tyre inflator "calibrated"

**60 DTE** | [elmag.eu/42057](http://elmag.eu/42057)

Made  
in  
Italy

- > Good-value tyre inflator with "calibrated" WIKA pressure gauge (EN 12645:2014)
- > Rotatable pressure gauge Ø 63 mm, for a good view in every position!
- > Pressure range 0-10 bar
- > Flex. hose, 40 cm, with quick-connecting nipple
- > Rubber protective cap

INSTEAD OF PRICE EXCL. VAT  
~~41.50~~

DISCOUNT  
**-16%**

**35.-**







## Digital hand tyre inflators

Model JWL incl. QT quick connector | [elmag.eu/41500](http://elmag.eu/41500)

Model JWL incl. twin connector | [elmag.eu/41501](http://elmag.eu/41501)

- > Pressure deviation max. 0.01 to 0.04 bar
- > Pressure range: 0.2-10 bar
- > Incl. 1 m hose, with patented QT quick or twin connector
- > QT quick connector: 100% tightness to the valve (Schrader valve)
- > Display accuracy according to DS/EN 12645:2014
- > Each device with a serial number and its own calibration certificate
- > Shock-resistant due to rubber coating
- > Dust and water protection – IP 65
- > Working temperature: -10 to +40 °C
- > Large display with backlight
- > Display options: bar / psi / kPa / kg/cm<sup>2</sup>

INSTEAD OF PRICE ~~146.-~~ **-12%** **129.-**

INSTEAD OF PRICE ~~170.-~~ **-12%** **149.-**

**CALIBRATED!**



Incl. twin connector

Incl. QT quick connector



## JWL compressed air guns

JWL products are developed, produced and tested in the company's own factory in Denmark. JWL blow guns have become a classic – the combination of classic design and maximum functionality makes working easier and more efficient.

### Blow guns

The durability of our blow guns is outstanding – even after 28 million activations. We are therefore proud to be able to offer a 25-year warranty on the valve system of our JWL blow gun.

- > Medium: Filtered compressed air
- > Max. operating pressure: 16 bar
- > Recommended working pressure: 2-8 bar
- > Air consumption at 6/8 bar: 290/380 l/min
- > Large selection of models (pipe lengths up to 2 m possible)

**25**  
YEARS  
WARRANTY

DISCOUNT UP TO  
**-16%**



Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
Classic, pipe Ø 8 × 100 mm, bent, incl. plug-in nipple	41302	15.90	14.00
Classic, pipe Ø 8 × 100 mm, curved, with rubber nozzle, incl. plug-in nipple, protects against scratches and scrapes	41305	21.30	18.00
Classic, pipe Ø 8 × 300 mm, straight, incl. plug-in nipple	41310	23.40	20.00
Classic, pipe Ø 8 × 500 mm, straight, incl. plug-in nipple	41312	26.30	22.00



TRUE  
COLOR

## Automatic welding screen

**MultiSafeVario® L-TC** | [elmag.eu/56381](http://elmag.eu/56381)

- > For all common welding processes, also for TIG > 5 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 520 g
- > Top marks for classification: 1/1/1/1, shutter speed: 0.05 ms
- > Viewing window: 98 × 43 mm
- > Sanding mode, replaceable backup battery
- > **Improved headband, ergonomic helmet shell**
- Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT  
~~66.50~~

DISCOUNT  
**-38%**

**41.50**



GREEN  
COLOR

## Automatic welding screens

**MultiSafeVario® 2XL**

- > For all common welding processes, also for TIG > 5 A
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 1/1/1/2, shutter speed: 0.05 ms
- > Large viewing windows: 98 × 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT  
~~109.-~~

DISCOUNT  
**-45%**

**59.90**

2XL art | [elmag.eu/56382](http://elmag.eu/56382)

2XL eagle | [elmag.eu/56383](http://elmag.eu/56383)



GREEN  
COLOR

## Automatic welding screens

**MultiSafeVario® 2XL flame** | [elmag.eu/56384](http://elmag.eu/56384)

- > For all common welding processes, also for TIG > 5 A
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 1/1/1/2, shutter speed: 0.05 ms
- > Large viewing windows: 98 × 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT  
~~109.-~~

DISCOUNT  
**-33%**

**72.90**



TRUE  
COLOR

## Automatic welding screen

**MultiSafeVario® PREMIUM-TC** | [elmag.eu/58380](http://elmag.eu/58380)

- > For all common welding processes, also for TIG > 3 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 4-9 & 8-13, internal controls**
- > Adjustable brightening delay 0.3 ~ 0.9 s
- > 4 light sensors, weight: 460 g
- > Top marks for classification 1/1/1/1, shutter speed: 0.033 ms
- > Extra-large viewing window: 100 × 65 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**


INSTEAD OF PRICE EXCL. VAT  
~~129.-~~

DISCOUNT  
**-23%**

**99.90**

## Exhaust air sets

- > Fast working possible due to particularly flexible adjustment with just one hand
- > 40% less adjustment of the extraction arm needed thanks to the flow-optimised design of the hood.
- > Holds the set position self-supporting through internal support linkage with spring assistance
- > Compact solution for welding stations with direct outdoor discharge
- > Scope of application: Large amounts of smoke/dust, continuous use, welding fumes, gases, vapours, light dusts
- > For wall mounting or on columns

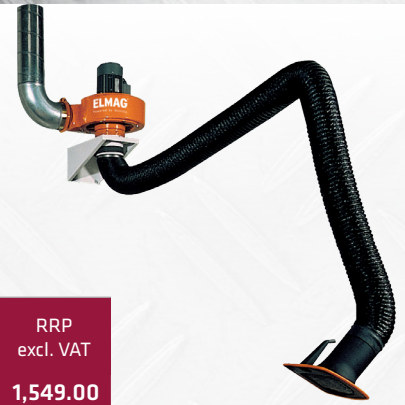

Models	Connection	Suction power with arm	Motor power	Noise level	Pipe Ø	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	Volt	m <sup>3</sup> /h	watt	dB(A)	mm	kg			
Exhaust air set 2m	400	1,000	750	73	150	40	57526	<del>1,630.00</del>	<b>1,549.00</b>
Exhaust air set 3m	400	1,000	750	73	150	44	57527	<del>1,720.00</del>	<b>1,639.00</b>
Exhaust air set 4m	400	1,000	750	73	150	48	57528	<del>1,805.00</del>	<b>1,715.00</b>

## Extraction systems, mobile SMART MASTER series

- > Compact basic device for sporadic smoke extraction, 230 volt
- > Rotating & swivelling extraction hood 360°
- > Three-stage filter (filter area 13 m<sup>2</sup>)
- > Extraction capacity with arm 950 m<sup>3</sup>/h
- > Noise level: 72 db(A)

Arm length 2 m  
W3/IFA tested  
[elmag.eu/58600](http://elmag.eu/58600)

INSTEAD OF PRICE EXCL. VAT  
~~1,873.-~~

**1,699.-**

Arm length 2 m  
H13 AT Edition  
[elmag.eu/58650](http://elmag.eu/58650)

INSTEAD OF PRICE EXCL. VAT  
~~1,958.-~~

**1,779.-**

Product video:



**FREE NOW!**  
10 pre-filter mats



NOTE: ELMAG® offers the SMART-MASTER mobile suction units in two versions!

Selection criteria	Austria	Germany
Sufficient authorisation for standard welding fumes (without carcinogenic substances)	W3/IFA approval	W3/IFA approval
Required authorisation for carcinogenic substances (e.g. welding fumes for stainless steel or brass welding work)	H13 AT Edition (HEPA filter according to GKV 2011, Section 15)	W3/IFA approval

## Extraction systems, mobile PROFI MASTER series

- > Robust quality with powerful filters for regular use in the repair shop or maintenance area, 400 volt
- > Rotating & swivelling extraction hood 360°
- > Two-stage filter (filter area 17 m<sup>2</sup>)
- > Extraction capacity with arm 1,100 m<sup>3</sup>/h
- > Noise level: 70 db(A)
- > Optional on request automatic start-stop available

Arm length 3 m  
W3/IFA tested  
[elmag.eu/58603](http://elmag.eu/58603)

INSTEAD OF PRICE EXCL. VAT  
~~3,018.-~~

**2,869.-**

Arm length 3 m  
H13 AT edition  
[elmag.eu/58653](http://elmag.eu/58653)

INSTEAD OF PRICE EXCL. VAT  
~~2,933.-~~

**2,789.-**

Product video:



**FREE NOW!**  
10 pre-filter mats



DISCOUNT UP TO  
**-29%**

## MIG/MAG gas-shielded arc welding systems

### EUROMIG<sup>plus</sup>

- > Compact design with clear, ergonomically arranged control panel
- > Powerful feed units with 2 roller drive, with 3 m hose package length as standard
- > From model EM 204: Main transformers with copper winding, 2-cycle, 4-cycle, spot & interval welding function, EM 174 only 2-cycle & spot welding function

Models		EM 174	EM 204	EM 254
Material thickness	mm	0.5-6	0.5-8	0.5-10
Welding current setting range	A	35-120	90-165	15-200
Welding current switching stages	No.	6	10	10
Steel/stainless steel wire diameter	mm	0.6-0.8	0.6-1.0	0.6-1.2
Duty cycle at 40 °C	% / A	100/47	100/47	100/130
Duty cycle at max. welding current	% / A	10/120	10/165	20/200
Feed drive	Rollers	2	2	2
Original BINZEL hose package	MB	EVO 15/3m	EVO 15/3m	EVO 25/3m
Mains voltage / fuse protection	V / A	230/16	400/16	400/16
Order number		<b>54015</b>	<b>54016</b>	<b>54017</b>
Instead of RRP excl. VAT		1,209.60	1,694.60	2,063.60
RRP excl. VAT		<b>929.00</b>	<b>1,299.00</b>	<b>1,469.00</b>



EUROMIG<sup>plus</sup> 254

**+** FOR FREE! Wear parts set and a pair of welding gloves

## MIG/MAG, MMA multifunction welding inverter

### CPTX-I 400 2W | [elmag.eu/54080](http://elmag.eu/54080)

- > Infinitely variable MIG/MAG, MMA/E manual industrial welding unit with 100% duty cycle at 400 amps
- > SYNERGY function for automatic wire feed control when welding current is increased/decreased with different characteristic curves for STEEL & STAINLESS STEEL
- > With detachable feed unit & water-cooled hose package, as well as many features

Model		CPTX-I 400 2W
Material thickness	mm	1.0-30
Welding current setting range MIG/MAG	A	30-400
Welding voltage setting range	V	12-38
Steel/stainless steel wire diameter	mm	0.8-1.2
Aluminium wire diameter	mm	1.0-1.2
Duty cycle at max. welding current MIG/MAG	% / A	100/400
Welding current setting range MMA	A	30-300
Duty cycle at max. welding current MMA	% / A	60/300
Welding wire reel diameter	mm	200/300
Welding wire reel weight	kg	5/15
Feed drive	Rollers	4
Water-cooled	-	●
Mains voltage / fuse protection	V / A	400/32
Weight	kg	120



DISCOUNT  
**-16%**  
INSTEAD OF PRICE EXCL. VAT  
~~6,066.-~~  
**5,099.-**

**+** FOR FREE! Hose package MBC 501 W/4 m

STEEL SET mixed gas 20 litres SG2/G <sub>3</sub> Si 1-0.8 mm / 15 kg   <a href="http://elmag.eu/00285">elmag.eu/00285</a>	<b>359.-</b>
STEEL SET mixed gas 20 litres SG2/G <sub>3</sub> Si 1-1.0 mm / 15 kg   <a href="http://elmag.eu/00286">elmag.eu/00286</a>	<b>359.-</b>
STEEL SET mixed gas 20 litres SG2/G <sub>3</sub> Si 1-1.2 mm / 15 kg   <a href="http://elmag.eu/00287">elmag.eu/00287</a>	<b>359.-</b>

## Magnetic pole terminal/bracket

1. Retaining force 40 kg, up to 300 A welding current
2. Retaining force 89 kg, up to 600 A welding current
3. Retaining force 67 kg, up to 300 A welding current, 45/135°, 60/120°, 75/105°, 90°



Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 300 A, Ø 40 mm	55470	62.00	<b>56.00</b>
2 600 A, Ø 70 mm	55471	122.00	<b>109.00</b>
3 Mini Multi 300 A	55473	61.00	<b>55.00</b>

## Magnetic stop block

1. Retaining force 68 kg, l x w x h 48 x 31 x 65 mm
2. Retaining force 268 kg, l x w x h 76 x 52 x 110 mm



Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 MS 165	55476	57.50	<b>52.00</b>
2 MS 600	55477	200.00	<b>179.00</b>

## Hand-held lifting magnet

1. Shear/vertical tear-out force 20/89\* kg, incl. 2 LI-ION batteries



Model	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 HL 60-CE	55480	571.00	<b>515.00</b>

## MIG/MAG, MMA/E manual, TIG welding inverter M3S series

DISCOUNT UP TO  
**-19%**

- > Mobile multifunctional welding inverter
- > 3 welding processes in one device, MIG/MAG, MMA/E manual & LIFT-TIG (DC)
- > Synergic operation in MIG/MAG process for steel, stainless steel, aluminium and CuSi materials or manual operation
- > 200/250 or 300/350 amps max. welding current at 60 or 40% duty cycle
- > Three-phase 3~400 V, compliant with Ecodesign directive as energy efficiency > 80%
- > 4-roller drive incl. gear rim connection to pressure rollers made of die-cast aluminium
- > XL housing size for welding wire reels Ø & weight: max. Ø 300 mm / max. 15 kg
- > Incl. 2-cycle, 4-cycle, special 4-cycle & spot-welding function
- > In MIG/MAG mode: Inductance, under FN gas pre-flow time (PrG) & gas post-flow time (PoG), soft start (Sft), burn-back/wire burn-back (bub), up/down remote control (u-d), in special 4-step mode, starting current (SCP) and end crater current (ECP) can also be set
- > In MMA mode: Hot start (Hot) & arc force (Arcl) adjustable
- > JOB function: 10 welding programs can be stored
- > With optional accessories and polarity reversal, gas-shielded flood wire & LIFT-TIG (DC) welding also possible
- > Extensive standard equipment: Hose package MBC 24/4m / 36/4m or MBC 501W/4m, ground cable 3m, electrode holder cable 4m, gas hose 2.5m, pressure regulator with 2 pressure gauges incl. Quick Fit coupling, wire spool adapter for D300 & D200 spools, various feed rollers



Product video:



M3S 2060 T 4XL

Accessories	Order number	RRP excl. VAT
Mixed gas steel set 20 l, welding rod SG2 (G <sub>2</sub> Si 1) 0.8 mm / 15 kg	00285	359.00
Mixed gas steel set 20 l, welding rod SG2 (G <sub>2</sub> Si 1) 1.0 mm / 15 kg	00286	359.00
Mixed gas steel set 20 l, welding rod SG2 (G <sub>2</sub> Si 1) 1.2 mm / 15 kg	00287	359.00
TIG hose package SRC ONE 26/4m - Up/Down, incl. 19-piece initial equipment set	15850	215.00
SRC ONE TIG hose package 26/8m - Up/Down, incl. 19-piece initial equipment set	15851	279.00
Steel cylinder, argon 4.6, 20 litres	54242	425.00

**FOR FREE!** Set of wear parts & welding gloves worth up to €75.60!



Models		M3S 2060 T 4XL	M3S 2560 T 4XL	M3S 3040 T 4XL	M3S 3540 T 4XL	M3S 3540T 4XL/WI
Technical data		Gas-cooled	Gas-cooled	Gas-cooled	Gas-cooled	Water-cooled
Material thickness	mm	0.6-8	0.6-10	0.5-12	0.5-14	1.0-14
Welding current setting range (MIG/MAG)	A	25-200	30-250	30-300	50-350	50-350
Welding current setting range (MMA & TIG)	A	10-200	10-250	10-300	10-350	10-350
Steel wire diameter	mm	0.6-1.0	0.6-1.2	0.6-1.2	0.8-1.6	0.8-1.6
Stainless steel wire diameter	mm	0.8-1.0	0.8-1.2	0.8-1.2	1.0-1.6	0.9-1.6
Aluminium wire diameter	mm	1.0-1.2	1.0-1.2	1.0-1.2	1.0-1.6	1.0-1.6
Duty cycle at 40 °C	% / A	100/155	100/193	100/199	100/221	100/221
Duty cycle at max. welding current	% / A	60/200	60/250	40/300	40/350	40/350
Feed drive	Rollers	4	4	4	4	4
Original ELMAG hose package	MBC	24/4m	24/4m	36/4m	36/4m	501W/4m
Efficiency	>	80%	80%	80%	80%	80%
Power consumption in idle mode	W	25	25	25	25	25
Mains voltage / fuse protection	V / A	400/16	400/16	400/16	400/32	400/32
Order data						
Order number		15225	15228	15231	15234	15239
Instead of RRP excl. VAT		1,427.60	1,612.60	1,908.60	2,438.60	3,190.60
RRP excl. VAT		1,189.00	1,349.00	1,579.00	1,999.00	2,599.00



**NEW!**

## MIG/MAG, MMA/E manual, TIG welding inverter

**P35 1825M 2L | [elmag.eu/15204](http://elmag.eu/15204)**

- > 3 welding processes in one device, synergic operation in MAG process
- > Max. 180 amps at 25% duty cycle, infinitely variable 20-180 A
- > Mono-phase 1~230 V, compliant with Ecodesign directive as energy efficiency > 85%
- > 2-roller drive incl. gear rim connection to the pressure roller made of die-cast aluminium
- > Incl. 2-cycle, 4-cycle & spot welding function, in MIG/MAG mode: Inductance, BBT (BurnBackTime) wire burnback and in MMA mode: Hot start & arc force adjustable
- > Gas-shielded cored wire welding also possible with optional accessories and polarity reversal
- > Material thickness: MAG 0.8-5 mm / MMA welding electrodes: Ø 1.6-4.0 mm

### Extensive standard equipment:

Hose package MBC 15/3 m, earth cable 25 mm<sup>2</sup>/3 m, electrode holder welding cable 25 mm<sup>2</sup>/4 m, gas hose incl. quick fit quick connector DN5 / 2.5 m, pressure regulator with 2 pressure gauges incl. quick fit coupling DN5, feed rollers for 0.6/0.8/0.9/1.0 mm wire

### Optionally available:

STEEL SET mixed gas (welding wire G<sub>3</sub>Si 1 0.8 mm/5 kg & 20 litres of mixed gas) [elmag.eu/00281](http://elmag.eu/00281) (RRP: **€329.-** excl. VAT)

TIG hose package SRC 26V/4m [elmag.eu/15810](http://elmag.eu/15810) (RRP: **€156.-** excl. VAT)

Argon steel cylinder 20 litres [elmag.eu/54242](http://elmag.eu/54242) (RRP: **€ 425.-** excl. VAT)



**STEEL SET mixed gas**

**+** FOR FREE! Wear parts set

INSTEAD OF PRICE EXCL. VAT  
~~754.-~~  
**DISCOUNT -21%**  
**599.-**



## MMA/E manual welding inverter

**SD 1635M / 2035M PFC/MV & SET**

**DISCOUNT UP TO -16%**

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, Anti Stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan, JOB function (10 welding programs can be stored in the memory)
- > PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage, when using a power generator or with long supply cables (up to 100m / 3x2.5mm<sup>2</sup>)
- > Suitable for repair / assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture and metal construction
- > Incl. 4 m electrode holder welding cable 25 mm<sup>2</sup> / plug Ø 13 mm, 35/50 mm<sup>2</sup> 3 m earth cable 25 mm<sup>2</sup> / plug Ø 13 mm, 35/50 mm<sup>2</sup>, carrying strap




**NEW!**

**SD 1635M PFC/MV**

**+** Now also included in the SET-K!

Large transport case, 20 pcs. rutile welding electrodes each Ø 2.5 x 350 mm & 3.2 x 350 mm

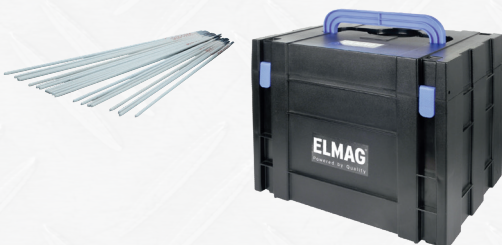

Models		SD 1635M PFC/MV	SD 2035M PFC/MV
Technical data		MMA	TIG
Welding current setting range	A	10-160	10-90
Weldable electrodes Ø	mm	1.6-4.0	1.0-2.4
Duty cycle at max. welding current at 40°C	% / A	35/160	35/90
100% duty cycle at welding current at 40°C	% / A	100/105	100/60
Protection type	IP	IP23	IP23
Mains voltage / fuse protection	V / A	230/16	110/16
Weight	kg	5.6	5.7
Order data			
Order number		<b>15010</b>	<b>15015</b>
Instead of RRP excl. VAT		395.00	436.00
RRP excl. VAT		<b>375.00</b>	<b>415.00</b>
Order data SET-K		SD 1635M PFC/MV	SD 2035M PFC/MV
Order number		<b>15011</b>	<b>15016</b>
Instead of RRP excl. VAT		509.00	561.00
RRP excl. VAT		<b>429.00</b>	<b>475.00</b>

## MMA/E manual welding inverter

### SD 2560T & SD 4060T CEL

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, anti-stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100m extension cable (5 x 2.5 mm<sup>2</sup>)
- > Suitable for repair/assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture, metal construction and pipeline construction  
**Comprehensive standard equipment**  
Model SD 2560T: 4m electrode holder welding cable 35 mm<sup>2</sup> / plug Ø 13 mm, 35/50 mm<sup>2</sup>, 3m earth cable 35 mm<sup>2</sup> / plug Ø 13 mm, 35/50 mm<sup>2</sup>  
Model SD 4060T CEL: 4m electrode holder welding cable 50mm<sup>2</sup> / plug-Ø 13 mm, 35/50mm<sup>2</sup>, 3m ground cable 50 mm<sup>2</sup> / plug Ø 13mm, 35/50mm<sup>2</sup>



SD 4060T CEL

WELDING

Models		SD 2560T		SD 4060T CEL	
Technical data		MMA	TIG	MMA	TIG
Welding current setting range	A	10-250		20-400	
Weldable electrode Ø	mm	1.6-5.0	1.0-3.2	1.6-6.0	1.0-4.0
Duty cycle at max. welding current at 40°C	% / A	60/250		60/400	
100% duty cycle at welding current at 40°C	% / A	100/200		100/325	
Input power I1 max. / I1 eff.	A	20/15.5	16/12.4	35/27	27/21
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	400/16		400/32	
Weight	kg	11.3		23.2	
Order data					
Order number		15020		15030	
Instead of RRP excl. VAT		686.00		1,269.00	
RRP excl. VAT		649.00		1,199.00	

Optional accessories for SD 1635M PFC/MV - SD 4060T CEL for LIFT-TIG welding	Order number	RRP excl. VAT
TIG tube set SRC 26V/4m, incl. equipment set	15810	156.00
TIG tube set SRC 26V/8m, incl. equipment set	15811	209.00
Gas hose 2.5 m for argon/Co2, quick coupling	15135	21.00
Argon pressure regulator, 0-12 litres/min., incl. coupling	54106	81.00
Steel cylinder Argon 4.6, 20 litres / 200 bar filled	54242	425.00



TIG hose package

## TIG DC, MMA/E manual welding inverter


### DD 2050M P/PFC/MV ECO-SET-G DD 2560T P ECO-SET-G

- > DC constant or pulsed welding current (0.5-200 Hz), Hot Start+, Arc Force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > DD 2050M P/PFC/MV: PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage or long supply cables
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100 m of extension cable (3 or 5 x 2.5 mm<sup>2</sup>)
- > Ideal for steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, etc.
- > TIG hose package SRC 26/4 m - HF incl. UP/DOWN Current control on the handle, 4 m electrode holder cable, 3 m earth cable, pressure regulator & 2.5 m gas hose with quick-release couplings, etc.




Now included in the ECO-SET-G!

Models		DD 2050M P/PFC/MV		DD 2560T P	
Technical data		TIG	MMA	TIG	MMA
Welding current setting range	A	5-200		5-250	
Weldable electrodes Ø	mm	1.0-3.2	1.6-5.0	1.0-3.2	1.6-5.0
Duty cycle at max. welding current @ 40°C	% / A	50/200	30/200	60/250	
100% duty cycle at welding current at 40°C	% / A	100/145	100/135	100/195	
Input power I1 max. / I1 eff.	A	21/14.8	32/17.5	14/11	18/14
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	230/16	230/32	400/16	
Weight	kg	10.2		12.6	
Order data					
Order number		15041		15046	
Instead of RRP excl. VAT		1,090.00		1,225.00	
RRP excl. VAT		899.00		1,059.00	

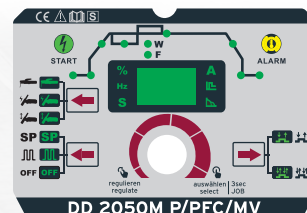

Operating panel DD 2050M P/PFC/MV

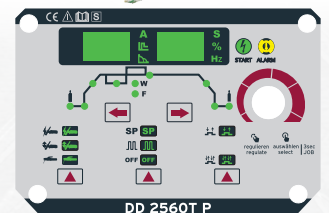


Operating panel DD 2560T P



**+** Now included in the ECO-SET-G!

TIG hose package SRC 26/4m – HF incl. UP/DOWN current control on the handle

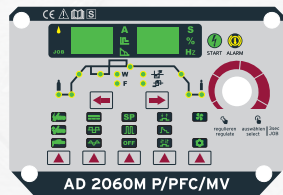

Operating panel  
AD 2060M

**+** Now included in the ECO-SET-W!

TIG hose package SRC 18/4m – HF incl. UP/DOWN current control on the handle  
In addition to ECO-SET-G: Water cooling unit, transport trolley & cooling liquid

## TIG AC/DC, MMA/E manual welding inverter AD 2060M P/PFC/MV ECO-SET-G & W




- > AC/DC constant or pulsed welding current (0.3-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > Multi-voltage version, 2-step/repeat/4-step or spot welding, JOB memory
- > PFC design for stable welding process with fluctuating mains voltage, e.g. power generator operation or long supply cables (up to 100 m / 3 x 2.5 mm<sup>2</sup>)
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.

Models	AD 2060M P/PFC/MV	
Technical data	TIG	MMA
Welding current setting range	A	5-200
Weldable electrodes Ø	mm	1.0-4.0
Duty cycle at max. welding current at 40°C	% / A	60/200
100% duty cycle at welding current at 40°C	% / A	35/200
Input power I1 max. / I1 eff.	A	100/155
Slow fuse protection	AT	16
Protection type	IP	32
Mains voltage / fuse protection	V / A	IP23
Weight	kg	230/16
		230/32
		15.5
Order data ECO-SET-G		
Order number	15061	
Instead of RRP excl. VAT	1,895.00	
RRP excl. VAT	1,479.00	
Order data ECO-SET-W		
Order number	15062	
Instead of RRP excl. VAT	2,855.00	
RRP excl. VAT	2,349.00	



**+** Now included in the ECO-SET-G!

TIG hose package SRC 26/4m – HF incl. UP/DOWN current control on the handle

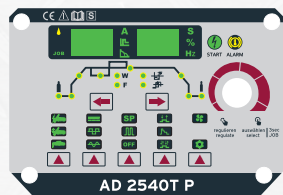

Operating panel  
AD 2540T P

**+** Now included in the ECO-SET-W!

TIG hose package SRC 18/4m – HF incl. UP/DOWN current control on the handle  
In addition to ECO-SET-G: Water cooling unit, transport trolley & cooling liquid

## TIG AC/DC, MMA/E manual welding inverter AD 2540T P ECO-SET-G & W



- > AC/DC constant or pulsed welding current (0.5-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > 2-cycle/repeat/4-cycle or spot welding, JOB memory
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.

Models	AD 2540T P	
Technical data	TIG	MMA
Welding current setting range	A	10-250
Weldable electrodes Ø	mm	1.0-4.0
Duty cycle at max. welding current at 40°C	% / A	1.6-5.0
100% duty cycle at welding current at 40°C	% / A	40/250
Input power I1 max. / I1 eff.	A	100/158
Open-circuit voltage	V	15/9.5
Protection type	IP	71
Mains voltage / fuse protection	V / A	IP215
Weight	kg	400/16
		15.5
Order data ECO-SET-G		
Order number	15066	
Instead of RRP excl. VAT	2,240.00	
RRP excl. VAT	1,899.00	
Order data ECO-SET-W		
Order number	15067	
Instead of RRP excl. VAT	3,300.00	
RRP excl. VAT	2,805.00	



## Tungsten electrode grinder

**WSG 4** | [elmag.eu/56470](http://elmag.eu/56470)

- > Precise sanding of tungsten electrodes ensures the best welding results
- > Practical hand tool in a case for mobile use on the construction site or in the workshop
- > For sanding or cutting electrodes to length
- > Grindable electrode Ø: 1.0/1.6/2.0/2.4/3.2/4.0 mm
- > Various sanding angles: 15/18/22.5/30°
- > Grindable electrode length min: 30 mm
- > Grinding disc Ø: 33.5 mm (can be used on both sides)
- > Speed: (adjustable) max. 11,000 rpm
- > Engine power: 750 W / Mains connection 230 V / Weight: 1.6 kg



DISCOUNT  
INSTEAD OF PRICE EXCL. VAT  
~~439.-~~  
**369.-**

WELDING

## Tungsten electrode grinder

**WSG 5** | [elmag.eu/56475](http://elmag.eu/56475)

- > Practical tabletop device with integrated stop for setting the optimum grinding length
- > Clamping and grinding using electrode clamps is also easy to carry out with leather gloves, electrodes with spherical caps or alloyed metal drops can also be ground
- > The grinding process takes place in the longitudinal direction of the electrode and thus improves the ignition properties, ensures a more stable arc and longer service life
- > Grindable electrode Ø: 1.6/2.0/2.4/3.2/4.0/5.0 mm
- > Infinitely adjustable sanding angle: 10-60°
- > Grindable electrode length min: 35 mm
- > Grinding disc Ø: 90 mm
- > Speed: 6,500 rpm
- > Engine power: 60 W / Mains connection: 230 V / Weight: 4.0 kg


DISCOUNT  
INSTEAD OF PRICE EXCL. VAT  
~~469.-~~  
**399.-**



## TIG high-quality accessories

**TIG HIGH PERFORMANCE FRK STYLE set with 42 parts**  
for SR & SRC 17 | 26 | 18 | [elmag.eu/59550](http://elmag.eu/59550)

- > With a secondary replaceable gas screen in the ceramic or quartz cup gas sleeve, these attachments offer a wider gas coverage for better gas protection and higher quality welding results.
- > The tungsten electrode can protrude up to 35mm and therefore also provides access to hard-to-reach places when welding with improved visibility.
- > The set includes standard ceramic and transparent high-performance quartz gas sleeves that can be screwed or pressed on.
- > Traditionally used for welding demanding and exotic materials, the FRK system has now become widespread because it offers welders a higher degree of flexibility with a single device.
- > The FRK series nozzles can be used for all materials and processes, including pulse welding when using quartz cup gas sleeves.
- > The gas sieve can be easily replaced or changed using the assembly and disassembly tool.

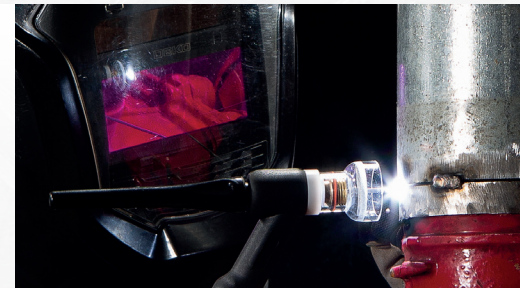

Detailed brochure



DISCOUNT  
INSTEAD OF PRICE EXCL. VAT  
~~225.-~~  
**199.90**



**FRK-STYLE SET 42 pieces**




INSTEAD OF PRICE EXCL. VAT ~~1,405.-~~ **DISCOUNT -10%**  
**1,265.-**

## Induction heater iDUCTOR W2300 | [elmag.eu/59240](http://elmag.eu/59240)

DISCOUNT UP TO  
**-11%**

- > Output power: 2.3 kW, Mains connection: 230 volt
- > Lightning-fast heating without an open flame
- > Loosening stuck bolts, nuts, tie rods, etc.
- > Incl. induction coils Ø 23 mm/M10/L=150 mm & Ø 18 mm/M8/L=150 mm and flexible induction cable L=2 m
- > Optional induction spirals available in various sizes Ø 18–52 mm (M8–M30), lengths and designs, e.g. for heating tie rods, as a pad for heating surfaces, e.g. to remove stickers, decorative mouldings, adhesive or paint residues, etc. or as a flexible cable L=1.5–3.5 m to be laid individually around the workpiece to be heated

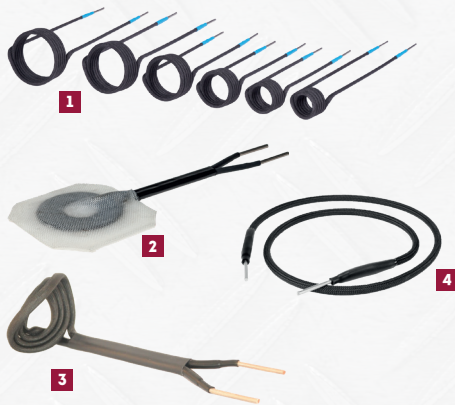

Accessories	Order number	Instead of RRP excl. VAT	RRP excl. VAT
<b>1</b> Induction coil set, 6 pieces, for iDuctor W2300, max. 325 °C	<b>59243</b>	277.00	<b>249.00</b>
<b>2</b> Flat induction coil, IPAD 1010, max. 150 °C	<b>59252</b>	160.00	<b>144.00</b>
<b>3</b> Induction coil for tie rods, ST70-200, max. 150 °C	<b>59253</b>	115.00	<b>104.00</b>
<b>4</b> Induction cable straight L = 1,500 mm, max. 325 °C	<b>59255</b>	50.00	<b>45.00</b>
Induction cable straight L = 2000 mm, max. 325 °C	<b>59256</b>	61.50	<b>55.50</b>
Induction cable flexible L = 1,100 mm, max. 650 °C	<b>59257</b>	88.00	<b>79.00</b>
Induction cable flexible L = 2000 mm, max. 650 °C	<b>59258</b>	162.00	<b>146.00</b>
Induction cable flexible L = 2500 mm, max. 650 °C	<b>59259</b>	201.00	<b>181.00</b>
Induction cable flexible L = 3000 mm, max. 650 °C	<b>59260</b>	257.00	<b>231.50</b>
Induction cable flexible L = 3500 mm, max. 650 °C	<b>59261</b>	312.00	<b>279.00</b>



## Induction heater, water-cooled iT 3.5K230 LCD | [elmag.eu/59200](http://elmag.eu/59200)



- > Output power: 3.5 kW
- > incl. user-friendly LCD display
- > For heating and loosening stuck and rusted parts: Chassis parts, exhaust systems, brake lines, body parts, drive shafts, lambda probes, axle parts
- > Quick loosening of wheel nuts and bolts
- > 5 selectable heating levels, 230 volt, only 16 kg
- > 3 m hose package, 2.6 m supply cable

**FREE NOW!**

**Induction heating head for frontal heating**



INSTEAD OF PRICE EXCL. VAT ~~3,240.-~~ **DISCOUNT -15%**  
**2,739.-**



## Induction heater, water-cooled iT 5K400 LCD | [elmag.eu/59203](http://elmag.eu/59203)



- > Output power: 5 kW
- > incl. user-friendly LCD display
- > Possible uses like iT 3.5K230 LCD
- > 5 selectable heating levels, 400 volt
- > 3 m hose package, 8 m supply cable
- > Weight 66 kg

**FREE NOW!**

**Induction heating head for frontal heating**



INSTEAD OF PRICE EXCL. VAT ~~5,456.-~~ **DISCOUNT -15%**  
**4,639.-**

## Induction heater, water-cooled

**HDi 11K400 TC** | [elmag.eu/59206](http://elmag.eu/59206)

- > Output power: 11 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touch-screen with temperature display of the cooling liquid, electronics and transformer (°C/F)



DISCOUNT  
**-9%**

Models		
Technical data		HDi 11K400 TC
Performance	kW	11
Induction hose package length	m	4.25
Supply cable from the generator	m	8
Selectable heating output	Steps	5
Connector plug	-	CEE 16 A
Grid connection/phases	V/~	400/~3
Power frequency	Hz	50/60
Slow fuse protection	AT	16
Weight	kg	120
Order data		
Order number		<b>59206</b>
Instead of RRP excl. VAT		8,572.00
RRP excl. VAT		<b>7,839.00</b>



**FREE NOW!**

**Induction heating head for frontal heating**



## Water-cooled induction heater

**HDi 16K400 TC** | [elmag.eu/58227](http://elmag.eu/58227)

**HDi 225K400 TC** | [elmag.eu/58219](http://elmag.eu/58219)

- > Output power: 16 or 22.5 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touch-screen (HDi 225K400 TC with timer function), temperature display of the cooling liquid, electronics and transformer (°C/F)

16K400 TC

225K400 TC



DISCOUNT  
**-15%**

Models			
Technical data		HDi 16K400 TC	HDi 225K400 TC
Performance	kW	16	22.5
Induction hose package length	m	4.25	6
Supply cable from the generator	m	8	8
Selectable heating output	Steps	5	5
Connector plug	-	CEE 32 A	CEE 32 A
Grid connection/phases	V/~	400/~3	400/~3
Power frequency	Hz	50/60	50/60
Slow fuse protection	AT	25	32
Weight	kg	130	140
Order data			
Order number		<b>58227</b>	<b>58219</b>
Instead of RRP excl. VAT		11,196.00	11,676.00
RRP excl. VAT		<b>9,519.00</b>	<b>9,925.00</b>



**HDi 16K400 TC**

**FREE NOW!**

**Induction heating head for frontal heating**





## V-belt drilling machine SETS KBM series

- > Solid drilling table with integrated clamping plate, T-slot and integrated coolant channel
- > Drive via quality V-belt, drilling spindle with precision bearing
- > Ground steel column with toothed rack
- > Safety switch with emergency stop button and zero-voltage release

**Extensive standard equipment:** Quick-action drill chuck, LED lighting, R/L barrel (for models 16-32), Cone mandrel, drive-out wedge, tool set

**Now included in the SET!**

Cutting oil spray 350 ml, machine vice, 2 clamping screws & HSS twist drill bit cassette, 1-13 mm for KBM 13/16 & 14.5 - 30 mm for KBM 25/32

DISCOUNT UP TO  
**-12%**



Models		KBM 13 TN	KBM 16 TN	KBM 16 SN	KBM 25 TN	KBM 25 SN	KBM 32 SN
<b>Technical data</b>							
Drilling capacity in steel	mm	13	16	16	25	25	32
Spindle holder	MK	MK 2	MK 2	MK 2	MK 3	MK 3	MK 4
Speed range	rpm	500-2,500	100-2,000	100-2,000	100-2,000	100-2,000	80-1,700
Speed steps	-	5	12	12	16	16	12
Quill stroke	mm	60	80	80	80	80	120
Spindle projection	mm	127	195	195	195	213	260
Drilling table surface	mm	197 x 197	300 x 310	300 x 310	355 x 355	355 x 355	475 x 425
Mains connection	V/Hz	230 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg	30	56	64	72	81	130
<b>Order data</b>							
Order number		<b>16030</b>	<b>16031</b>	<b>16032</b>	<b>16035</b>	<b>16033</b>	<b>16034</b>
Instead of RRP excl. VAT		592.80	896.40	944.40	1,053.60	1,232.40	1,488.00
RRP excl. VAT		<b>440.00</b>	<b>660.00</b>	<b>705.00</b>	<b>790.00</b>	<b>920.00</b>	<b>1,100.00</b>

## V-belt drilling machine SET

**KBM 25 S Vario** | [elmag.eu/16037](http://elmag.eu/16037)

DISCOUNT UP TO  
**-10%**

- > Digital speed display
- > Control lever for speed adjustment
- > Speed adjustment by means of variator disc
- > Telescopic chuck protection CE
- > LED work light

**Now included in the SET!**

Cutting oil spray 350 ml, machine vice, 2 clamping screws and HSS twist drill cassette



Models		25 S Vario
<b>Order data</b>		
Drilling capacity in steel	mm	25
Spindle holder	MK	MK3
Speed range	rpm	440-2,200
Speed steps	-	variable
Quill stroke	mm	150
Column diameter	mm	80
T-groove width	mm	14
Spindle projection	kg	215
Quill distance from table	mm	650
Engine power	mm	1,500
Mains connection	W	400 / 50-60
Weight	V/Hz	95
<b>Order data</b>		
Order number		<b>16037</b>
Instead of RRP excl. VAT		1,392.00
RRP excl. VAT		<b>1,040.00</b>

## Geared pillar drills GBM 3/25 & 3/30 - Sets

- > Automatic quill feed (with GBM 3/30 SNA)
- > Digital drilling depth indicator
- > Machined base plate
- > Two-stage engine
- > Smooth-running high-quality gearbox with heavy-duty helical gearing
- > High-speed, up to 3,010 rpm
- > 4 feed stages (with GBM 3/30 SNA)
- > Feed rates 0.1 / 0.15 / 0.22 / 0.3 mm/rev
- > MK3 spindle clamp
- > 400 volt voltage

DISCOUNT  
**-10%**

**Now included in the SET!**

Cutting oil spray 350 ml,  
machine vice,  
2 clamping screws and  
HSS twist drill cassette



GBM 3/25 TNE



GBM 3/30 SNA

Models	Drilling capacity in steel	Speed levels / range	Quill stroke	Quill distance to table	Projection	Motor power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	mm	W	kg			
GBM 3/25 TNE	25	8 / 105-2,900	120	0-580	255	900/650	130	82002	3,576.00	2,680.00
GBM 3/25 SNE	25	8 / 105-2,900	120	0-840	255	900/650	180	82005	3,888.00	2,910.00
GBM 3/30 SNA	30	8 / 75-3,010	150	50-820	320	900/1,200	210	82007	5,460.00	4,100.00

## Geared pillar drills GBM SGA series - set



- > Drilling capacity 35.40 or 50 mm
- > Electromagnetic quill stroke (0.1 / 0.15 / 0.22 / 0.33 mm/rev, 0.1 / 0.2 / 0.3 mm/rev or 0.07 / 0.15 / 0.26 / 0.4 mm/rev)
- > Piston stroke of 150 or 180 mm
- > Spindle extension 320, 325 or 360 mm
- > MK4 spindle clamp
- > Automatic tool ejection
- > Smooth-running high-quality gearbox with heavy-duty helical gearing
- > Drill spindle with precision bearing right/left rotation
- > Tapping mode with reversible direction of rotation that can be switched on the operating lever
- > GBM 4/40 & 4/50: Incl. integrated coolant unit

DISCOUNT UP TO  
**-11%**

**Now included in the SET!**

Cutting oil spray 350 ml,  
machine vice,  
2 clamping screws and  
HSS twist drill cassette



GBM 4/35 SGA



GBM 4/40 SGA

Models	Drilling capacity in steel	Speed levels / range	Quill stroke	Quill distance to table	Motor power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	W	kg			
GBM 4/35 SGA	35	8 / 75-3,010	150	10-860	1,500/1,800	310	82013	6,798.00	4,990.00
GBM 4/40 SGA	40	12 / 70-2,600	150	45-600	2,200/1,500	670	82008	8,712.00	6,540.00
GBM 4/50 SGA	50	12 / 42-2,050	180	60-600	2,800/2,200	740	82009	10,860.00	8,140.00



**GBM 4/40 SGA TOUCH**

**GBM 4/50 SGA TOUCH**

## Geared pillar drills Series GBM TOUCH

- > Drilling capacity in steel 40, 50 or 60 mm
- > Piston stroke of 190 or 200 mm
- > Spindle extension 340, 360 or 370 mm
- > Electronically controlled piston feed
- > Electromagnetic piston feed (0.1 / 0.2 / 0.3 / 0.4 or 0.08/0.12/0.17/0.24/0.35/0.5 mm/rev)
- > Variable speed adjustment
- > Electronically controlled automatic tapping unit with depth adjustment for blind holes
- > Preset thread cutting programs
- > Motorised table height adjustment
- > Tiltable and rotatable work table
- > Intuitive touch-screen guides you step by step through the settings – so only minimal basic knowledge is required

DISCOUNT UP TO  
**-16%**



Models	Drilling capacity in steel	Speed levels / range	Piston feed	Motor power	Connection voltage	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	rpm	Steps	kW	V / Hz	kg			
GBM 4/40 SGA TOUCH	40	60-2,600	4	2.0	400/50	565	<b>82106</b>	<del>13,488.00</del>	<b>9,990.00</b>
GBM 4/50 SGA TOUCH	50	50-2,000	6	3.0	400/50	720	<b>82107</b>	<del>17,328.00</del>	<b>12,190.00</b>
GBM 5/60 SGA TOUCH	60	50-2,000	Variable	4.0	400/50	800	<b>82108</b>	<del>19,488.00</del>	<b>14,380.00</b>



**MFB 45 SGV**



## Gear milling and drilling machine MFB series

- > High-quality, high-tech machines for all applications
- > High-performance gearbox running in an oil bath
- > Integrated thread cutting device
- > Milling spindle with precision bearing and pull-in spindle for high safety
- > Smooth-running cross table with T-slots and coolant channel
- > X-axis cross table with infinitely adjustable feed and rapid traverse
- > Integrated coolant system with return flow, tank in the machine base

DISCOUNT UP TO  
**-18%**



**FREE NOW!**

**Machine stand  
for MFB 45 TGV**

Models		MFB 40 TGV	MFB 45 TGV	MFB 45 SGV
Technical data				
Drilling capacity in steel	mm	40	45	45
Milling performance face/shank	mm	76/32	80/32	80/32
Quill stroke	mm	120	120	120
Milling table surface	mm	730 × 210	800 × 240	730 × 210
T-groove width	mm	14	14	14
Speed range	rpm	6/75-1,600	12/75-3,200	12/75-3,200
Table distance X × Y	mm	500 × 210	455 × 180	375 × 200
Spindle projection	mm	210	260	270
Quill distance from table	mm	25-450	25-475	0-790
Mains connection	V/Hz	400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg	315	278	350
Order data				
Order number		<b>82153</b>	<b>82100</b>	<b>82101</b>
Instead of RRP excl. VAT		<del>3,828.00</del>	<del>4,920.00</del>	<del>5,496.00</del>
RRP excl. VAT		<b>2,630.00</b>	<b>3,690.00</b>	<b>3,740.00</b>

## Gearbox milling and drilling machine

**MFB 50 L** | [elmag.eu/82151](http://elmag.eu/82151)

- > Right and left rotation
- > Integrated thread cutting device
- > Drilling depth scale and stop
- > Halogen milling table lighting
- > Automatic strokes in X/Y
- > Extra-large throat depth 800 × 240 mm
- > Incl. digital position indicator and coolant pump



DISCOUNT  
**-25%**

METALWORKING

Models	MFB 50 L	
Technical data		
Drilling capacity in steel	mm	50
Milling performance face/shank	mm	100/40
Quill stroke	mm	120
Milling table surface	mm	800 × 240
T-groove width	mm	14
Speed levels / range	rpm	8/115-1,750
Table distance X × Y	mm	360 × 160
Spindle projection	mm	250-700
Quill distance from table	mm	60-356
Mains connection	V/Hz	400 / 50-60
Weight	kg	610
Order data		
Order number	<b>82151</b>	
Instead of RRP excl. VAT	11,988.00	
RRP excl. VAT	<b>7,490.00</b>	



**MFB 50 L incl. digital 3-axis position indicator**

## Tool milling machines

**WFM Servo drive series**

- > Automatic stroke and rapid feed X/Y/Z
- > Ball screw and stepless drives on all axes X/Y/Z
- > Horizontal and vertical milling table
- > Vertical milling head incl. adjustable boring sleeve
- > Digital speed display of the milling spindle
- > Incl. digital position indicator and coolant pump
- > Optionally available: Table enclosure



DISCOUNT UP TO  
**-18%**

Models	WFM 210	WFM 310	WFM 410
Technical data			
Drilling capacity in steel	mm 50	50	50
Milling performance of face-milling cutters	mm 125	125	150
Milling performance of end mills	mm 40	40	50
Spindle holder	ISO ISO 40	ISO 40	ISO 40
Speed range	rpm 40-2,000	40-2,000	40-2,000
Speed steps	- variable	variable	variable
Quill stroke	mm 65	65	65
Milling table surface	mm 750 × 320	800 × 400	850 × 450
Table distance X × Y	mm 405 × 305	500 × 400	600 × 450
Vertical table surface	mm 890 × 225	1020 × 225	1,190 × 250
Engine power	W 3,700	3,700	5,700
Mains connection	V/Hz 400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg 1,450	1,550	1,750
Order data			
Order number	<b>82125</b>	<b>82126</b>	<b>82127</b>
Instead of RRP excl. VAT	50,616.00	55,140.00	59,688.00
RRP excl. VAT	<b>38,590.00</b>	<b>37,760.00</b>	<b>42,340.00</b>



**WFM 410 Servo drive**



## Universal lathe

**PROFI 1000/180 N** | [elmag.eu/88153](http://elmag.eu/88153)

**DISCOUNT**  
**-10%**



- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > With digital position indicator
- > Durable main gearbox with gears running in an oil bath
- > Spindle bore 51 mm for extra-long shafts
- > CAMLOCK D1-5 spindle clamp DIN 55029, MK 6 spindle taper

### Extensive standard equipment:

Four-jaw face plate chuck Ø 200 mm, clamping disk Ø 320 mm, 2 fixed centring points, MK 3 revolving centring point, travelling rest, steady rest & micrometer

**FOR FREE!** RÖHM lathe chuck and quick-change steel holder set



Model		PROFI 1000/180 N
Technical data		
Centre width / Centre height	mm	1,000/180
Turning diameter over bed / slide	mm	360/224
Spindle bore	mm	51
Spindle speeds Number / range	rpm	8 / 70-2,000
Engine power, 400 volt	kW	1.5
Weight	kg	520
Order data		
Order number		<b>88153</b>
Instead of RRP excl. VAT		11,532.00
RRP excl. VAT		<b>8,650.00</b>



## Universal lathe

**INDIVIDUAL 1000/200** | [elmag.eu/88168](http://elmag.eu/88168)

**DISCOUNT**  
**-10%**



- > **Compact centre lathe and turning machine**
- > **Perfect for training and maintenance**
- > Coolant container and pump integrated in the machine base
- > Variable speed control incl. digital display
- > MK5 spindle clamp
- > LED lighting
- > Automatic central lubrication
- > Digital position indication for 3 axes with colour display
- > Electromagnetic motor brake
- > Large protective cover for a clean working environment

**FOR FREE!** RÖHM lathe chuck and quick-change steel holder set



Model		INDIVIDUAL 1000/200
Technical data		
Centre width / Centre height	mm	1,000/200
Turning diameter over bed / slide	mm	400/260
Spindle bore	mm	51
Spindle speeds Number / range	rpm	variable / 45-2,500
Engine power, 400 volt	kW	2.4
Weight	kg	850
Order data		
Order number		<b>88168</b>
Instead of RRP excl. VAT		18,480.00
RRP excl. VAT		<b>13,880.00</b>



## Universal lathe

**INDUSTRIE 1000/230 HD** | [elmag.eu/88173](http://elmag.eu/88173)

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > Powerful and robust for trade & industry
- > 80 mm spindle bore
- > Coolant container and pump integrated in the machine base
- > Incl. digital 3-axis position indicator


**Extensive standard equipment:**

Four-jaw face plate chuck Ø 315 mm, clamping disk Ø 350 mm, 2 fixed centring points, MK 5 revolving centring point, travelling rest, steady rest & micrometer



**DISCOUNT**  
**-11%**

**METALWORKING**

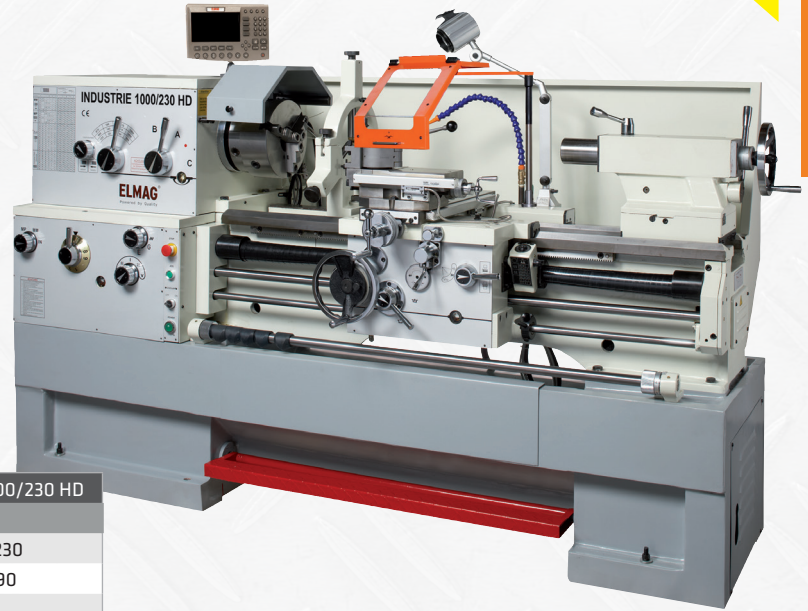

Model		INDUSTRIE 1000/230 HD
Technical data		
Centre width / Centre height	mm	1,000/230
Turning diameter over bed / slide	mm	460/290
Spindle bore	mm	80
Spindle speeds Number / range	rpm	12 / 25-1,800
Engine power, 400 volt	kW	5.5
Weight	kg	2,635
Order data		
Order number		<b>88173</b>
Instead of RRP excl. VAT		32,016.00
RRP excl. VAT		<b>23,750.00</b>

**FOR FREE!** RÖHM lathe chuck and quick-change steel holder set




## Universal lathe

**PREMIUM CU 400 RD Vario** | [elmag.eu/88625](http://elmag.eu/88625)

- > Hardened and precision-ground lathe spindle
- > Smooth-running lathe spindle, stroke reverse switch
- > Solid tail-stock with taper turning adjustment
- > Precise slide guidance, adjustable
- > RD Vario models with infinitely variable speed control
- > Incl. digital 3-axis position indicator
- > **Optionally available:** Travelling rest, steady rest, steady rest with ball bearing guide, face plate & 4-jaw face plate chuck



**DISCOUNT**  
**-13%**

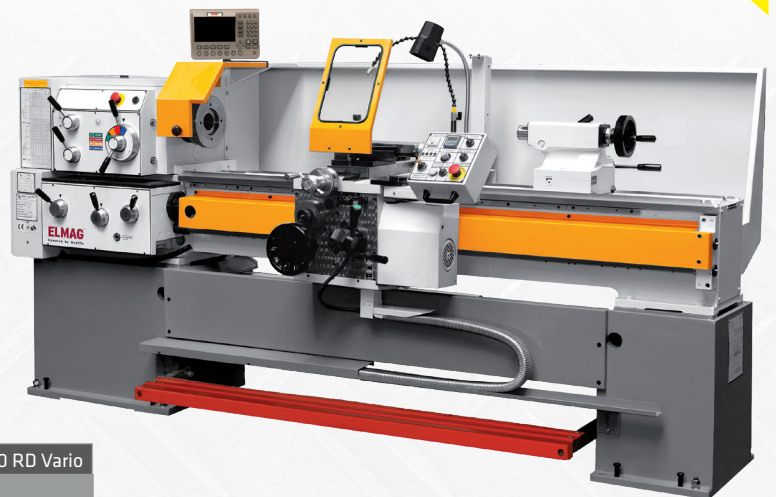

Model		PREMIUM CU 400 RD Vario
Technical data		
Centre width / Centre height	mm	1,000/200
Turning diameter over bed / slide	mm	400/230
Spindle bore	mm	52
Spindle speeds Number / range	rpm	variable / 18-2,120
Engine power, 400 volt	kW	4
Weight	kg	1,590
Order data		
Order number		<b>88625</b>
Instead of RRP excl. VAT		51,432.00
RRP excl. VAT		<b>37,490.00</b>

**FOR FREE!** RÖHM lathe chuck and quick-change steel holder set



**SUPER-SET**



## Metalworking circular sawing machine

**MKS 315 RLSS-N** | [elmag.eu/78022](http://elmag.eu/78022)



DISCOUNT  
**-11%**

- > For steel, iron, light metals, solid material and profiles
- > 2 speeds 40 and 80 rpm, incl. coolant system
- > Most precise burr-free cut at any cutting angle
- > **SUPER SET** incl. base, material stand, saw blade HSS and coolant concentrate, dilutable 1:10

**Now included in the SET!**



Model	MKS 315 RLSS-N	
Cutting range 90°	mm	90 / 80 × 80 / 115 × 70
Cutting range 45°	mm	80 / 70 × 70 / 70 × 70
Clamping width vice	mm	120
Saw blade diameter	mm	315
Electric motor	kw / V	1.5 and 2.2 / 400
Order number	78022	
Instead of RRP excl. VAT	4,488.00	
RRP excl. VAT	<b>3,325.00</b>	

## Metalworking band saws

**TB Vario series**

DISCOUNT UP TO  
**-17%**

- > Lightweight metal band sawing machine for small to medium-sized sawing jobs
- > Super-quiet – sound pressure level at cutting load steel only 65 dB
- > High-quality band saw blade made of bimetal cobalt for cutting with and without coolant
- > Easy transportation – with transport chain, chain hook and carrying handle
- > Comprehensive features: Quick-action vice, angle clamp & stop, etc.



**TB 125 Vario**

Models		TB 125 Vario	TB 150 Vario
Maximum cutting capacity	mm	122 × 122	150 × 140
Saw blade dimensions	mm	1,440	1,735
Maximum vice opening	mm	>125	>150
Cutting angle	°	0–60	0–60
Cutting speed	m/min	30–80	30–63
Engine power	W	375	450
Mains voltage / frequency	V/Hz	230 / 50–60	230 / 50–60
Weight	kg	21	27
Order data			
Order number		<b>78131</b>	<b>78132</b>
Instead of RRP excl. VAT		864.00	1,368.00
RRP excl. VAT		<b>610.00</b>	<b>950.00</b>

## Combination sanding machine

**KSM 150/686** | [elmag.eu/61090](http://elmag.eu/61090)

DISCOUNT  
**-30%**

- > Combination sanding machine for versatile use.
- > Shaping – Regrinding – Sharpening



Model	KSM 150/686	
Sanding disc Ø / width / bore	mm	150 / 20 / 12.7
Sanding speed	m/s	23.4
Sanding belt speed	m/s	15.4
Sanding belt width / length	mm	50/686
Surface grinding area	mm	285 × 50
Speed	rpm	2,980
Engine power	W	250
Mains voltage / frequency	V/Hz	230 / 50–60
Weight	kg	7
Order number	<b>61090</b>	
Instead of RRP excl. VAT	100.00	
RRP excl. VAT	<b>59.00</b>	

## Metalworking circular sawing machine VM-L series

- > Top-performing vertical circular sawing machines for industrial use
- > Rotatable head, 45° to the right - 60° to the left
- > Head rotation blocks at 45° - 0° - 45° - 60°
- > Vice with deburring device
- > Electric pump for lubricating the blade
- > Adjustable stops for vertical travel of the head
- > Rod lock
- > Model 315 incl. roller support arm, Model 350 incl. pole support 1 m
- > Sturdy, heavy-duty construction made of sheet steel
- > Saw blade diameter 315 or 350 mm
- > Incl. chip remover for cleaning the blades
- > Vice opening width 160 mm (VM 315) or 185 mm (VM 350)



DISCOUNT  
**-10%**

METALWORKING

**FREE NOW!**

HSS saw blade

VM 315-L

Models	Cutting area 90°		Cutting area 45° left/right		Cutting area 60° right		Saw blade speed rpm	Electric motor		Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	round	rectangular	round	rectangular	round	square		V	kW				
VM 315-L	100	135 × 80	100	100 × 80	80	70 × 80	17/34	400	1.3-1.9	270	78046	6,330.00	4,740.00
VM 350-L	100	170 × 90	100	125 × 90	90	90 × 90	18/36	400	1.5-2.2	450	78039	9,798.00	7,350.00

## Metal band saws

**HY 305 × 178 | [elmag.eu/78003](http://elmag.eu/78003)**

- > Safe saw blade guidance through adjustable tensioning bearings
- > Precisely adjustable clamping bearings for play-free adaptation
- > Clean thanks to chip remover and chip brush, easy saw band change
- > Reliable with saw blade guard, end switch, finger guard, AutoOFF switch-off, emergency stop, zero-voltage release, CE compliant
- > Plug & Play with oil filling and high-quality bimetal cobalt band saw blade

Model	HY 305 × 178	
Maximum cutting capacity	mm	305 × 178
Saw blade dimensions	mm	2,362 × 19 × 0.9
Cutting angle	°	0-45
Cutting speed 1/min.	m/min	22/34/49/64
Engine power	W	750
Mains voltage / frequency	V/Hz	400 / 50-60
Feed height	mm	530
Weight	kg	140
Order number	78003	
Instead of RRP excl. VAT	1,716.00	
RRP excl. VAT	1,250.00	



DISCOUNT  
**-13%**

Picture shows machine without included saw blade tension display

## Wet-dry sanding block

**NTS 150/200 | [elmag.eu/61035](http://elmag.eu/61035)**

The NTS 150/200 wet/dry sanding block is versatile for wet and dry sanding work, ideal for hobbyists and DIY enthusiasts. The robust metal construction and the large stainless steel water tank ensure a long service life for the sanding machine.

Model	NTS 150/200	
Sanding disc left Ø / width	mm	200/40
Sanding disc right Ø / width	mm	150/20
Sanding disc bore	mm	32
Sanding speed	m/s	23
Speed	rpm	2,980
Engine power	W	250
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	8.2
Order number	61035	
Instead of RRP excl. VAT	108.00	
RRP excl. VAT	65.00	



DISCOUNT  
**-28%**



## Band saw machine EasyCut 275.230 DG

[elmag.eu/78900](http://elmag.eu/78900)

DISCOUNT  
**-10%**



- > The EasyCut series is a universal gravity band saw with a robust cast iron saw frame and saw blade with a height of 27 mm
- > Precise guidance of the saw band thanks to carbide guides
- > The saw frame is mounted with preloaded tapered roller bearings
- > Synchronised brushes for chip removal
- > The feed speed of the saw frame is continuously controlled by a hydraulic cylinder with overflow valve

INSTEAD OF PRICE EXCL. VAT  
~~6,216.-~~  
**DISCOUNT -10%**  
**4,660.-**

	○	□	□	□
0°	230	275 × 180	250 × 230	230
45°R	190	190 × 150	170 × 230	180
60°R	120	120 × 100	120 × 100	100
45°L	170	185 × 100	90 × 230	150

Model	Operating mode	Mitre range	Saw blade speed	Saw blade dimensions	Remaining piece length	Inlet height	Dimensions l × w × h	Drive	Weight
		°	m/min	mm	mm	mm	mm	kW / V / Hz	kg
275.230 DG	manual	-45° to 60°	40/80	2.720 × 27 × 0,9	20	978	1.588 × 1.150 × 1.477	1.1/1.5/3 × 400/50	370



## Band saw machines BOMAR Ergonomic series

DISCOUNT UP TO  
**-14%**

- > Universal band saw machine with a robust cast iron saw frame and 27 mm band saw blade
- > The precise carbide guide of the saw blade is the prerequisite for excellent cutting performance
- > Drive 1.5 or 2.2 kW, 3 × 400 / 50 V / Hz
- > Hydraulic cutting pressure monitoring and infinitely adjustable saw blade speed on semi-automatic models

		320.258 DGH	340.278 DGH	375.308 DGH
○	0°	258	278	308
	45° ▽	210	260	250
	60° ▽	135	155	155
□	0°	250	275	308
	45° ▽	195	230	235
	60° ▽	110	115	105
□	0°	320 × 100	340 × 100	375 × 220
	45° ▽	210 × 100	230 × 100	235 × 200
	60° ▽	135 × 100	145 × 100	150 × 95
□	0°	275 × 250	340 × 275	340 × 308
	45° ▽	185 × 245	230 × 255	220 × 285
	60° ▽	135 × 110	145 × 115	160 × 105

**DGH:** Double mitre with semi-automatic

Models	Operating mode	Mitre range	Saw band speed	Saw blade dimensions	Remaining piece length	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		°	m/min	mm	mm	kg			
320.258 DGH	semi-automatic	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78904	<del>11,880.00</del>	8,880.00
340.278 DGH	semi-automatic	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78906	<del>13,536.00</del>	10,160.00
375.308 DGH	semi-automatic	-45° to 60°	20-120	3,380 × 27 × 0.9	20	400	78913	<del>15,888.00</del>	11,360.00

## Swivel bending machine SBM 1270 × 2.0 mm HS(S) 2.0



DISCOUNT UP TO  
**-29%**

METALWORKING

### Modern bending technology - optimised handling

- > Working or bending length max. 1,270 mm
- > Sheet thickness up to 2 mm
- > Large bending angle 0-135°
- > Bending beam segments made of high-alloy, ground special steel
- > HS models: Upper beam segments can be removed and repositioned, bending and lower beam monobloc
- > HSS models: Upper and bending beam segments can be removed and moved, lower beam monobloc
- > Segment widths 25/30/35/40/45/50/75/100/150/200/(250)/270 mm
- > Opening width between upper and lower cheek max. 48 mm
- > Precise upper and bending beam adjustment for rapid adaptation to different material thicknesses
- > Eccentric technology for effortless bending beam actuation
- > Powerful cylinder for energy-saving work
- > Robust, very durable construction



Models	Sheet thickness max.	Working length max.	Upper beam segments	Bending beam segments	Lower cheek segments	Opening max.	Bending angle	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	mm									
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	1	1	48	0-135	320	81107	2,664.00	1,760.00
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	12	1	48	0-135	335	81108	3,276.00	1,940.00

## Electro-hydraulic workshop presses WPMEH series



- > Electro-hydraulic drive, two drive speeds
- > Hydraulic cylinder laterally adjustable
- > Switching valve for permanent operating speed
- > Press table with locking bolt and press table chain for convenient height adjustment
- > Additional manual hand pump
- > Incl. overload safety valve and pressure gauge
- > Chrome-plated cylinder piston

Models		WPMEH 60/2-K	WPMEH 100/2-K
Technical data			
Pressing capacity max.	t	60	100
Oil flow rate level 1/2	l/min	2.82/11.84	5.64/17.2
Piston speed level 1/2	mm/s	8.69/2.07	7.54/2.47
Return speed	mm/s	10.79	9.06
Engine power	kW	1.5	2.2
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	540	970
Order data			
Order number		81811	81816
Instead of RRP excl. VAT		8,778.00	11,268.00
RRP excl. VAT		6,710.00	8,900.00



WPMEH 100/2-K

**VERY QUIET  
AND LOW-DUST**




**Stone band saws**

**STBS-500** | [elmag.eu/64650](http://elmag.eu/64650)

**STBS-650** | [elmag.eu/64651](http://elmag.eu/64651)

The STBS series stone band saws are specially designed for use on construction sites. In dry cutting, they are suitable for precise processing of materials like aerated concrete, bricks, lightweight clay, expanded clay and wood, but also for insulating panels, such as polystyrene and Styrodur.

- > Dust extraction connector available
- > Simple and optimal adjustment of saw band tension using a hand-wheel
- > Including forklift pockets and lifting eye



**Set includes cross-cut and mitre stop**



**Saw band guide**

Models	Cutting performance			Saw band dimensions mm	Electric motor			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Höhe	Länge	Winkel		Rated performance	Voltage/frequency	Wt.			
	mm	mm	°		kW	V/Hz	kg			
STBS-500	500	660	0-45	3,850 × 27	1.85	230/50	203	<b>64650</b>	<del>3,720.00</del>	<b>3,540.00</b>
STBS-650	650	660	0-45	4,120 × 34	1.85	230/50	207	<b>64651</b>	<del>3,920.00</del>	<b>3,920.00</b>

**Brick cutting machines**

**ZSM-L 890/700 - SET** | [elmag.eu/61375](http://elmag.eu/61375)

**ZSM-XL 890/700 - SET** | [elmag.eu/61376](http://elmag.eu/61376)

Robust design with direct drive for the construction sector. Suitable for cutting bricks, Poroton, marble and general building site material. Cutting depth easy to adjust via quick lock.

- > Incl. wheel set, transport hook and water pump
- > High-mounted cutting table for optimum control
- > Easily manoeuvrable slide on steel rollers with precision ball bearings
- > Incl. diamond cutting disc Ø 700 mm for universal use



**ZS-XL 890/700 - SET**

Models	Cutting performance		Diamond cutting disc		Electric motor			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Tiefe	Länge	mm	mm	Rated performance	Voltage/fre- quency	Wt.			
	mm	mm	mm	mm	kW	V/Hz	kg			
ZSM-L 890/700 - SET	250	400	700	30	4	400/50	135	<b>61375</b>	<del>3,220.00</del>	<b>2,935.00</b>
ZS-XL 890/700 - SET	250	520	700	30	4	400/50	140	<b>61376</b>	<del>3,535.00</del>	<b>3,225.00</b>

## High-frequency bottle vibrator HFFR series

The high-frequency bottle vibrators with integrated frequency inverters impress with their compact design, forming a single unit. Consisting of vibrators, protective conduit, switch housing and connection cable with Schuko plug. The very high compaction performance guarantees high reliability.



Models	Bottle Ø	Hose length	Head length	Compression performance	Frequency	Volume	Weight	Order number	RRP excl. VAT
	mm	m	mm	m³/h	Hz	dB(A)	kg		
HFFR 38/5	38	5	404	20	12,000	70	14.5	64670	995.00
HFFR 50/5	50	5	468	40	12,000	76	20	64671	995.00
HFFR 59/5	59	5	499	45	12,000	79	22.8	64672	995.00

## Vibratory plates PCB series

The PC series vibratory plates are designed for all types of soil cultivation. This series of machines is used by every garden and landscape designer and on every construction site.

- > Perfect compressors for a wide range of applications
- > High compaction combined with easy operation, GX160 Honda petrol engine
- > Suitable for compacting granular and mixed materials, as well as hot/cold asphalt or concrete blocks
- > Incl. wheel set



DISCOUNT UP TO  
**-17%**

Models	Centrifugal force	Max. speed	Area compaction	Performance	Plate size	Vibration frequency	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kN	m/min	m²/h	PS	mm	Hz	kg			
PCB11-35 light-HONDA	11	25	525	5	350 × 380	100	49	63009	1,200.00	995.00
PCB12-35-HONDA	12	26	546	5	350 × 550	93	75	63008	1,290.00	1,120.00
PCB14-40-HONDA	14	26	625	5	400 × 550	93	80	63002	1,340.00	1,175.00
PCB16-50-HONDA	16	26	780	5	500 × 500	93	89	63005	1,440.00	1,245.00
PCB20-50-HONDA	20	24	720	5	500 × 634	93	97	63006	1,510.00	1,325.00

## Stone cutting machines

**SUPREME 120S - SET** | [elmag.eu/61122](http://elmag.eu/61122)

**SUPREME 150S - SET** | [elmag.eu/61123](http://elmag.eu/61123)

Precision bridge saw for professional use. Construction site machine for granite and marble slabs, bricks, natural stone, concrete blocks, ceramics, tiles and porcelain stoneware.

- > Incl. Universal-DiaProfi UNI - diamond disc Ø 300 mm
- > Extensive range of accessories available on request  
Additional table, mounting clamps, front handle, handle by the engine (for immersion), longitudinal stop, engine 2.2 kW (400 volt)
- > Incl. wheel set and laser cutting display



DISCOUNT UP TO  
**-13%**

Models	Cutting performance		Diamond cutting disc		Electric motor			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Tiefe	Länge	mm	mm	Rated performance	Voltage/frequency	Wt.			
	mm	mm	mm	mm	kW	V/Hz	kg			
SUPREME 120 S-SET	85	1,200	300	25.4	2.2	230/50	86	61122	2,545.00	2,225.00
SUPREME 150 S-SET	85	1,500	300	25.4	2.2	230/50	92	61123	2,690.00	2,370.00



INSTEAD OF PRICE EXCL. VAT  
~~239.-~~  
**DISCOUNT -17%**  
**199.-**



## Plastic repair system

**HOT DOC** | [elmag.eu/59222](http://elmag.eu/59222)

- > When fully charged, the wireless device can attach up to 300 staples.
- > Input: DC 5 V 2 A / Output: Max. 3.7 V 8 A
- > Max. 600°C heating temperature, battery: 3.7 V 4000 mAh Li-ion
- > Adjustable head for angle changes, overheating and overvoltage protection
- > SET consisting of: 5 V 2 A adapter, 1M Type-C USB cable, a total of 300x stainless steel staples (0.6 mm end corrugated, 0.8 mm end corrugated, 0.6 mm for outside corners, 0.8 mm for inside corners, 0.6 mm double corrugation & 0.8 mm double corrugation)



## Automatic battery chargers

**MULTICHARGER series**

**DISCOUNT UP TO -12%**

- > Automatic battery chargers for all lead-acid, MF, AGM & GEL batteries, from type 14225 also for calcium batteries (Ca/Ca)
- > Type 14120 normal charge: 6 V 1.2-14 Ah and 12 V 1.2-90 Ah, Trickle charge 1.2-120 Ah
- > Type 14225 normal charge: 12 V 14-150 Ah, trickle charge: 14-225 Ah
- > Type 20300 normal charge: 12 V 20-200 Ah, trickle charge: 20-300 Ah
- > Regeneration, summer, winter, AGM mode
- > **Trickle charge, reverse polarity, short-circuit & overvoltage protection**
- > **Multicharger type 14120 also available in a pack of 9 incl. cardboard stand!**

Type 14120, 6 & 12 V  
[elmag.eu/56030](http://elmag.eu/56030)

INSTEAD OF PRICE EXCL. VAT  
~~77.-~~  
**69.90**

Type 14225, 12 V  
[elmag.eu/56032](http://elmag.eu/56032)

INSTEAD OF PRICE EXCL. VAT  
~~136.-~~  
**DISCOUNT -12%**  
**119.90**

Type 20300, 12 V  
[elmag.eu/56034](http://elmag.eu/56034)

INSTEAD OF PRICE EXCL. VAT  
~~163.-~~  
**DISCOUNT -11%**  
**145.-**



## Energy station / starter 12V

**AIR BAT 2** | [elmag.eu/55089](http://elmag.eu/55089)

- > Ultra-compact energy station / starter - 4 in 1: Power bank, jump start unit, electric air pump & LED lighting
- > Starting function for occasional jump-starting of motorcycles, cars, motorhomes or boat engines
- > Max. start: 3,000 A / I-Start: 1,750 A
- > Electronic air pump for 10-150 PSI (~ 0.7-10.3 bar)
- > LiFePo4 Battery 88.8 Wh
- > Scope of delivery: Jump start cable set incl. pole terminals (+/-), USB-A to USB-C charging cable, USB-C to USB-C charging cable, air hose with lever valve plug incl. various valve attachments

INSTEAD OF PRICE EXCL. VAT  
~~259.-~~  
**DISCOUNT -12%**  
**229.-**



## Hand pallet truck

### HW series

Our ELMAG hand pallet trucks ensure safe and comfortable transportation of your loads.

- > Significantly reduced noise level when driving due to **rubber wheels and polyurethane tandem rollers**
- > Precise and easy retraction into pallets by means of **robust mounting block** at the fork tip
- > Easy to switch between functions (lifting, lowering, driving) with the **practical single-handed lever**

DISCOUNT UP TO  
**-21%**



Insulating, ergonomic handle



Robust stop block at the fork tip



Marking on forks for optimum positioning of the lift truck when laterally lifting a pallet



Models	Load capacity	Fork width A1	Fork length B	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
HW 2500	2,500 kg	540 mm	1,150 mm	80 mm	200 mm	65 kg	33300	419.00	349.00
HWK 2500	2,500 kg	540 mm	800 mm	80 mm	200 mm	62 kg	33301	419.00	349.00
HWL 2500	2,000 kg	540 mm	1,800 mm	80 mm	200 mm	90 kg	33302	629.00	499.00
HWN 1000	1,000 kg	540 mm	800 mm	35 mm	95 mm	52 kg	33303	892.00	749.00

## Electric hand pallet truck

### EHW 1500 | [elmag.eu/33310](http://elmag.eu/33310)

Our electric hand pallet truck EHW 1500 is a true all-rounder with a load capacity of 1500 kg. Its low weight and the fast charging time of our Li-ion batteries allow you to use it quickly and effortlessly. It handles the transport of pallets, materials and goods with ease and helps to optimise your material flow.

- > Precise digital LCD display for the battery charge level
- > Excellent manoeuvrability thanks to lateral support rollers for optimum cornering
- > Enjoy up to 8 hours of battery life
- > Charger included for convenient recharging
- > The 24 V/20 Ah Li-ion battery weighs just 4.4 kg
- > Effortless battery change in just one movement

DISCOUNT  
**-11%**



Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
EHW 1500	1,500	540	1,150	80	195	123	33310	2,365.00	2,099.00

## Lifting table cart

### 500 kg | [elmag.eu/33470](http://elmag.eu/33470)

The mobile ELMAG lifting table cart makes it easier to transport and lift heavy loads to ergonomic working heights. With its robust construction and smooth-running casters, it ensures maximum flexibility for your daily work. Perfect for warehouses, workshops and production!

- > Hands-free operation by lifting with foot pedal
- > Hand lever release for easy, controlled lowering
- > 4 heavy-duty casters, 2 with foot-operated brakes



Model	Load capacity	Table dimensions	Minimum height	Max. height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	kg			
Lifting table cart 500 kg	500	820 x 520	270	795	69.5	33470	466.00	419.00



## Chain hoists HKZ series

DISCOUNT UP TO  
**-20%**

Simple, robust and high-quality combined in one – the chain hoists from ELMAG! Simply lift and lower heavy loads using a chain hoist at a low price!

No need to worry about power sources when you can use your ELMAG chain hoist wherever it is needed, whether in the workshop or on the assembly line.

- > Housing made of high-strength steel
- > Larger diameter of the friction disk ensures a reliable brake
- > Maintenance-free bearings with increased corrosion resistance
- > Hooks made of heat-treated, galvanised steel

Models	Load capacity	Chain dimension	Number of chain strands	Lifting height	Required lifting force	Dimensions (l × b × h)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m								
HKZ 1000	1,000	6 × 18	1	2.5	270	148 × 138.5 × 345	10.2	33360	111.00	89.00
HKZ 2000	2,000	8 × 24	1	3	460	175 × 161 × 410	16.5	33361	157.00	124.90
HKZ 3000	3,000	7.1 × 21	2	3	311	232 × 161 × 478	21.4	33362	209.00	174.90
HKZ 5000	5,000	10 × 30	2	3	462	258 × 180 × 605	37.4	33363	314.00	259.00



## Manual lever hoists HHZ series

DISCOUNT UP TO  
**-22%**

ELMAG manual lever hoists promise high efficiency at low cost! Quick lifting and lowering by simply switching the handle. The compact yet strong lever is suitable for operation in confined spaces.

- > Housing made of high-strength steel
- > The standard handwheel is made of cast steel for high strength and reliable operation.
- > No pre-tensioning required.
- > Protective sleeve made of special elastomer, extremely resistant to heat and cold.
- > Hooks made of heat-treated, galvanised steel

Models	Load capacity	Chain dimension	Number of chain strands	Lifting height	Required lifting force	Dimensions (l × b × h)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m								
HHZ 750	750	6 × 18	1	1.5	147	160 × 133 × 320	6.8	33370	121.00	94.90
HHZ 1500	1,500	8 × 24	1	1.5	295	182 × 157 × 380	10.6	33371	157.00	124.90
HHZ 3000	3,000	10 × 30	1	1.5	304	207.5 × 210 × 490	19.5	33372	247.00	199.00



Transport rollers 6,000 kg

Transport roller set 12,000 kg

## Transport rollers (set)

DISCOUNT UP TO  
**-31%**

Simply set heavy machines/objects in motion with ELMAG transport rollers.

- > Large diameter sealed nylon rollers provide easy movement and distribute the load to protect floors from damage.
- > A non-slip rubber mat ensures stability and protection of the machines to be moved.
- > Carry handle for easy transportation.
- > The transport roller set consists of 2 transport rollers & steel bars.
- > The adjustment range is from 500 to 1,400 mm or from 720 to 1,500 mm.

Models	Load-bearing capacity	Rollers	Roller dimensions	Adjustment range	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	No.	mm	mm				
Transport rollers 3,000 kg	3,000	4	85 × 85	-	9.5	33330	115.00	99.00
Transport rollers 6,000 kg	6,000	6	85 × 85	-	12	33331	149.00	125.00
Transport roller SET 6,000 kg	6,000	8	-	500-1,400	30	33335	245.00	169.00
Transport roller SET 12,000 kg	12,000	12	-	720-1,500	38	33336	345.00	279.00

## Trolley jacks EURO JACK & PROFI JACK

Our versatile and indispensable trolley jacks are a must for every automotive workshop. With their robust construction and smooth-running rollers, they make it easy to lift vehicles. The included lifting rod ensures easy and efficient handling.

DISCOUNT UP TO  
**-16%**



Models		EURO JACK 2000	PROFI JACK 2500	PROFI JACK 3000
Technical data				
Load capacity	kg	2,000	2,500	3,000
Ground clearance	mm	130	80	95
Max. height	mm	330	500	552
Dimensions l x w x h	mm	440 x 195 x 140	1,832 x 340 x 150	790 x 355 x 180
Weight	kg	8.3	32	44
Order data				
Order number		<b>33610</b>	<b>33600</b>	<b>33615</b>
Instead of RRP excl. VAT		69.00	255.00	265.00
RRP excl. VAT		<b>58.00</b>	<b>229.00</b>	<b>249.00</b>

## Trolley jacks ALU EURO JACK 1500 | [elmag.eu/33620](http://elmag.eu/33620)


Our trolley jacks for special requirements. The ALU EURO JACK 1500 is an excellent helper in the workshop: sturdily built yet lightweight. Not only is it durable, but with its minimal lifting height of 75 mm, it is also suitable for lowered vehicles.

- > Sturdy and lightweight aluminium construction
- > Minimum lifting height of 75 mm



Model		ALU EURO JACK 1500
Technical data		
Load capacity	kg	1,500
Ground clearance	mm	80
Max. height	mm	355
Dimensions l x w x h	mm	550 x 240 x 130
Weight	kg	14.5
Order data		
Order number		<b>33620</b>
Instead of RRP excl. VAT		179.00
RRP excl. VAT		<b>169.00</b>

**PTO power generators – for home and field operation**  
**SEZN-IT/TN series**



Product video  
[youtu.be/JEZswNbtOF8](https://youtu.be/JEZswNbtOF8)

The PTO power generators from the SEZN IT/TN series generate quality electricity using a tractor's power take-off shaft – an ideal power supply solution for agriculture and forestry, gardening, construction and municipal operations for external operation of electric machines, water and lifting pumps, engines of construction machines, conveyor belts, hay blowers, etc.

In the event of a power failure, the SEZN models also serve as emergency power generators for house and yard, cold rooms, milk cooling, milking, breeding, feeding and heating systems, etc.

The extremely robust implements, protected all around by a tubular frame, can be mounted on the tractor using a three-point hitch. The base frame has integrated supports for pallet trucks and forklifts/front loaders for easy transportation.


### TOP highlights

- > Mode selector switch for house and field operation
- > Voltage and power (ampere) display for all 3 phases using a multifunction display module
- > Adjustable frequency, voltage and unbalanced load monitoring (asymmetry)
- > Insulation monitoring 2-stage for field operation – no earth spike required
- > Including AVR control for electronic consumers (e.g. milking robot, feeding systems, etc.)



### TOP Ergonomics

- > Comprehensive display and safety functions
  - Traffic light displays for the simplest setting and monitoring
    - red - yellow - green: for frequency monitoring
    - red - green: for voltage monitoring and unbalanced load monitoring
- > The displays for the basic settings are ideally visible from the tractor seat
- > Sockets (field operation): 2x Schuko 230 V, 1x CEE 16 A 400 V, 1x CEE 32 A 400 V
- > 1h socket (in-house operation): 1x CEE 63 A 400 V (up to SEZN 50), 1x CEE 125 A 400 V (from SEZN 80)

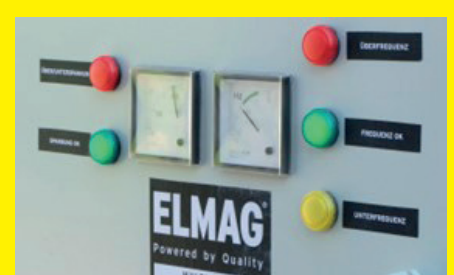



Voltmeter with status LEDs, ideally visible from the tractor seat

Frequency display with status LEDs, ideally visible from the tractor seat

Multifunctional display  
- Voltage for all 3 phases  
- Load for all 3 phases

2-stage insulation monitor

Mode switch  
home/field use

PTO shaft protection  
Transmission gearing  
PTO connection

Three-point hitch

Robust tubular frame  
with forklift pockets, pallet trucks, etc.

Socket outlets for field use

Power outlet for home use

Brushless synchronous generator  
IP44 - 1500 RPM  
Slow runner with AVR control

DISCOUNT UP TO  
**-38%**

Models	400 volt		Tractor	PTO shaft	Generator	Voltage control	Protection type	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase kVA max.	kVA cont.	min PS	Speed rpm	Speed rpm						
SEZN 20WD-AVR-IT/TN	21.8	19.8	50	430	1,500	AVR	IP44	205	53780	6,990.00	5,000.00
SEZN 30WD-AVR-IT/TN	29.7	27.0	70	430	1,500	AVR	IP44	245	53781	7,390.00	5,120.00
SEZN 35WD-AVR-IT/TN	35.6	32.4	85	430	1,500	AVR	IP44	263	53782	7,490.00	5,230.00
SEZN 45WD-AVR-IT/TN	44.5	40.5	100	430	1,500	AVR	IP44	280	53783	7,590.00	5,450.00
SEZN 50WD-AVR-IT/TN	49.5	45.0	115	430	1,500	AVR	IP44	315	53784	8,650.00	5,780.00
SEZN 80WD-AVR-IT/TN	79.2	72.0	180	400	1,500	AVR	IP44	380	53786	10,550.00	6,560.00
SEZN 90WD-AVR-IT/TN	92.1	83.7	210	400	1,500	AVR	IP44	400	53787	10,950.00	7,890.00

Equipment	Connections for field use			Household use		Shutdown					Voltage monitoring	Frequency monitoring	Unbalanced load monitoring	Multifunctional display	Voltage display (3-phase)	Load display (3-ph)	LED status displays	Three-point suspension	PTO shaft protection
	230 V		400 V		400V /1h		Emergency stop	Overload	Short-circuit THM-SS	Insulation monitor									
	Schuko 16A	CEE 16A-5p	CEE 32A-5p	CEE 63A-5p	CEE 125A-5p														
SEZN 20WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 30WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 35WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 45WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 50WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 80WD-AVR-IT/TN	2	1	1	-	1	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	
SEZN 90WD-AVR-IT/TN	2	1	1	-	1	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	



STAGE V

DISCOUNT UP TO -30%

**Diesel generator – emergency power for your detached house**  
**SED 7000WD(E)-AVR series**

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity.

HATZ four-stroke diesel engine fulfils the EU Stage V emissions standard.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal circuit breaker with switch-off in case of overload
- > WD: Manual start with pull-wire starter  
WDE: Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version



**Diesel power**

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices

Models	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled					Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT		
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.					Run.	Wt.
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A						kW	l	l/h 75%Load	h 75%Load		
SED 7000WD-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	95	83	53210	<del>4,130.00</del>	3,120.00
SED 7000WDE-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	110	83	53211	<del>5,310.00</del>	3,740.00



STAGE V

DISCOUNT -34%

**Diesel generator – emergency power for your detached house**  
**SED 13500WDE-AVR**

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity. Many possible applications thanks to the interchangeable tank system, incl. multifunction display

Incl. powerful KOHLER/LOMBARDINI 25LD 425 diesel engine.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version



**Diesel power**

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices

Model	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled					Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT		
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.					Run.	Wt.
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A						kW	l	l/h 75%Load	h 75%Load		
SED 13500WDE-AVR	13.5	12.7	18	5	4.6	20	Kohler/Lomb. 25LD 425	-	13	20	3	6.7	167	85	53236	<del>6,490.00</del>	4,300.00

## Inverter generator

**SEBSS 2000Wi** | [elmag.eu/53045](http://elmag.eu/53045)

**YAMAHA STAGE V**

Camping, boat and sailing tours, assembly, service and rescue operations, power supply for mobile homes, market stalls and mountain huts – the compact SEBSS inverters are flexible “all-rounders” for independent energy supply.

### Extra quiet – thanks to the YAMAHA petrol engine

The sound-insulating plastic housing and the standard ECO automatic function ensure an extremely low noise level and make the devices the ideal companion in noise-sensitive environments.

- > Efficient air cooling, extra quiet – max. 58–68 dB(A)
- > Easy handling – recoil start with YAMAHA EasyStart
- > LED status display, protection class IP23
- > Automatic switch-off in case of oil shortage, overload and short-circuit protection
- > ECO automatic, parallel operation possible
- > Very light – only 21.5 kg



DISCOUNT  
**-27%**

CURRENT

TESTURTEIL  
**Haus & Garten Test**  
**sehr gut**  
**(1,4)**  
Elmag  
SEBSS 2000Wi  
Im Test: 7 Stromerzeuger. Einstieg bis 2,5 kW  
(3 sehr gut, 4 gut)  
Ausgabe 6/2024

Particularly light and quiet

Model	230 volt			12 volt	5 volt	Gasoline engine - 50 Hz - Stage 5							Order number	Instead of RRP excl. VAT	RRP excl. VAT
	1-phase			DC	USB	Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.			
	kVA max.	kVA cont.	A	A	A	YAMAHA	kW	ccm	l	l/h 75%Load	h 75%Load				
SEBSS 2000Wi	2.1	1.8	8	8.3	2	MZ80	1.8	79	1	4	1	4	<b>53045</b>	830.00	<b>610.00</b>

## Petrol generator


**SEB 3300W** | [elmag.eu/53102](http://elmag.eu/53102)

**STAGE V HONDA**

Petrol-powered high-speed engines with synchronous generators are the right choice when it comes to short-term supply of any power consumer and power tool. These include lighting systems, boilers, fan heaters, hot plates, power drills, circular saws and chain saws, lawn mowers, water pumps, etc.

A sturdy tubular frame protects the devices during service, customer service and installation work, as well as when supplying power on construction sites, in municipal operations or in agriculture.

- > Original HONDA four-stroke gasoline engine, air-cooled
- > Synchronous generator with condenser control; manual start with EasyStart system
- > Thermal circuit breaker with switch-off in case of overload
- > Automatic switch-off in the event of low oil

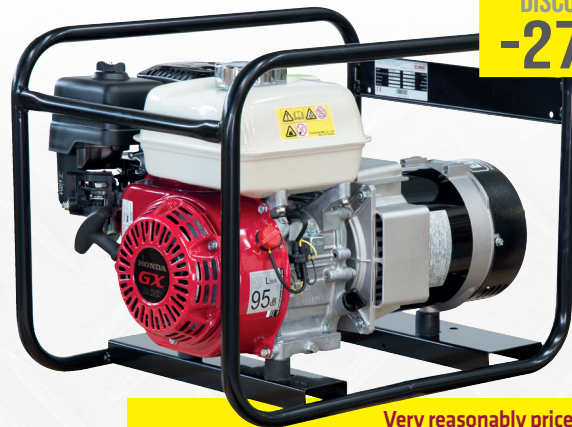

DISCOUNT  
**-27%**

Very reasonably priced quality

Model	230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5									Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.							
	kVA max.	kVA cont.	A		kW	ccm	l	l/h 75%Load	h 75%Load								
SEB 3300 W	3	2.7	12	Honda GX 200	3.8	196	1	3.1	1.3	2.4	42	70	<b>53102</b>	710.00	<b>520.00</b>		

## Petrol generator – ideal for emergency power, also for heat pumps

**SEB 16000WDE-AVR** | [elmag.eu/53199](http://elmag.eu/53199)

**HONDA STAGE V**

Excellent, frequently used high-performance device with 20 l interchangeable tank and fuel-saving ECO automatic idle control. Ideal for use on construction sites, but also as an emergency power supply for buildings with high power requirements (e.g. heat pumps).

- > Socket: 1x 230 V, 1x 400 V, electric start, 75 dB(A) on 7 m
- > Incl. operating hours counter, automatic idling & thermal magnetic circuit breaker
- > Incl. electric start system and maintenance-free battery

### TOP highlights

- > Ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices!
- > 20 litre tank, 5 l/h consumption (at 75% load) – interchangeable tank system
- > Original HONDA GX 690 petrol engine, air-cooled – stage V



DISCOUNT  
**-23%**

Suitable for heat pumps

Model	400 volt			230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm	l	l/h 75%Load	h 75%Load						
SEB 16000WDE-AVR	16	14.4	21	5.8	5.3	23	GX 690	15	688	2	20	5	4	154	75	<b>53199</b>	4,100.00	<b>3,150.00</b>

**Petrol generator – emergency power for your detached house**

**SEB 7500WD-AVR** | [elmag.eu/53196](http://elmag.eu/53196)

400/230 volt frame device for commercial use in construction, for service work and agriculture, as well as for private emergency power supply.

With AVR control for sensitive consumers and high unbalanced load capacity thanks to oversized generator.

**Tip: Increased unbalanced load capacity – ideal for emergency power**

- > Automatic switch-off in the event of low oil
- > Manual launch - Stage V
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Socket: 1x 230 V, 1x 400 V, 72 dB(A) at 7 m

**TOP highlights**

- > Original HONDA GX390 four-stroke gasoline engine, air-cooled
- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices!

**STAGE V**  
**HONDA**

DISCOUNT  
**-25%**



**Our top seller!**

Model	400 volt			230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5								Wt.	Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.						
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm	l	l/h 75%Load	h 75%Load	kg						
SEB 7500WD-AVR	8	7.2	10	3.8	3.4	14.4	GX 390	8.2	389	1	6.1	2.8	2.2	91	72	<b>53196</b>	1,980.00	<b>1,490.00</b>	

**ELMAG**  
Powered by Quality

**WHO IS ELMAG?**

- > Family business with 65 employees from Ried im Innkreis, Upper Austria
- > High-quality machines for compressed air, welding, metalworking, workshop technology and power generation
- > Available from specialised dealers for tools, machines and electrical engineering
- > Service: Professionally trained service team, on-site service for large machines
- > For 40 years: unique, trusting and appreciative corporate culture

**QUALITY FROM AUSTRIA** =

**Quality: No compromises**

High-quality, robust devices with well-known and tried-and-tested engines and generators that you can rely on in an emergency.

**Service that convinces**

We emphasise simple operation and maintenance. Our service team will provide you with fast and competent support, including on site for large machines or commissioning.

**Safety and reliability**

All ELMAG products fulfil the latest safety requirements. You receive a 2-year warranty, 3 years upon registration and at least 15 years spare parts supply

**START UP SERVICE**

**2 JAHRE GARANTIE**

**3 JAHRE GARANTIE**  
ONLINE REGISTRIERUNG  
[elmag.at/3jahre](http://elmag.at/3jahre)

**15 JAHRE ERSATZTEIL GARANTIE**