

Highlights

valid until
Feb 2026

Compressor

WERKER 365/10/50 W

elmag.eu/10099

- > 2-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 365 l/min, delivery capacity 135 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230 volt engine, 3 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



Model	Effective delivery rate	Suction capacity	Operating pressure max.	Oil-lubricated	Container volume	Sound pressure level (4 m)	Weight
	l/min	l/min	bar		l	dB(A)	kg
WERKER 365/10/50 W	135	365	10	●	50	78	47

instead of price excl. VAT
359.-

discount
-22%

279.-



Electric heaters

EUROHEAT series

discount up to
-23%

Electrically operated heater without exhaust gases, making it ideal for enclosed spaces, such as homes, restaurants, workshops, etc.

- > 2 or 3 power levels
- > Simple temperature control, infinitely variable
- > Overheating protection
- > High-quality, durable stainless steel tube elements
- > Automatic overrun ensures long service life of the heating rods (do not disconnect the electric heater after use)



WE 2000



WE 3000

Models		WE 2000	WE 3000	DE 5000	DE 9000	DE 15000
Technical data						
Performance	kW	2	3	5	9	15
Air output	m³/h	250	280	320	708	1,292
Connector plug	-	Schuko	Schuko	CEE 16 A	CEE 16 A	CEE 32 A
Mains voltage	V	230 / ~1	230 / ~1	400 / ~3	400 / ~3	400 / ~3
Weight	kg	5.0	5.0	5.8	9.5	14.6
Order data						
Order number		33205	33200	33201	33202	33203
Instead of RRP excl. VAT		39.00	104.00	176.00	235.00	399.00
RRP excl. VAT		29.99	89.00	139.00	199.00	339.00



instead of price excl. VAT
212.-

discount
-20%

169.-

Compressor

EUROAIR 220/8/24 W | elmag.eu/10006

- > High-quality DIY compressor
- > 1-cylinder unit, lubricated, 2,850 rpm
- > Boiler capacity 24 litres, 8 bar
- > Suction capacity 222 l/min, delivery capacity 122 l/min (at 6 bar)
- > 230 volt engine, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling



instead of price excl. VAT
279.-

discount
-22%

219.-

Compressor

WERKER 275/10/50 W | elmag.eu/10014

- > 1-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 275 l/min, delivery capacity 115 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230 volt engine, 2.5 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



instead of price excl. VAT
225.-

discount
-25%

169.-

Whisper compressor

WHISPER 110/8/8 W | elmag.eu/21217

- > Very quiet – 56 dB(A)
- > High-quality DIY compressor
- > Oil-free 2-cylinder unit with low speed of 1,400 rpm
- > Portable, light and easy to handle (17 kg)
- > Container volume 8 litres, 8 bar
- > Suction capacity 110 l/min, delivery capacity 55 l/min
- > 230 volt engine, 0.75 HP output
- > Incl. pressure switch, pressure regulator as standard, with pressure gauge and 2 quick-release couplings



instead of price excl. VAT
269.-

discount
-22%

209.-

Compressor

BOY 280/10/16 W | elmag.eu/10016

- > Convenient trolley design
- > 1-cylinder unit, lubricated, 2,850 rpm
- > Boiler capacity 16 litres, 10 bar
- > Suction capacity 280 l/min, delivery capacity 120 l/min (at 8 bar)
- > 230 volt engine, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling

Automatic hose reel

EUROREEL AIR 8/10 | elmag.eu/42292

EUROREEL AIR 10/15 | elmag.eu/42293

- > Robust, impact-resistant design
- > 10 m 8 × 12 or 15 m 10 × 15 mm hybrid polymer hose, max. 15 bar
- > 1.5 m long connection hose
- > Incl. sturdy steel wall bracket
- > Quality connection coupling and plug nipple are fitted as standard

instead of price ~~113.-~~ **-17%** **94.-**
instead of price ~~170.-~~ **-24%** **129.-**



EUROREEL AIR 8/10

Automatic cable reel

EUROREEL ELECTRIC 10/230 | elmag.eu/42298

EUROREEL ELECTRIC 20/230 | elmag.eu/42299

- > Load capacity unrolled: max. 2,000 W
- > 10 m or 20 m cable length, 230 volt, 3 × 1.5 mm²
- > Incl. 1.5 m supply cable
- > Incl. stable wall mounting
- > With Schuko plug and socket outlet as standard

instead of price ~~97.-~~ **-19%** **79.-**
instead of price ~~147.-~~ **-19%** **119.-**



EUROREEL ELECTRIC 20/230

Compressors

EUROAIR series

- > Basic professional class model
- > Boiler capacity 50 litres, 10 bar
- > 230/400 volt engine, 3 HP power
- > Lubricated 2-cylinder units
- > The low speeds of ONLY 1,100 to max. 1,570 RPM ensure high duty cycle, long service life and smooth running.
- > Complete with filter pressure reducer and CONDOR pressure switch, motor protection, ball valve for condensate drainage, 2 Euro couplings

Made
in
Italy



EUROAIR
340/10/50 W

Models	Effective delivery rate	Suction capacity	Operating pressure max.	Oil-lubricated	Container volume	Electric motor		Sound pressure level (4 m)	Speed of compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar			Rated power	Voltage/frequency						
EUROAIR 340/10/50 W	215	330	10	●	50	2.2 kW	3 PS 230/50	76 dB(A)	1,570 rpm	53 kg	10252	735.00	679.00
EUROAIR 340/10/50 D	215	330	10	●	50	2.2 kW	3 PS 400/50	76 dB(A)	1,570 rpm	51 kg	10253	770.00	719.00
EUROAIR 480/10/50 W	315	470	10	●	50	2.2 kW	3 PS 230/50	77 dB(A)	1,100 rpm	53 kg	10254	790.00	739.00
EUROAIR 480/10/50 D	315	470	10	●	50	2.2 kW	3 PS 400/50	77 dB(A)	1,100 rpm	55 kg	10255	860.00	799.00



Compressors MEISTER & MEISTER-Z series

Made
in
Italy

- > High-quality compressors MADE IN ITALY
- > Low speed (1,100 rpm) ensures high duty cycle, long service life and smooth running
- > Indirect drive via V-belt
- > Universal use (for compressed air tools, painting work, hand sandblasting guns, etc.)
- > Ideal for semi-professional use and agriculture
- > 2-cylinder block units with large fan wheel
- > For applications with a high compressed air demand (painting, sandblasting, etc.), a minimum container volume of 90 litres is recommended.
- > **MEISTER-Z models with boilers that are hot-dip galvanised on the inside and outside. This provides increased protection against corrosion and a 15-year guarantee against boiler corrosion (provided normal maintenance instructions are followed).**
- > Complete with filter pressure reducer, Condor pressure switch, 2 Euro quick-release couplings, PVC/solid rubber wheels and swivel castors with brakes!

Models	Effective delivery rate	Suction capacity	Max. operating pressure	Container volume	Oil-lubricated	Electric motor			Sound pressure level (4 m)	Speed of compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar	l		Rated power	Voltage/frequency	PS	dB(A)	rpm	kg			
MEISTER 520/10/50 D	315	480	10	50	●	2.2	3	400/50	77	1,100	57	10230	895.00	825.00
MEISTER 520/10/90 D	315	480	10	90	●	2.2	3	400/50	77	1,100	71	10231	955.00	899.00
MEISTER-Z 480/10/50 W	315	480	10	50	●	2.2	3	230/50	77	1,100	55	10260	935.00	879.00
MEISTER-Z 520/10/50 D	315	480	10	50	●	2.2	3	400/50	77	1,100	57	10261	999.00	945.00

Compressors TIGER series

Made
in
Italy

discount up to
-19%



- > Robust technology for demanding, professional construction site use
- > Solid rubber wheels Ø 260 mm for flexible, safe use
- > High efficiency and operational reliability thanks to V-belt drive
- > Two-cylinder units with high-performance pistons Mod. 600 & 700 2-stage compacting
- > Large-area aftercooler made of die-cast aluminium
- > Sturdy tube frame with extendable handlebar
- > Incl. CONDOR pressure switch, ELMAG filter pressure reducer, hour meter, motor protection switch, 2 air outlets with safety venting couplings as standard!



FREE NOW!

"High-flex" compressed air hose SET 10 m, 8 × 13 mm



Models TIGER	Effective delivery rate	Suction capacity	Max. operating pressure	Oil-lubricated	Container volume	Electric motor			Sound pressure level (4 m)	Speed of compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar		l	Rated power	Voltage/frequency	PS	dB(A)	rpm	kg			
400/10/22 W	260	380	10	●	2 × 11	2.2	3	230/50	74	1,300	59	10071	1,249.00	1,039.00
400/10/22 D	260	380	10	●	2 × 11	2.2	3	400/50	74	1,300	59	10070	1,249.00	1,199.00
600/10/22 D	378	539	10	●	2 × 11	3.0	4	400/50	78	1,400	67	10075	1,565.00	1,499.00
700/10/22 D	439	578	10	●	2 × 11	4.0	5.5	400/50	78	1,400	72	10077	1,775.00	1,739.00

Compressors

MEISTER 710/10/90 D | elmag.eu/10233

MEISTER 710/10/200 D | elmag.eu/10234

- > All-round compressor for versatile professional use, 2-cylinder unit, 2-stage compression
- > Low-speed motor, 1,370 rpm
- > Boiler capacity 90 or 200 litres, 10 bar, 400 volt engine, 5.5 HP
- > Suction capacity 670 l/min, delivery capacity 490 l/min (at 8 bar)
- > Complete with filter pressure reducer, Condor pressure switch, 2 Euro quick-release couplings, PVC/solid rubber wheels and swivel castors with brakes!

Made in Italy

discount
-10%



MEISTER
710/10/200 D

Models	Effective delivery rate l/min	Suction capacity l/min	Operating pressure max. bar	Oil-lubricated	Container volume l	Electric motor		Sound pressure level (4 m) dB(A)	Speed of compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	Voltage/frequency V/Hz						
MEISTER 710/10/90 D	490	670	10	●	90	4.0	5.5	400/50	77	1,370	10233	1,550.00	1,399.00
MEISTER 710/10/200 D	490	670	10	●	200	4.0	5.5	400/50	77	1,370	10234	1,760.00	1,590.00

Compressor

PROFI-LINE 840/10/200 D | elmag.eu/11022

- > High-performance piston compressor for professional use, 2-cylinder unit, 2-stage compression
- > Boiler capacity 200 litres, 10 bar, 400 volt engine, 7.5 HP output
- > Suction capacity 850 l/min, delivery capacity 595 l/min (at 8 bar)
- > Unit speed ONLY 1,150 rpm: Long service life, low noise
- > Complete with filter pressure regulator 1/2", CONDOR pressure switch with operating hours counter, GI wheels, swivel castors with brakes & 2 safety bleed couplings

Made in Italy



FREE NOW!

Automatic condensate drain
AKA 1/2", 230 volt

Functionality:



instead of price excl. VAT
2,753.50
discount
-23%
2,119.-





PROFI-LINE SILENT high-performance compressor PLS 750/10/270 D | elmag.eu/10125

- > Highly effective sound insulation – noise level ONLY 68 dB(A)!!!
- > Complete unit incl. 270-litre compressed air container, max. 10 bar (no TÜV approval required in Austria)
- > 2-cylinder unit, 2-stage compression
- > Centralised condensate drainage from both CA containers
- > Suction capacity 750 l/min, delivery capacity 563 l/min (at 8 bar)
- > 400 volt engine 4 kW, 5.5 HP
- > Extremely low unit speed of ONLY 1,000 rpm
- > Vibration-free due to vibration buffer
- > Included as standard: Operating hours counter, ball valve for compressed air outlet 1/2"
- > Optionally available:
MDX 1200 refrigeration dryer package elmag.eu/00900
(RRP: €1,149.- excl. / €1,367.31 incl. 19% VAT)




FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



elmag.eu/00900

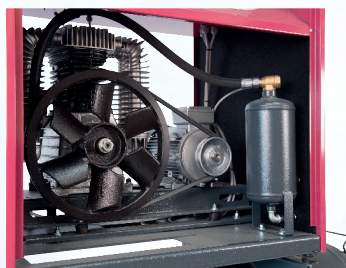

instead of price excl. VAT
4,374.50
discount -15%
3,739.-



Compressor PROFI-LINE 840/10/270 D | elmag.eu/11051

- > High-performance compressors for professional use (10 bar)
- > Robust industrial design ensuring high efficiency
- > Unit speed 1,150 rpm: Long service life, low noise
- > 2-stage compression 2-cylinder unit with cast iron cylinders and large intercoolers and aftercoolers made of die-cast aluminium
- > Unique air cooling system – resulting in less condensation
- > Extremely low air inlet temperature (max. 50–60 °C) thanks to copper cooling pipe running behind fan wheel
- > Stationary with vibration damper (without filter pressure regulator)
- > In a space-saving vertical design
- > **NEW: Operating hours counter & safety vent couplings as standard**

FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



discount -20%

Model	Effective delivery rate	Suction capacity	Operating pressure max.	Oil-lubricated	Container volume	Electric motor			Sound pressure level (4 m)	Air outlet	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar			Rated power	Voltage/ frequency							
							kW	PS						
PLV 840/10/270 D	595	850	10	●	270	5.5	7.5	400/50	76	3/4	185	11051	3,129.50	2,499.00

Automatic industrial reels

INDUSTRIE 530/12, 540/12, 4430/11 & 4430/13

- > Extremely robust and professionally designed hose reels for industrial use, open design
- > 5-year WARRANTY
- > Models 530/12 & 540/12: Frame and drum made of painted sheet steel
Models 4430/11 & 4430/13: Frame made of ABS plastic and drum made of painted sheet steel
- > Extremely strong, durable springs made of special steel guarantee even and complete return
- > Tested for approx. 25,000 full cycles
- > Locking device, stable wall/ceiling mounting, swivel mechanism and 60-cm connecting hose are standard features.
- > Adjustable arm for optimal alignment during wall and ceiling mounting
- > Rubber hose with galvanised connectors
- > Large hose dimensions for models 530/12 & 540/12

Made in Italy

discount up to
-14%

For compressed air & cold water (20 bar)

All industrial reels on this page are explosion-proof
-> according to ATEX 94/9



5 YEARS
REEL GUARANTEE



INDUSTRIE 4430



INDUSTRIE 530 & 540

Models	Hose quality	Hose dimension	Hose length	Inlet connection	Outlet connection	Max. working pressure	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		Ø ID×OD mm	m	Inch	Inch				
INDUSTRIE 530/12	GI	12.7 × 20	25	IG 1/2"	AG 1/2"	20	43005	726.00	699.00
INDUSTRIE 540/12	GI	19 × 26.5	20	IG 1"	AG 3/4"	20	43000	1,100.00	999.00
INDUSTRIE 4430/11	GI	12.7 × 20	15	IG 1/2"	AG 1/2"	20	43131	576.00	495.00
INDUSTRIE 4430/13	GI	9.5 × 16	20	IG 1/2"	AG 3/8"	20	43133	576.00	495.00

INDUSTRIAL hose reel

4432/32 – SET | elmag.eu/43023

for high-pressure cleaners

- > For water (max. 130°C), 200 bar
- > Drum/holder: ABS plastic/stainless steel AISI 304
- > Swivel joint: Stainless steel AISI 304
- > 18 m HP hose: 3/8" (9.5 × 17 mm)
- > With swivelling bracket 40° left/right and 60 cm hose supply cable + 3 m HP connection hose & intermediate adapter to lance as standard for Kärcher/Kränzle
- > Field of application: Workshops, agriculture
- > 5-year WARRANTY

Made in Italy



instead of price excl. VAT
797.50
discount -16%
669.-



Tyre inflation & pressure gauge

FLEXAIR 10/13 | elmag.eu/32119

- > Location-independent thanks to a built-in 13-litre tank
- > Essential for workshops, service stations and petrol stations
- > Includes handle with twin plug
- > Calibrated working pressure quality pressure gauge (Ø 80 mm)
- > Easy operation via a multi-function lever
- > 1.2-m-long filling hose with fitted twin plug and filling nozzle
- > Maximum boiler pressure 10 bar

instead of price excl. VAT
659.-

discount
-25%

495.-



CA impact wrench 1/2"

EPS 99 Composit | elmag.eu/44707

- > Professional impact wrench in a particularly small design, length only 112 mm
- > 4-stage power control
- > Impact-resistant composite housing
- > Loosening/tightening torque 746/650 Nm
- > High-performance double impact mechanism
- > One-hand operation for switching between clockwise and anti-clockwise rotation
- > Weight ONLY 1.3 kg

instead of price excl. VAT
221.-

discount
-37%

139.-



DL chipping hammer set

EPS 201 K | elmag.eu/43816

- > Powerful model, high stroke with low impact rate
- > Includes steel chisel holder, retaining spring and inline oiler
- > Ideal for tiles, plaster, etc.
- > Also for bodywork and metalwork
- > Complete set in a case, including 5 different quality chisels made of chrome molybdenum steel
- > Weight: 2.4 kg

instead of price excl. VAT
146.-

discount
-12%

129.-



DL orbital grinder

EPS 440 | elmag.eu/43850

- > Industrial quality
- > Variable speed control, max. 10,000 rpm
- > Universal use (stroke height 5.0 mm)
- > Ergonomic, non-slip composite handle
- > Safety switch with automatic stop
- > Grinding disc Ø 150 mm with 6 holes
- > Low height, only 85 mm
- > Connection for dust extraction available
- > Weight ONLY 0.8 kg

instead of price excl. VAT
313.-

discount
-22%

244.-

Automatic hose reel

ROLL AIR MAJOR 15 | elmag.eu/42167

- > Modern, functional design
- > Swivelling housing and strong return spring
- > PU hose 10 × 15 mm, 15 m to 15 bar
- > Disengageable blocking device
- > Includes high-quality JWL steel couplings NW 7.8 with swivel joint, anti-kink spring and steel plug nipple

Made
in
Italy

instead of price excl. VAT
~~286.-~~
discount -21%
225.-



COMPRESSED AIR

Automatic cable reel

ROLL ELECTRIC MAJOR PLUS 230 | elmag.eu/42276

- > Closed plastic housing
- > Robust and impact-resistant, TÜV & GS certified
- > Swivelling housing on stable wall/ceiling suspension made of steel
- > Strong return springs made of special steel
- > Disengageable blocking device, thermal overload protection
- > Load capacity unrolled: max. 3,500 W
- > 20 m cable length, 230 volt, 3 × 2.5 mm²
- > Incl. steel coupling & steel nipple JWL, NW 7.8
- > Optional: return brake SLOW MOTION (item no. 42256) enables completely independent winding of the cable.

Made
in
Italy

instead of price excl. VAT
~~444.-~~
discount -15%
379.-



Automatic hose reel

ROLL AIR GENIUS & EXTRA series

- > Closed plastic housing
- > Robust and impact-resistant
- > Swivelling housing on stable wall/ceiling suspension made of steel
- > Strong return springs made of special steel
- > High-quality PU hoses for compressed air up to 15 bar
- > Disengageable blocking device
- > Hose guide rollers for drum inlet
- > Incl. steel coupling & steel nipple JWL, NW 7.8
- > NEW: SLOW MOTION automatic reverse brake installed

Made
in
Italy

discount up to
-22%



ROLL AIR EXTRA



Models	Hose quality	Hose dimension	Hose length	Supply cable	bar max.	Blocking device can be switched off	Dimensions cm				Order number	Instead of RRP excl. VAT	RRP excl. VAT
		Ø I × A mm	m	m			l	b	h	kg			
ROLL AIR GENIUS 15	PU	8 × 12	15	2	15	yes	45	20	36	5.1	42242	264.00	212.00
ROLL AIR GENIUS PLUS 15	PU	10 × 15	15	2	15	yes	45	20	36	5.6	42245	293.00	239.00
ROLL AIR EXTRA 20	PU	10 × 15	20	2	15	yes	53	21	43	8.6	42247	382.00	299.00
ROLL AIR EXTRA 16	PU	13 × 18	16	2	15	yes	53	21	43	9.0	42248	411.00	324.00



Automatic welding screen

MultiSafeVario® L-TC | elmag.eu/56381

- > For all common welding processes, also for TIG > 5 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 520 g
- > Top marks for classification: 1/1/1/1, shutter speed: 0.05 ms
- > Viewing window: 98 × 43 mm
- > Sanding mode, replaceable backup battery
- > Improved headband, ergonomic helmet shell
- > Incl. attachment discs: 3 pcs. outside, 1 pcs. inside
- > Optionally available: Dioptre disc insert

instead of price excl. VAT
~~66.50~~
discount
-38%
41.50



Automatic welding screens

MultiSafeVario® 2XL-TC

- > For all common welding processes, also for TIG > 5 A
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 16321 ELMAG W4 / 9-13 V1 CE
- > Shutter speed: 0.05 ms
- > Large viewing windows: 98 × 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > Improved headband, ergonomic helmet shell
- > Incl. attachment discs: 3 pcs. outside, 1 pcs. inside
- > Optionally available: Dioptre disc insert

instead of price excl. VAT
~~109.-~~
discount
-33%
72.90

2XL-TC art | elmag.eu/59370
2XL-TC eagle | elmag.eu/59371
2XL-TC flame | elmag.eu/59372



Automatic welding screen

MultiSafeVario® PREMIUM-TC | elmag.eu/58380

- > For all common welding processes, also for TIG > 3 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 4-9 & 8-13, internal controls**
- > Adjustable brightening delay 0.3 ~ 0.9 s
- > 4 light sensors, weight: 460 g
- > Top marks for classification 1/1/1/1, shutter speed: 0.033 ms
- > Extra-large viewing window: 100 × 65 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > Improved headband, ergonomic helmet shell
- > Incl. attachment discs: 3 pcs. outside, 1 pcs. inside
- > Optionally available: Dioptre disc insert

instead of price excl. VAT
~~129.-~~
discount
-23%
99.90



Automatic welding screen

Optrel® neo P550 | elmag.eu/57200

- > For all common welding processes, > 28 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 9-13, external and internal controls**
- > Adjustable brightening delay: 0.05 ~ 1.0 s
- > 3 light sensors, weight: 495 g
- > Classification: 1/1/1/2, shutter speed: 0.1 ms
- > Large viewing window: 100 × 50 mm
- > Sleep mode, replaceable backup battery, battery status indicator
- > Optionally available: Dioptre disc insert, industrial helmet adapter, industrial helmet, leather head, neck and chest protection

instead of price excl. VAT
~~272.-~~
discount
-16%
229.-

Exhaust air sets

- > Fast working possible due to particularly flexible adjustment with just one hand
- > 40% less adjustment of the extraction arm needed thanks to the flow-optimised design of the hood.
- > Holds the set position self-supporting through internal support linkage with spring assistance
- > Compact solution for welding stations with direct outdoor discharge
- > Scope of application: Large amounts of smoke/dust, continuous use, welding fumes, gases, vapours, light dusts
- > For wall mounting or on columns

Models	Connection	Suction power with arm	Motor power	Noise level	Pipe Ø	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	Volt	m³/h	watt	dB(A)	mm	kg			
Exhaust air set 2m	400	1,000	750	73	150	40	57526	1,630.00	1,549.00
Exhaust air set 3m	400	1,000	750	73	150	44	57527	1,720.00	1,639.00
Exhaust air set 4m	400	1,000	750	73	150	48	57528	1,805.00	1,715.00



WELDING

Extraction systems, mobile

SMART MASTER series

- > Compact basic device for sporadic smoke extraction, 230 volt
- > Rotating & swivelling extraction hood 360°
- > Three-stage filter (filter area 13 m²)
- > Extraction capacity with arm 950 m³/h
- > Noise level: 72 db(A)

Arm length 2 m
W3/IFA tested
elmag.eu/58600

instead of price excl. VAT
~~1,873.-~~

1,699.-

Arm length 2 m
H13 AT edition
elmag.eu/58650

instead of price excl. VAT
~~1,958.-~~

1,779.-

Product video:



FREE NOW!

10 pre-filter mats



NOTE: ELMAG® offers the SMART-MASTER mobile suction units in two versions!

Selection criteria	Austria	Germany
Sufficient authorisation for standard welding fumes (without carcinogenic substances)	W3/IFA approval	W3/IFA approval
Required authorisation for carcinogenic substances (e.g. welding fumes for stainless steel or brass welding work)	H13 AT Edition (HEPA filter according to GKV 2011, Section 15)	W3/IFA approval

Extraction systems, mobile

PROFI MASTER series

- > Robust quality with powerful filters for regular use in the repair shop or maintenance area, 400 volt
- > Rotating & swivelling extraction hood 360°
- > Two-stage filter (filter area 17 m²)
- > Extraction capacity with arm 1,100 m³/h
- > Noise level: 70 db(A)
- > Optional automatic start-stop available on request

Arm length 3 m
W3/IFA tested
elmag.eu/58603

instead of price excl. VAT
~~3,018.-~~

2,869.-

Arm length 3 m
H13 AT edition
elmag.eu/58653

instead of price excl. VAT
~~2,933.-~~

2,789.-

Product video:



FREE NOW!

10 pre-filter mats

Demonstration unit

Arm length 3 m
H13 AT edition
elmag.eu/V-01315

instead of price excl. VAT
~~2,933.-~~

**discount
-30%**

2,059.-

Available from early December



discount upto
-27%

MIG/MAG gas-shielded arc welding systems

EUROMIG^{plus}

- > Compact design with clear, ergonomically arranged control panel
- > Powerful feed units with 2 roller drive, with 3 m hose package length as standard
- > From model EM 204: Main transformers with copper winding, 2-cycle, 4-cycle, spot & interval welding function, EM 174 only 2-cycle & spot welding function

Models		EM 174	EM 204	EM 254
Material thickness	mm	0.5-6	0.5-8	0.5-10
Welding current setting range	A	35-120 90-165	15-200	25-250
Welding current switching stages	No.	6	10	10
Steel/stainless steel wire diameter	mm	0.6-0.8	0.6-1.0	0.6-1.2
Duty cycle at 40 °C	% / A	100/47 100/47	100/100	100/130
Duty cycle at max. welding current	% / A	10/120 10/165	20/200	20/250
Feed drive	Rollers	2	2	2
Original BINZEL hose package	MB	EVO 15/3m	EVO 15/3m	EVO 25/3m
Mains voltage / fuse protection	V / A	230/16 400/16	400/16	400/16
Order number		54015	54016	54017
Instead of RRP excl. VAT		1,269.50	1,694.60	2,125.10
RRP excl. VAT		979.00	1,369.00	1,549.00

EUROMIG^{plus} 254



FOR FREE!

Wear parts set, welding gloves & welding wire 0.8 or 1.0 mm / 15 kg



MIG/MAG, MMA multifunction welding inverter

CPTX-I 400 2W | elmag.eu/54080

- > Infinitely variable MIG/MAG, MMA/E manual industrial welding unit with 100% duty cycle at 400 amps
- > SYNERGY function for automatic wire feed control when welding current is increased/decreased with different characteristic curves for STEEL & STAINLESS STEEL
- > With detachable feed unit & water-cooled hose package, as well as many features

Model		CPTX-I 400 2W
Material thickness	mm	1.0-30
Welding current setting range MIG/MAG	A	30-400
Welding voltage setting range	V	12-38
Steel/stainless steel wire diameter	mm	0.8-1.2
Aluminium wire diameter	mm	1.0-1.2
Duty cycle at max. welding current MIG/MAG	% / A	100/400
Welding current setting range MMA	A	30-300
Duty cycle at max. welding current MMA	% / A	60/300
Welding wire reel diameter	mm	200/300
Welding wire reel weight	kg	5/15
Feed drive	Rollers	4
Water-cooled	-	●
Mains voltage / fuse protection	V / A	400/32
Weight	kg	120

discount
-16%
5,159.-

FOR FREE! MBC 501W/4m hose package & welding wire 1.2mm / 15 kg

STEEL SET mixed gas 20 litres SG2/G₃Si 1-0.8mm/15 kg | elmag.eu/00285 **359.-**
incl. 19% VAT 427.21

STEEL SET mixed gas 20 litres SG2/G₃Si 1-1.0mm/15 kg | elmag.eu/00286 **359.-**
incl. 19% VAT 427.21

STEEL SET mixed gas 20 litres SG2/G₃Si 1-1.2mm/15 kg | elmag.eu/00287 **359.-**
incl. 19% VAT 427.21

MIG/MAG hose packages, gas-cooled

MBC 15 | MBC 25 | MBC 36

discount upto
-13%

Technical data according to EN 60 974-7:

- > MBC 15 Load: 180 A (150 A) / CO₂, 180 A (150 A) / mixed gas M21, ED: 35% (60%)
- > MBC 25 Load: 230 A / CO₂, 200 A / mixed gas M21, ED: 60%
- > MBC 36 Load: 320 A / CO₂, 290 A / mixed gas M21, ED: 60%

MIG/MAG hose packages	Material	Wire nozzle Ø	Core Ø	Order number	Instead of RRP excl. VAT	RRP excl. VAT
MBC 15/3m	Steel	0.8	0.6-1.0	15710	68.50	59.90
MBC 15/4m	Steel	0.8	0.6-1.0	15713	75.00	69.90
MBC 15/5m	Steel	0.8	0.6-1.0	15715	88.50	79.90
MBC 25/3m	Steel	1.0	0.8-1.2	15730	86.50	78.00
MBC 25/4m	Steel	1.0	0.8-1.2	15733	97.50	88.00
MBC 25/5m	Steel	1.0	0.8-1.2	15735	116.00	105.00
MBC 36/3m	Steel	1.0	0.8-1.2	15740	126.00	115.00
MBC 36/4m	Steel	1.0	0.8-1.2	15743	146.00	129.00
MBC 36/5m	Steel	1.0	0.8-1.2	15745	174.00	155.00



All hose packages with EURO central connection

MIG/MAG, MMA/E manual, TIG welding inverter M3S series

 discount up to
-16%

WELDING

- > Mobile multifunctional welding inverter
- > 3 welding processes in one device, MIG/MAG, MMA/E manual & LIFT-TIG (DC)
- > Synergic operation in MIG/MAG process for steel, stainless steel, aluminium and CuSi materials or manual operation
- > 200/250 or 300/350 amps max. welding current at 60 or 40% duty cycle
- > Three-phase 3~400 V, compliant with Ecodesign directive as energy efficiency > 80%
- > 4-roller drive incl. gear rim connection to pressure rollers made of die-cast aluminium
- > XL housing size for welding wire reels Ø & weight: max. Ø 300 mm / max. 15 kg
- > Incl. 2-cycle, 4-cycle, special 4-cycle & spot-welding function
- > In MIG/MAG mode: Inductance, under FN gas pre-flow time (PrG) & gas post-flow time (PoG), soft start (SfT), burn-back/wire burn-back (bub), up/down remote control (u-d), in special 4-step mode, starting current (SCP) and end crater current (ECP) can also be set
- > In MMA mode: Hot start (Hot) & arc force (Arcf) adjustable
- > JOB function: 10 welding programs can be stored
- > With optional accessories and polarity reversal, gas-shielded flood wire & LIFT-TIG (DC) welding also possible
- > Extensive standard equipment: Hose package MBC 24/4m / 36/4m or MBC 501W/4m, ground cable 3m, electrode holder cable 4m, gas hose 2.5m, pressure regulator with 2 pressure gauges incl. Quick Fit coupling, wire spool adapter for D300 & D200 spools, various feed rollers



Product video:



M3S 2060 T 4XL

FOR FREE! Wear parts set, welder gloves & welding wire 0.8/1.0 or 1.2 mm / 15 kg



Accessories	Order number	RRP excl. VAT
Mixed gas steel cylinder M21C (82 Ar/18% CO ₂), 20 l.	54202	329.00
Mixed gas steel set 20 l, welding rod SG2 (G ₃ Si 1) 0.8 mm / 15 kg	00285	359.00
Mixed gas steel set 20 l, welding rod SG2 (G ₃ Si 1) 1.0 mm / 15 kg	00286	359.00
Mixed gas steel set 20 l, welding rod SG2 (G ₃ Si 1) 1.2 mm / 15 kg	00287	359.00
TIG hose package SRC ONE 26/4m – up/down, 19-piece original equipment set	15850	215.00
TIG hose package SRC ONE 26/8m – up/down, 19-piece original equipment set	15851	279.00
Steel cylinder, argon 4.6, 20 litres	54242	339.00



M3S 2560 T 4XL



M3S 3040 T 4XL

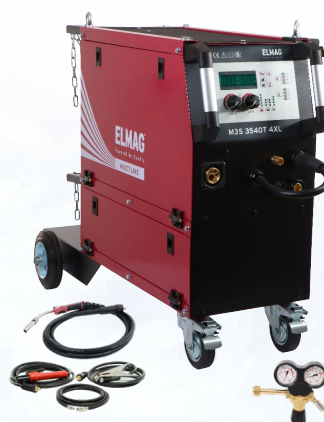

M3S 3540 T 4XL



M3S 3540T 4XL/WI

Models		M3S 2060 T 4XL	M3S 2560 T 4XL	M3S 3040 T 4XL	M3S 3540 T 4XL	M3S 3540T 4XL/WI
Technical data		Gas-cooled	Gas-cooled	Gas-cooled	Gas-cooled	Water-cooled
Material thickness	mm	0.6–8	0.6–10	0.5–12	0.5–14	1.0–14
Welding current setting range (MIG/MAG)	A	25–200	30–250	30–300	50–350	50–350
Welding current setting range (MMA & TIG)	A	10–200	10–250	10–300	10–350	10–350
Steel wire diameter	mm	0.6–1.0	0.6–1.2	0.6–1.2	0.8–1.6	0.8–1.6
Stainless steel wire diameter	mm	0.8–1.0	0.8–1.2	0.8–1.2	1.0–1.6	0.9–1.6
Aluminium wire diameter	mm	1.0–1.2	1.0–1.2	1.0–1.2	1.0–1.6	1.0–1.6
Duty cycle at 40 °C	% / A	100/155	100/193	100/199	100/221	100/221
Duty cycle at max. welding current	% / A	60/200	60/250	40/300	40/350	40/350
Feed drive	Rollers	4	4	4	4	4
Original ELMAG hose package	MBC	24/4m	24/4m	36/4m	36/4m	501W/4m
Efficiency	>	80%	80%	80%	80%	80%
Power consumption in idle mode	W	25	25	25	25	25
Mains voltage / fuse protection	V / A	400/16	400/16	400/16	400/32	400/32
Order data						
Order number		15225	15228	15231	15234	15239
Instead of RRP excl. VAT		1,487.50	1,674.10	1,970.10	2,506.60	3,258.60
RRP excl. VAT		1,249.00	1,419.00	1,659.00	2,099.00	2,729.00



NEW!

FOR FREE! Wear parts set & welding wire 0.8 mm / 5 kg

instead of price excl. VAT 792.-
discount -21%
629.-

MIG/MAG, MMA/E manual, TIG welding inverter

P3S 1825M 2L | elmag.eu/15204

- > 3 welding processes in one device, synergic operation in MAG process
- > Max. 180 amps at 25% duty cycle, infinitely variable 20–180 A
- > Mono-phase 1~230 V, compliant with Ecodesign directive as energy efficiency > 85%
- > 2-roller drive incl. gear rim connection to the pressure roller made of die-cast aluminium
- > Incl. 2-cycle, 4-cycle & spot welding function, in MIG/MAG mode: Inductance, BBT (BurnBackTime) wire burnback and in MMA mode: Hot start & arc force adjustable
- > Gas-shielded cored wire welding also possible with optional accessories and polarity reversal
- > Material thickness: MAG 0.8-5 mm / MMA welding electrodes: Ø 1.6-4.0 mm

Extensive standard equipment:

Hose package MBC 15/3 m, earth cable 25 mm²/3 m, electrode holder welding cable 25 mm²/4 m, gas hose incl. quick fit quick connector DN5 / 2.5 m, pressure regulator with 2 pressure gauges incl. quick fit coupling DN5, feed rollers for 0.6/0.8/0.9/1.0 mm wire

Optionally available:

M21 C mixed gas steel cylinder elmag.eu/54202
(RRP: €329.- excl. VAT)

SRC 26V/4m TIG hose package elmag.eu/15810
(RRP: €156.- excl. VAT)

20-litre argon steel cylinder elmag.eu/54242
(RRP: €339.- excl. VAT)



M21 mixed gas steel cylinder



SD 1635M PFC/MV

NEW!

Now also included in the SET-K!

Large transport case, 20 pcs. rutile welding electrodes each Ø 2.5 × 350 mm & 3.2 × 350 mm



MMA/E manual welding inverter

SD 1635M / 2035M PFC/MV & SET

discount up to
-16%

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, Anti Stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan, JOB function (10 welding programs can be stored in the memory)
- > PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage, when using a power generator or with long supply cables (up to 100m / 3 × 2.5 mm²)
- > Suitable for repair / assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture and metal construction
- > Incl. 4 m electrode holder welding cable 25 mm² / plug Ø 13 mm, 35/50 mm² 3 m earth cable 25 mm² / plug Ø 13 mm, 35/50 mm², carrying strap

Models		SD 1635M PFC/MV		SD 2035M PFC/MV	
Technical data		MMA	TIG	MMA	TIG
Welding current setting range	A	10–160	10–90	10–200	10–110
Weldable electrodes Ø	mm	1.6–4.0	1.0–2.4	1.6–5.0	1.0–3.2
Duty cycle at max. welding current at 40°C	% / A	35/160	35/90	35/200	35/110
100% duty cycle at welding current at 40°C	% / A	100/105	100/60	100/130	100/70
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	230/16	110/16	230/16	110/16
Weight	kg	5.6		5.7	
Order data					
Order number		15010		15015	
Instead of RRP excl. VAT		395.00		436.00	
RRP excl. VAT		375.00		415.00	
Order data SET-K		SD 1635M PFC/MV		SD 2035M PFC/MV	
Order number		15011		15016	
Instead of RRP excl. VAT		509.00		561.00	
RRP excl. VAT		429.00		475.00	

MMA/E manual welding inverter

SD 2560T & SD 4060T CEL

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, anti-stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100m extension cable (5 × 2.5 mm²)
- > Suitable for repair/assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture, metal construction and pipeline construction
Comprehensive standard equipment
 Model SD 2560T: 4m electrode holder welding cable 35 mm² / plug Ø 13 mm, 35/50 mm² 3m earth cable 35 mm² / plug Ø 13 mm, 35/50 mm²
 Model SD 4060T CEL: 4m electrode holder welding cable 50 mm² / plug-Ø 13 mm, 35/50 mm², 3 m ground cable 50 mm² / plug Ø 13mm, 35/50 mm²

Models		SD 2560T		SD 4060T CEL	
Technical data		MMA	TIG	MMA	TIG
Welding current setting range	A	10–250		20–400	
Weldable electrode Ø	mm	1.6–5.0	1.0–3.2	1.6–6.0	1.0–4.0
Duty cycle at max. welding current at 40°C	% / A	60/250		60/400	
100% duty cycle at welding current at 40°C	% / A	100/200		100/325	
Input power I1 max. / I1 eff.	A	20/15.5	16/12.4	35/27	27/21
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	400/16		400/32	
Weight	kg	11.3		23.2	
Order data					
Order number		15020		15030	
Instead of RRP excl. VAT		686.00		1,320.00	
RRP excl. VAT		649.00		1,249.00	



SD 4060T CEL

Optional accessories for SD 1635M PFC/MV - SD 4060T CEL for LIFT-TIG welding	Order number	RRP excl. VAT
TIG tube set SRC 26V/4m, incl. equipment set	15810	156.00
TIG tube set SRC 26V/8m, incl. equipment set	15811	209.00
Gas hose 2.5 m for argon/Co2, quick coupling	15135	21.00
Argon pressure regulator, 0-12 litres/min., incl. coupling	54106	81.00
Steel cylinder Argon 4.6, 20 litres / 200 bar filled	54242	339.00



TIG hose package

TIG DC, MMA/E manual welding inverter

DD 2050M P/PFC/MV ECO-SET-G

DD 2560T P ECO-SET-G





- > DC constant or pulsed welding current (0.5-200 Hz), Hot Start+, Arc Force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > DD 2050M P/PFC/MV: PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage or long supply cables
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100 m of extension cable (3 or 5 × 2.5 mm²)
- > Ideal for steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, etc.
- > TIG hose package SRC 26/4 m – HF incl. UP/DOWN current control on the handle, 4 m electrode holder cable, 3 m earth cable, pressure regulator & 2.5 m gas hose with quick-release couplings, etc.

Models		DD 2050M P/PFC/MV		DD 2560T P	
Technical data		TIG	MMA	TIG	MMA
Welding current setting range	A	5–200		5–250	
Weldable electrodes Ø	mm	1.0–3.2	1.6–5.0	1.0–3.2	1.6–5.0
Duty cycle at max. welding current @ 40°C	% / A	50/200	30/200	60/250	
100% duty cycle at welding current @ 40°C	% / A	100/145	100/135	100/195	
Input power I1 max. / I1 eff.	A	21/14.8	32/17.5	14/11	18/14
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	230/16	230/32	400/16	
Weight	kg	10.2		12.6	
Order data					
Order number		15041		15046	
Instead of RRP excl. VAT		1,090.00		1,225.00	
RRP excl. VAT		849.00		1,059.00	



Now included in the ECO-SET-G!

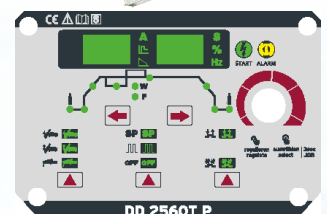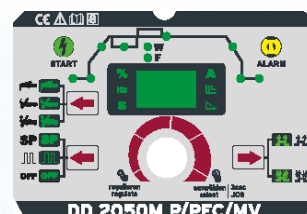

Operating panel DD 2050M P/PFC/MV Operating panel DD 2560T P



+ Now included in the ECO-SET-G!

TIG hose package SRC 26/4m – HF incl. UP/DOWN current control on the handle



Operating panel
AD 2060M

+ Now included in the ECO-SET-W!

TIG hose package SRC 18/4m – HF incl.
UP/DOWN current control on the handle
In addition to ECO-SET-G: Water cooling unit,
transport trolley & cooling liquid

TIG AC/DC, MMA/E manual welding inverter AD 2060M P/PFC/MV ECO-SET-G & W

discount up to
-18%
**START UP
SERVICE**

- > AC/DC constant or pulsed welding current (0.3-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > Multi-voltage version, 2-step/repeat/4-step or spot welding, JOB memory
- > PFC design for stable welding process with fluctuating mains voltage, e.g. power generator operation or long supply cables (up to 100 m / 3 x 2.5 mm²)
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.

Model		AD 2060M P/PFC/MV	
Technical data		TIG	MMA
Welding current setting range	A	5–200	5–200
Weldable electrodes Ø	mm	1.0–4.0	1.6–5.0
Duty cycle at max. welding current at 40°C	% / A	60/200	35/200
100% duty cycle at welding current at 40°C	% / A	100/155	100/110
Input power I1 max. / I1 eff.	A	21/16	32/19
Slow fuse protection	AT	16	32
Protection type	IP	IP23	
Mains voltage / fuse protection	V / A	230/16	230/32
Weight	kg	15.5	
Order data ECO-SET-G			
Order number		15061	
Instead of RRP excl. VAT		1,805.00	
RRP excl. VAT		1,479.00	
Order data ECO-SET-W			
Order number		15062	
Instead of RRP excl. VAT		2,855.00	
RRP excl. VAT		2,349.00	



+ Now included in the ECO-SET-G!

TIG hose package SRC 26/4m – HF incl. UP/DOWN current control on the handle



Operating panel
AD 2540T P

+ Now included in the ECO-SET-W!

TIG hose package SRC 18/4m – HF incl. UP/
DOWN current control on the handle
In addition to ECO-SET-G: Water cooling unit,
transport trolley & cooling liquid

TIG AC/DC, MMA/E manual welding inverter AD 2540T P ECO-SET-G & W

**START UP
SERVICE**

- > AC/DC constant or pulsed welding current (0.5-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > 2-cycle/repeat/4-cycle or spot welding, JOB memory
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.


Model		AD 2540T P	
Technical data		TIG	MMA
Welding current setting range	A	10–250	10–250
Weldable electrodes Ø	mm	1.0–4.0	1.6–5.0
Duty cycle at max. welding current at 40°C	% / A	40/250	40/250
100% duty cycle at welding current at 40°C	% / A	100/158	100/158
Input power I1 max. / I1 eff.	A	12.5/7.9	15/9.5
Open-circuit voltage	V	14.5	71
Protection type	IP	IP21S	
Mains voltage / fuse protection	V / A	400/16	
Weight	kg	15.5	
Order data ECO-SET-G			
Order number		15066	
Instead of RRP excl. VAT		2,240.00	
RRP excl. VAT		1,899.00	
Order data ECO-SET-W			
Order number		15067	
Instead of RRP excl. VAT		3,300.00	
RRP excl. VAT		2,805.00	

WIG/TIG AC/DC welding inverter

AD 3260T P ECO-SET-W | elmag.eu/15076



- > AC/DC constant or pulsed welding current (0.5–999 Hz), AC square wave, AC sine wave or AC triangular wave, AC balance (+/- 5), AC frequency control (50–250 Hz), Hot Start+, Arc Force+
- > 2-cycle/repeat/4-cycle or spot welding, JOB memory
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper, e.g. for boiler, container, staircase and railing construction, aluminium structures, etc.

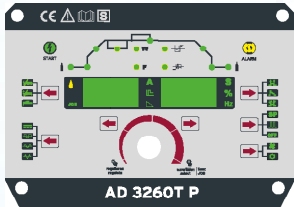

Operating panel
AD 3260T P

Model	AD 3260T P		
Technical data		TIG	MMA
Welding current setting range	A	10–320	10–320
Weldable electrodes Ø	mm	1.0–4.0	1.6–6.0
Duty cycle at max. welding current at 40°C	% / A	60/320	60/320
100% duty cycle at welding current at 40°C	% / A	100/250	100/250
Input power I1 max. / I1 eff.	A	23/18	31/24
Open-circuit voltage	V	74	57
Protection type	IP	IP23	
Mains voltage / fuse protection	V / A	400/32	
Weight	kg	87	
Order data			
Order number		15076	
Instead of RRP excl. VAT		4,120.00	
RRP excl. VAT		3,499.00	



discount
-15%



Now included in the ECO-SET-W!

TIG hose package SRC 18/4m – HF incl. UP/DOWN current control on the handle, E-holder & ground cable, water cooling unit, transport trolley, coolant (device filled), pressure regulator, gas hose, TIG gloves, wear parts set & START-UP SERVICE

Tungsten electrode grinder

WSG 4 | elmag.eu/56470

- > Precise sanding of tungsten electrodes ensures the best welding results
- > Practical hand tool in a case for mobile use on the construction site or in the workshop
- > For sanding or cutting electrodes to length
- > Grindable electrode Ø: 1.0/1.6/2.0/2.4/3.2/4.0 mm
- > Various sanding angles: 15/18/22.5/30°
- > Grindable electrode length min: 30 mm
- > Grinding disc Ø: 33.5 mm (can be used on both sides)
- > Speed: (adjustable) max. 11,000 rpm
- > Engine power: 750 W / 230 V mains connection
- > Weight: 1.6 kg



instead of price excl. VAT
439.-
discount
-16%
369.-



Tungsten electrode grinder

WSG 5 | elmag.eu/56475

- > Practical tabletop device with integrated stop for setting the optimum grinding length
- > Clamping and grinding using electrode clamps is also easy to carry out with leather gloves; electrodes with spherical caps or alloyed metal drops can also be ground
- > The grinding process takes place in the longitudinal direction of the electrode and thus improves the ignition properties, ensuring a more stable arc and longer service life
- > Grindable electrode Ø: 1.6/2.0/2.4/3.2/4.0/5.0 mm
- > Infinitely adjustable sanding angle: 10–60°
- > Grindable electrode length min: 35 mm
- > Grinding disc Ø: 90 mm
- > Speed: 6,500 rpm
- > Engine power: 60 W / Mains connection: 230 V / Weight: 4.0 kg



instead of price excl. VAT
469.-
discount
-15%
399.-





Induction heater

4Z 1250 | elmag.eu/57900

- > Output power: 1.25 kW
- > Mains connection: 230 volt
- > Includes 5 standard attachments: Ø 26 mm / straight helix, Ø 37 mm / straight helix, flat induction coil, U-shaped induction cable, flexible induction cable L=1,000 mm
- > Fast heating without open flame
- > Loosening stuck bolts, nuts, tie rods, etc.
- > **Optional: Induction coil set, 10 pieces** elmag.eu/57902 (RRP: €159.- excl. / €189.21 incl. 19% VAT) consisting of: 1 each of Ø 17, 20, 26, 32, 37, 43 & 50 mm straight helix, 1 flat induction coil, 1 U-shaped induction cable, 1 flexible induction cable L=1,000 mm



Induction coil set, 10 pieces



instead of price excl. VAT
560.- **discount -11%**
499.-



Induction heater

IHZ 2250 | elmag.eu/57901

- > Output power: 2.25 kW
- > Mains connection: 230 volt
- > Includes 6 standard attachments: Ø 20 mm / straight helix, Ø 32 mm / straight helix, Ø 43 mm / straight helix, flat induction coil, U-shaped induction cable, flexible induction cable L=1,000 mm
- > Fast heating without open flame
- > Loosening stuck bolts, nuts, tie rods, etc.
- > **Optional: Induction coil set, 10 pieces** elmag.eu/57902 (RRP: €159.- excl. / €189.21 incl. 19% VAT) consisting of: 1 each of Ø 17, 20, 26, 32, 37, 43 & 50 mm straight helix, 1 flat induction coil, 1 U-shaped induction cable, 1 flexible induction cable L=1,000 mm



Induction coil set, 10 pieces



instead of price excl. VAT
870.- **discount -10%**
779.-



Induction heater, water-cooled

iT 3.7K230 LCD EVO | elmag.eu/59201

- > Output power: 3.7 kW
- > incl. user-friendly LCD display
- > For heating and loosening stuck and rusted parts: Chassis parts, exhaust systems, brake lines, body parts, drive shafts, lambda probes, axle parts
- > Quick loosening of wheel nuts and bolts
- > 5 selectable heating levels, 230 volt, only 16 kg
- > 3 m hose package, 2.6 m supply cable

FREE NOW!

Induction heating head for frontal heating



instead of price excl. VAT
3,240.- **discount -15%**
2,739.-




Induction heater, water-cooled

iT 5K400 LCD | elmag.eu/59203

- > Output power: 5 kW
- > incl. user-friendly LCD display
- > Possible uses like iT 3.5K230 LCD
- > 5 selectable heating levels, 400 volt
- > 3 m hose package, 8 m supply cable
- > Weight 66 kg

FREE NOW!

Induction heating head for frontal heating



instead of price excl. VAT
5,456.- **discount -15%**
4,639.-

Induction heater, water-cooled

HDi 11K400 TC | elmag.eu/59206

- > Output power: 11 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touch-screen with temperature display of the cooling liquid, electronics and transformer (°C/F)



discount
-9%

WELDING

Models		
Technical data		HDi 11K400 TC
Performance	kW	11
Induction hose package length	m	4.25
Supply cable from the generator	m	8
Selectable heating output	Steps	5
Connector plug	-	CEE 16 A
Grid connection/phases	V/~	400/~3
Power frequency	Hz	50/60
Slow fuse protection	AT	16
Weight	kg	120
Order data		
Order number		59206
Instead of RRP excl. VAT		8,572.00
RRP excl. VAT		7,839.00



FREE NOW!

Induction heating head
for frontal heating



Water-cooled induction heater

HDi 16K400 TC | elmag.eu/58227

HDi 225K400 TC | elmag.eu/58219

- > Output power: 16 or 22.5 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touch-screen (HDi 225K400 TC with timer function), temperature display of the cooling liquid, electronics and transformer (°C/F)

16K400 TC

225K400 TC



discount
-15%

Models			
Technical data		HDi 16K400 TC	HDi 225K400 TC
Performance	kW	16	22.5
Induction hose package length	m	4.25	6
Supply cable from the generator	m	8	8
Selectable heating output	Steps	5	5
Connector plug	-	CEE 32 A	CEE 32 A
Grid connection/phases	V/~	400/~3	400/~3
Power frequency	Hz	50/60	50/60
Slow fuse protection	AT	25	32
Weight	kg	130	140
Order data			
Order number		58227	58219
Instead of RRP excl. VAT		11,196.00	11,676.00
RRP excl. VAT		9,519.00	9,925.00



FREE NOW!

Induction heating head
for frontal heating



HDi 16K400 TC





V-belt drilling machine SET

KBM 16 T Vario | elmag.eu/16036

discount
-16%

- > Digital speed display
- > Control lever for speed adjustment
- > Speed adjustment by means of variator disc
- > LED work light
- > Incl. laser drill indicator



Now included in the SET!

350 ml cutting oil spray, machine vice,
2 clamping screws and HSS twist drill cassette



Model		16 T Vario
Technical data		
Drilling capacity in steel	mm	16
Spindle holder	MK	MK2
Speed range	rpm	340–2,200
Speed steps	-	variable
Quill stroke	mm	90
Column diameter	mm	60
T-groove width	mm	14
Spindle projection	mm	150
Quill distance from table	mm	360
Engine power	W	550
Mains connection	V/Hz	230 / 50-60
Weight	kg	42
Order data		
Order number		16036
Instead of RRP excl. VAT		493.00
RRP excl. VAT		415.00



Fig. shows machine incl.
optional base frame
(item no. 81038)

Thread cutting arms

EGM series

discount upto
-27%

- > The swivelling cutting arms with a large radius enable easy positioning of the tap on the workpiece.
- > Thread cutting at any desired angle from 0° to 90°
- > Suitable for materials such as steel, stainless steel and aluminium
- > Highest accuracy, very time-saving drilling system
- > Operation via touch display (German)
- > Digital torque monitoring and thread depth adjustment
- > Includes quick-release chuck with integrated slip clutch
- > Underframe optionally available (item no. 81038)

Product video:



Optional accessories	Order number	Instead of RRP excl. VAT	RRP excl. VAT
Mobile base frame	81038	577.00	490.00
MH 300 magnetic holder for EGM 316	81041	410.00	360.00
MH 600 magnetic holder for EGM 336	81042	540.00	430.00

Models	Threaded bores	Working radius	Angle	Speed range	Voltage	Motor power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		mm	°							
EGM 316	M3–M16	1,100	0–90	0–312	230	600	25	81037	1,350.00	990.00
EGM 336	M6–M36	1,100	0–90	0–150	230	1,200	45	81039	1,845.00	1,440.00

Geared pillar drills

GBM 3/25 & 3/30 – Sets

- > Automatic quill feed (with GBM 3/30 SNA)
- > Digital drilling depth indicator
- > Machined base plate
- > Two-stage engine
- > Smooth-running high-quality gearbox with heavy-duty helical gearing
- > High-speed, up to 3,010 rpm
- > 4 feed stages (with GBM 3/30 SNA)
- > Feed rates 0.1 / 0.15 / 0.22 / 0.3 mm/rev
- > MK3 spindle clamp
- > 400 volt voltage

 discount
-10%

Now included in the SET!

350 ml cutting oil spray,
 machine vice,
 2 clamping screws and
 HSS twist drill cassette


GBM 3/25 TNE

GBM 3/30 SNA

Models	Drilling capacity in steel	Speed levels / range	Quill stroke	Quill distance to table	Projection	Motor power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	mm	W	kg			
GBM 3/25 TNE	25	8 / 105–2,900	120	0–580	255	900/650	130	82002	2,980.00	2,680.00
GBM 3/25 SNE	25	8 / 105–2,900	120	0–840	255	900/650	180	82005	3,240.00	2,910.00
GBM 3/30 SNA	30	8 / 75–3,010	150	50–820	320	900/1,200	210	82007	4,550.00	4,100.00

Geared pillar drills

GBM SGA series – set



- > Drilling capacity 35.40 or 50 mm
- > Electromagnetic quill stroke (0.1 / 0.15 / 0.22 / 0.33 mm/rev, 0.1 / 0.2 / 0.3 mm/rev or 0.07 / 0.15 / 0.26 / 0.4 mm/rev)
- > Piston stroke of 150 or 180 mm
- > Spindle extension 320, 325 or 360 mm
- > MK4 spindle clamp
- > Automatic tool ejection
- > Smooth-running high-quality gearbox with heavy-duty helical gearing
- > Drill spindle with precision bearing right/left rotation
- > Tapping mode with reversible direction of rotation that can be switched on the operating lever
- > GBM 4/40 & 4/50: Incl. integrated coolant unit

 discount UPTO
-11%

Now included in the SET!

350 ml cutting oil spray,
 machine vice,
 2 clamping screws and
 HSS twist drill cassette


GBM 4/35 SGA

GBM 4/40 SGA

Models	Drilling capacity in steel	Speed levels / range	Quill stroke	Quill distance to table	Motor power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	W	kg			
GBM 4/35 SGA	35	8 / 75–3,010	150	10–860	1,500/1,800	310	82013	5,590.00	4,990.00
GBM 4/40 SGA	40	12 / 70–2,600	150	45–600	2,200/1,500	670	82008	7,260.00	6,540.00
GBM 4/50 SGA	50	12 / 42–2,050	180	60–600	2,800/2,200	740	82009	9,050.00	8,140.00




Radial column drill

RBS 50 Vario | elmag.eu/82109

discount
-10%

- > Ideal design for large-scale heavy-duty drilling
- > Torsion-resistant, heavy-duty boom construction with solid, ground steel column
- > Base body made of heavily ribbed, fine-grained grey cast iron
- > Extremely low vibration and smooth running
- > Simple speed and feed adjustment using control lever
- > Drill spindle with precision bearings, high concentricity
- > Right and left rotation
- > Drill head stroke by means of stroke spindle drive, hardened stroke spindle

Model	RBS 50 Vario	
Technical data		
Drilling capacity in steel	mm	50
Thread-cutting performance	M	M32
Spindle holder	MK	MK 4
Speed range	rpm	50–2,000
Speed steps	-	variable
Spindle projection	mm	0–960
Rotatable drilling head	°	± 180°
Drilling table surface	mm	1,200 × 505
Engine power	W	3,000
Mains connection	V/Hz	400 / 50-60
Weight	kg	2,740
Order data		
Order number	82109	
Instead of RRP excl. VAT	44,140.00	
RRP excl. VAT	39,700.00	

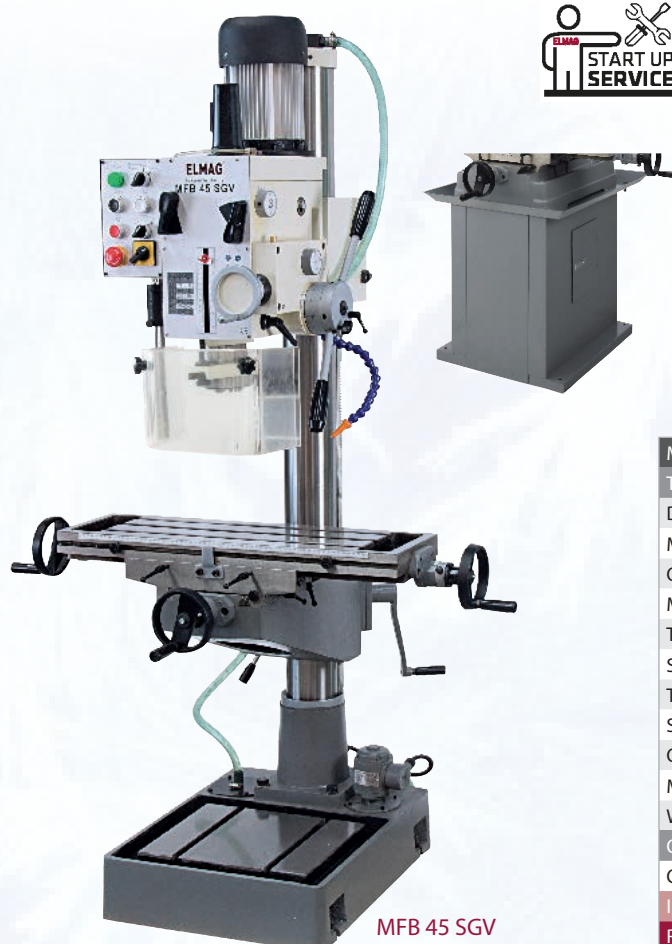

MFB 45 SGV

Gear milling and drilling machine MFB series

discount upto
-18%

- > High-quality, high-tech machines for all applications
- > High-performance gearbox running in an oil bath
- > Integrated thread cutting device
- > Milling spindle with precision bearing and pull-in spindle for high safety
- > Smooth-running cross table with T-slots and coolant channel
- > X-axis cross table with infinitely adjustable feed and rapid traverse
- > Integrated coolant system with return flow, tank in the machine base



FREE NOW!

Machine stand
for MFB 45 TGV

Models		MFB 40 TGV	MFB 45 TGV	MFB 45 SGV
Technical data				
Drilling capacity in steel	mm	40	45	45
Milling performance face/shank	mm	76/32	80/32	80/32
Quill stroke	mm	120	120	120
Milling table surface	mm	730 × 210	800 × 240	730 × 210
T-groove width	mm	14	14	14
Speed range	rpm	6/75–1,600	12/75–3,200	12/75–3,200
Table distance X × Y	mm	500 × 210	455 × 180	375 × 200
Spindle projection	mm	210	260	270
Quill distance from table	mm	25–450	25–475	0–790
Mains connection	V/Hz	400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg	315	278	350
Order data				
Order number		82153	82100	82101
Instead of RRP excl. VAT		3,190.00	4,100.00	4,580.00
RRP excl. VAT		2,630.00	3,690.00	3,740.00

Universal milling machines

UFM series

- > Right and left rotation
- > Milling spindle with precision bearing and pull-in spindle for high safety
- > Smooth-running, precise cross table with T-slots and coolant groove
- > Central lubrication, integrated coolant system with return flow
- > LED milling table lighting
- > With digital position indicator

Models		UFM 125	UFM 250 L Vario
Technical data			
Drilling capacity in steel	mm	-	50
Milling performance face/shank	mm	125/40	125/40
Spindle holder	ISO	ISO 40	ISO 40
Speed steps		variable – mechanical	variable – frequency converter
Speed range	rpm	45–1,660	65–4,500
Spindle projection	mm	60–500	190–730
Swivelling milling head	°	± 180°	± 90°/± 45°
Quill distance from table	mm	80–500	0–375
Milling table stroke	mm	420	420
Milling table surface	mm	1,120 × 260	1,370 × 254
Table distance X × Y	mm	600 × 300	930 × 370
Engine power	W	2,200	2,250
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	1,480	1,400
Order data			
Order number		82133	82163
Instead of RRP excl. VAT		16,125.00	17,810.00
RRP excl. VAT		13,570.00	15,150.00



discount UPTO
-16%

METALWORKING

Tool milling machines

WFM Servo drive series

- > Automatic stroke and rapid feed X/Y/Z
- > Ball screw and stepless drives on all axes X/Y/Z
- > Horizontal and vertical milling table
- > Vertical milling head incl. adjustable boring sleeve
- > Digital speed display of the milling spindle
- > Incl. digital position indicator and coolant pump
- > Optionally available: Table enclosure

Models		WFM 210	WFM 310
Technical data			
Drilling capacity in steel	mm	50	50
Milling performance of face-milling cutters	mm	125	125
Milling performance of end mills	mm	40	40
Spindle holder	ISO	ISO 40	ISO 40
Speed range	rpm	40–2,000	40–2,000
Speed steps	-	variable	variable
Quill stroke	mm	65	65
Milling table surface	mm	750 × 320	800 × 400
Table distance X × Y	mm	405 × 305	500 × 400
Vertical table surface	mm	890 × 225	1020 × 225
Engine power	W	3,700	3,700
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	1,450	1,550
Order data			
Order number		82125	82126
Instead of RRP excl. VAT		42,180.00	45,950.00
RRP excl. VAT		38,590.00	37,760.00



discount upto
-18%



Universal lathe

PROFI 1000/180 N | elmag.eu/88153

discount
-10%



- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > With digital position indicator
- > Durable main gearbox with gears running in an oil bath
- > Spindle bore 51 mm for extra-long shafts
- > Spindle holder CAMLOCK D1-5 DIN 55029, spindle taper MK 6

Extensive standard equipment:

Four-jaw face plate chuck Ø 200 mm, clamping disk Ø 320 mm, 2 fixed centring points, MK 3 revolving centring point, travelling rest, steady rest & micrometer



FOR FREE!

RÖHM lathe chuck and quick-change steel holder set



RÖHM



Model		PROFI 1000/180 N
Technical data		
Centre width / Centre height	mm	1,000/180
Turning diameter over bed / slide	mm	360/224
Spindle bore	mm	51
Spindle speeds Number / range	rpm	8 / 70–2,000
Engine power, 400 volt	kW	1.5
Weight	kg	520
Order data		
Order number		88153
Instead of RRP excl. VAT		9,610.00
RRP excl. VAT		8,650.00




Universal lathes

PROFI 1000/180 HD | elmag.eu/88170

PROFI 1000/200 HD | elmag.eu/88167

discount upto
-11%

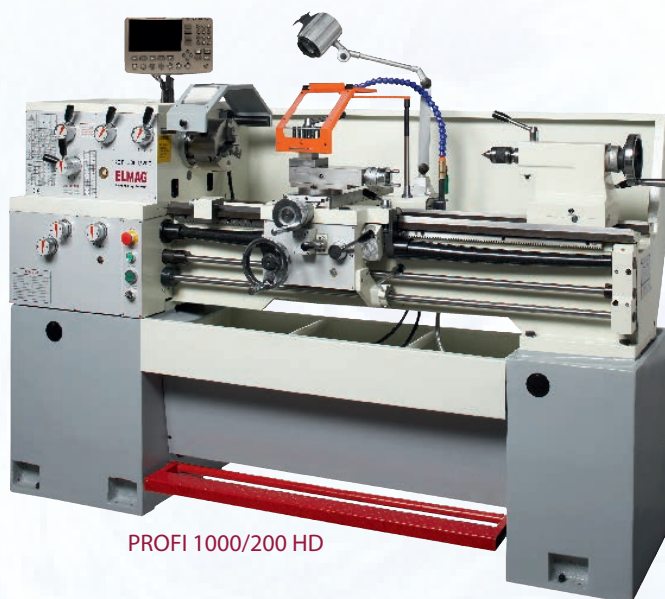

PROFI 1000/200 HD

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > Coolant container and pump integrated in the machine base
- > Incl. digital 3-axis position indicator
- > With large spindle bore Ø 40 or 51 mm



FOR FREE!

RÖHM lathe chuck and quick-change steel holder set



RÖHM



Model		1000/180 HD	1000/200 HD
Technical data			
Centre width / Centre height	mm	1,000/180	1,000/200
Turning diameter over bed / slide	mm	360/210	400/214
Spindle bore	mm	40	51
Spindle speeds Number / range	rpm	12 / 40–1,800	12 / 40–1,700
Engine power, 400 volt	kW	2.4	2.4
Weight	kg	1,200	1,200
Order data			
Order number		88170	88167
Instead of RRP excl. VAT		14,640.00	13,120.00
RRP excl. VAT		13,125.00	11,630.00


Universal lathes

INDUSTRIE 230/330 HD series

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > Powerful and robust for trade & industry
- > Coolant container and pump integrated in the machine base
- > Drilling capacity 80 or 105 mm
- > Incl. digital 3-axis position indicator

Extensive standard equipment:

Four-jaw faceplate chuck Ø 315 or 400 mm, clamping face Ø 350 or 610 mm, 2 fixed centring points, MK 5 travelling centre point, travelling bezel, fixed bezel & dial gauge

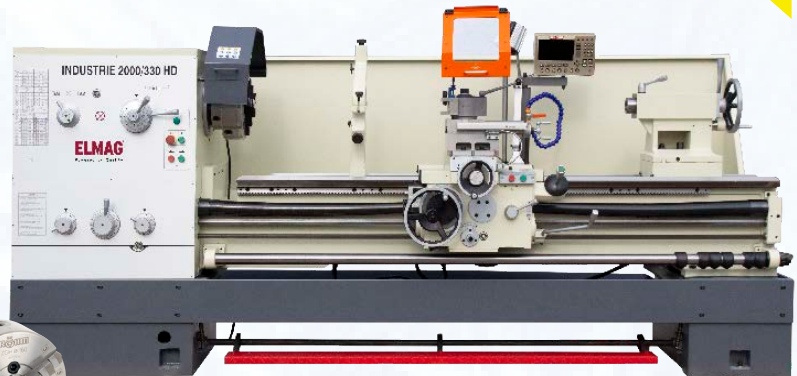

INDUSTRIE 2000/330 HD



discount up to
-18%

METALWORKING

Models		1000/230 HD	1000/330 HD	1500/330 HD	3000/330 HD
Technical data					
Centre width / Centre height	mm	1,000/230	1,000/330	1,500/330	3,000/330
Turning diameter over bed / slide	mm	460/290	660/420	660/420	660/420
Spindle bore	mm	80	105	105	105
Spindle speeds Number / range	rpm	12 / 25–1,800	12 / 36–1,600	12 / 36–1,600	12 / 36–1,600
Engine power, 400 volt	kW	5.5	7.5	7.5	7.5
Weight	kg	2,635	3,000	3,200	3,900
Order data					
Order number		88173	88164	88172	88154
Instead of RRP excl. VAT		26,680.00	36,480.00	37,450.00	45,990.00
RRP excl. VAT		23,750.00	29,990.00	30,580.00	39,100.00

Universal lathes

PREMIUM CU series RD-Vario

- > Hardened and precision-ground lathe spindle
- > Smooth-running lathe spindle, stroke reverse switch
- > Solid tail-stock with taper turning adjustment
- > Precise slide guidance, adjustable
- > With variable speed control
- > Incl. digital 3-axis position indicator
- > Optionally available: Travelling rest, steady rest, steady rest with ball bearing guide, face plate & 4-jaw face plate chuck



PREMIUM CU 400 RD Vario



discount up to
-13%

Models		325 RD-Vario	400 RD-Vario	500 RD-Vario	630 RD-Vario
Technical data					
Centre width / Centre height	mm	1,000/165	1,000/200	1,500/250	2,000/315
Turning diameter over bed / slide	mm	325/190	400/230	500/300	630/430
Spindle bore	mm	32	52	72	103
Spindle speeds Number / range	rpm	variable / 85–2,200	variable / 18–2,120	variable / 25–2,000	variable / 16–1,250
Engine power, 400 volt	kW	2.2	4	11	11
Weight	kg	700	1,590	2,800	3,310
Order data					
Order number		88601	88625	88681	88641
Instead of RRP excl. VAT		22,230.00	42,860.00	51,175.00	60,975.00
RRP excl. VAT		21,125.00	37,490.00	48,550.00	54,470.00



Metalworking circular saw

VHKS 230 Laserliner | elmag.eu/78389

discount
-26%

The VHKS 230 Laserliner is a high-tech metal hand-held circular saw for manually feeding and cutting pipes, profiles, grids and sheets made of steel, non-ferrous metals, plastics and composite materials.

- > Dry, burr-free cut
- > Saw blade outer/inner diameter: 230/25.4 mm
- > Very good handling – non-slip, ergonomic handle and lightweight, impact-resistant housing
- > With carbide-tipped saw blade for low-vibration and better cutting results with less noise
- > Angle adjustment from 0-45° for mitre cuts
- > Engine power: 1,800 watt, mains voltage of 230/50 volt/Hz
- > **Incl. Japanese saw blade, practical transport case and Laserliner**

Model	Max. cutting depth at 90° / 45°	Speed	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	rpm	kg			
VHKS 230	83/56.5	2,300	9.5	78389	515.00	380.00

suitable for stainless steel



TB 100



TB 125 Vario

Metalworking band saws

TB series

discount up to
-17%

- > Lightweight metal band sawing machine for small to medium-sized sawing jobs
- > Super-quiet – sound pressure level at cutting load steel only 65 dB
- > High-quality band saw blade made of bimetal cobalt for cutting with and without coolant
- > Can be used anywhere: with 230 V schuko plug
- > Easy transportation – with transport chain, chain hook and carrying handle
- > Extensive standard equipment:
Quick-release vice, angle clamp, angle stop, etc.

Optional accessories	Order Number	Instead of RRP excl. VAT	RRP excl. VAT
Mounting stand	78111	194.00	145.00

Model		TB 100	TB 125 Vario	TB 150 Vario
Technical data				
Maximum cutting capacity	mm	150 x 100	122 x 122	150 x 140
Saw blade length	mm	1,470	1,440	1,735
Saw blade height	mm	13	13	13
Saw blade strength	mm	0.65	0.65	0.65
Maximum vice opening	mm	160	>125	>150
Cutting angle	°	0-45	0-60	0-60
Cutting speed	m/min	45	30-80	30-63
Engine power	W	370	375	450
Mains voltage / frequency	V/Hz	230 / 50-60	230 / 50-60	230 / 50-60
Length	mm	810	705	900
Width	mm	290	290	350
Height	mm	400	490	500
Weight	kg	22	21	27
Order data				
Order number		78110	78131	78132
Instead of RRP excl. VAT		1,020.00	726.00	1,140.00
RRP excl. VAT		870.00	610.00	950.00

Metal band saws

HY 305x178 | elmag.eu/78003

discount
-13%

- > Safe saw blade guidance through adjustable tensioning bearings
- > Precisely adjustable clamping bearings for play-free adaptation
- > Clean thanks to chip remover and chip brush, easy saw band change
- > Reliable with saw blade guard, end switch, finger guard, AutoOFF switch-off, emergency stop, zero-voltage release, CE compliant
- > **Plug & Play with oil filling and high-quality bimetal cobalt band saw blade**

Model	HY 305x178	
Maximum cutting capacity	mm	305 x 178
Saw blade dimensions	mm	2,362 x 19 x 0.9
Cutting angle	°	0-45
Cutting speed 1/min.	m/min	22/34/49/64
Engine power	W	750
Mains voltage / frequency	V/Hz	400 / 50-60
Feed height	mm	530
Weight	kg	140
Order number	78003	
Instead of RRP excl. VAT	1,430.00	
RRP excl. VAT	1,250.00	



Picture shows machine without included saw blade tension display

Metalworking band saws

CY series

- > Powerful drive motor
- > Central operating panel
- > Adjustable saw blade guide at the front with finger guard
- > Rotatable saw blade frame
- > Fixed vice
- > Precisely adjustable pair of chucks
- > Flexible cooling line



Fig. shows machine without included belt tension display

CY 200x170 G

Models		CY 200x170 G	CY 260x200 G
Technical data			
Maximum cutting capacity	mm	200 × 170	260 × 200
Saw blade dimensions	mm	2,085 × 20 × 0.9	2,455 × 27 × 0.9
Cutting thickness	mm	1.2	1.2
Vice opening	mm	0-215	0-260
Cutting angle	°	0-60	0-60
Speed steps	No.	2	2
Cutting speed 1 / min	m/min	42	34
Cutting speed 2 / max.	m/min	84	68
Motor power of saw blade drive	W	750/1,100	750/1,100
Mains voltage / frequency	V/Hz	400 / 50-60	400 / 50-60
Feed height	mm	890	900
Weight	kg	175	220
Order data			
Order number		78004	78007
Instead of RRP excl. VAT		1,825.00	1,990.00
RRP excl. VAT		1,670.00	1,990.00



CY 260x200 G



Band saw machine EasyCut 275.230 DG

elmag.eu/78900



- > The EasyCut series is a universal gravity band saw with a robust cast iron saw frame and saw blade with a height of 27 mm
- > Precise guidance of the saw band thanks to carbide guides
- > The saw frame is mounted with preloaded tapered roller bearings
- > Synchronised brushes for chip removal
- > The feed speed of the saw frame is continuously controlled by a hydraulic cylinder with overflow valve

instead of price excl. VAT
5,180.-

discount
-10%

4,660.-

0°	230	275 × 180	250 × 230	230
45°R	190	190 × 150	170 × 230	180
60°R	120	120 × 100	120 × 100	100
45°L	170	185 × 100	90 × 230	150

Model	Operating mode	Mitre range	Saw blade speed	Saw blade dimensions	Remaining piece length	Inlet height	Dimensions l1xw1xh	Drive	Weight
275.230 DG	manual	-45° to 60°	40/80	2,720 × 27 × 0,9	20	978	1,588 × 1,150 × 1,477	1.1/1.5/3 × 400/50	370



Band saw machines BOMAR Ergonomic series

discount up to
-14%

- > Universal band saw machine with a robust cast iron saw frame and 27 mm band saw blade
- > The precise carbide guide of the saw blade is the prerequisite for excellent cutting performance
- > Drive 1.5 or 2.2 kW, 3 × 400 / 50 V / Hz
- > Hydraulic cutting pressure monitoring and infinitely adjustable saw blade speed on semi-automatic Models

		320.258 DGH	340.278 DGH	375.308 DGH
○	0°	258	278	308
	45°	210	260	250
	60°	135	155	155
□	0°	250	275	308
	45°	195	230	235
	60°	110	115	105
▭	0°	320 × 100	340 × 100	375 × 220
	45°	210 × 100	230 × 100	235 × 200
	60°	135 × 100	145 × 100	150 × 95
▭	0°	275 × 250	340 × 275	340 × 308
	45°	185 × 245	230 × 255	220 × 285
	60°	135 × 110	145 × 115	160 × 105

DGH: Double mitre with semi-automatic

Models	Operating mode	Mitre range	Saw band speed	Saw blade dimensions	Remaining piece length	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		°	m/min	mm	mm	kg			
320.258 DGH	semi-automatic	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78904	9,900.00	8,880.00
340.278 DGH	semi-automatic	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78906	11,280.00	10,160.00
375.308 DGH	semi-automatic	-45° to 60°	20-120	3,380 × 27 × 0.9	20	400	78913	13,240.00	11,360.00

Swivel bending machine SBM 1270 × 2.0 mm HS(S) 2.0

Modern bending technology – optimised handling

- > Working or bending length max. 1,270 mm
- > Sheet thickness up to 2 mm
- > Large bending angle 0–135°
- > Bending beam segments made of high-alloy, ground special steel
- > HS models: Upper beam segments can be removed and repositioned, bending and lower beam monobloc
- > HSS models: Upper and bending beam segments can be removed and moved, lower beam monobloc
- > Segment widths 25/30/35/40/45/50/75/100/150/200/(250)/270 mm
- > Opening width between upper and lower cheek max. 48 mm
- > Precise upper and bending beam adjustment for rapid adaptation to different material thicknesses
- > Eccentric technology for effortless bending beam actuation
- > Powerful cylinder for energy-saving work
- > Robust, very durable construction



discount UPTO
-29%

METALWORKING



Models	Sheet thickness max.	Working length max.	Upper beam segments	Bending beam segments	Lower cheek segments	Opening max.	Bending angle	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	mm				mm	°	kg			
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	1	1	48	0-135	320	81107	2,220.00	1,760.00
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	12	1	48	0-135	335	81108	2,730.00	1,940.00

Electro-hydraulic workshop presses WPMEH series

- > Electro-hydraulic drive, two drive speeds
- > Hydraulic cylinder laterally adjustable
- > Switching valve for permanent operating speed
- > Press table with locking bolt and press table chain for convenient height adjustment
- > Additional manual hand pump
- > Incl. overload safety valve and pressure gauge
- > Chrome-plated cylinder piston



Models		WPMEH 60/2-K	WPMEH 100/2-K
Technical data			
Pressing capacity max.	t	60	100
Oil flow rate level 1/2	l/min	2.82/11.84	5.64/17.2
Piston speed level 1/2	mm/s	8.69/2.07	7.54/2.47
Return speed	mm/s	10.79	9.06
Engine power	kW	1.5	2.2
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	540	970
Order data			
Order number		81811	81816
Instead of RRP excl. VAT		7,315.00	9,390.00
RRP excl. VAT		6,710.00	8,900.00



WPMEH 100/2-K



PROFI double grinding machine

DS150 TS | elmag.eu/61091

discount
-15%

Double grinding machine with grinding discs Ø 150 mm and moderate 230 V drive, 450 W motor power. With a grain size of 80/100 for fine grinding and precise sharpening.

Model		DS150 TS
Technical data		
Left grinding disc Ø / width / bore	mm	150 / 20 / 25
Right grinding disc Ø / width / bore	mm	150 / 40 / 25
Speed	rpm	2,850
Drive engine power	W	450
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	14.5
Order data		
Order number		61091
Instead of RRP excl. VAT		390.00
RRP excl. VAT		330.00



Combination sanding machine

KSM 150/686 | elmag.eu/61090

discount
-30%

- > Combination sanding machine for versatile use.
- > Shaping – Regrinding – Sharpening

Model		KSM 150/686
Sanding disc Ø / width / bore	mm	150 / 20 / 12.7
Sanding speed	m/s	23.4
Sanding belt speed	m/s	15.4
Sanding belt width / length	mm	50/686
Surface grinding area	mm	285 x 50
Speed	rpm	2,980
Engine power	W	250
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	7
Order number		61090
Instead of RRP excl. VAT		84.00
RRP excl. VAT		59.00



Combination grinding machine

KSM 100/150 BTS | elmag.eu/61108

discount
-34%

The combined belt and disc grinder with polishing function is the right tool for a wide variety of detailed work on all materials.

Model		KSM 100/150 BTS
Technical data		
Sanding belt speed	m/s	7.3
Grinding belt width / length	mm	100/915
Surface grinding area	mm	100 x 150
Grinding arm angle	°	0-90
Speed	rpm	2,850
Drive engine power	W	370
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	6.5
Order data		
Order number		61108
Instead of RRP excl. VAT		179.00
RRP excl. VAT		119.00

Belt grinding machines BSM 100x1220 N series

- > The 230 volt model has a speed of 19 m/s and the 400 volt model has two speeds of 9.5/19 m/s.
- > Powerful and responsive – 1,500 W drive power
- > All-round protection – robust sheet steel housing, protective cover, spark protection, eye protection glass, emergency stop button, zero-voltage release, CE compliant

Models		230 volt	400 volt
Grinding belt width	mm	100	100
Grinding belt length	mm	1,220	1,220
Surface grinding area	mm	100 × 280	100 × 280
Speed	rpm	2,850	2,850
Mains voltage / frequency	V/Hz	230 / 50-60	400 / 50-60
Weight	kg	35	35
Order number		82037	82038
Instead of RRP excl. VAT		670.00	770.00
RRP excl. VAT		530.00	615.00



Picture shows BSM 100 × 1220 N 400 volt incl. optional sheet steel base (item no. 82039)

discount upto
-21%

METALWORKING

Belt grinding machines BSM 75 or 150 × 2000

- > Two speeds 29 / 14.5 m/s
- > Powerful and responsive – 3,000 or 4,000 W drive power, 400 volt
- > All-round protection – robust sheet steel housing, protective cover, spark protection, eye protection glass, emergency stop button, zero-voltage release, CE compliant

Models		BSM 75x2000	BSM 150x2000
Grinding belt width	mm	75	150
Grinding belt length	mm	2,000	2,000
Surface grinding area	mm	75 × 530	150 × 530
Swivel range	°	>90	>90
Mains voltage / frequency	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	72	90
Order number		82195	82196
Instead of RRP excl. VAT		950.00	1,190.00
RRP excl. VAT		795.00	990.00



discount upto
-17%

Drill sanding machines DBG series

- > CBN sanding disc for HSS
- > Adjusting device for centre angle 95°–135°
- > Free angle and cross sanding function
- > For drill bit Ø 2–15 or 8–32 mm
- > 11 collets 3–13 mm (315 W) or 23 collets 8–30 mm (832 W)



FREE NOW!

Collet holder and collet set ER 20 or 40

Models		DBG 315 W	DBG 832 W
Sanding range drill Ø	mm	2.1-15	8-32
Sanding range Centre angle	°	95-135	95-135
Speed	rpm	4,400	4,400
Mains connection	V/Hz	230 / 50-60	230 / 50-60
Length × Width × Height	cm	32 × 18 × 19	49 × 25 × 26
Order number		61000	61010
Instead of RRP excl. VAT		685.00	1,535.00
RRP excl. VAT		499.00	1,160.00



DBG 315 W



DBG 832 W

discount upto
-27%



High-frequency bottle vibrator

HFFR series

The high-frequency bottle vibrators with integr. frequency inverters impress with their compact design, forming a single unit. Consisting of vibrators, protective conduit, switch housing and connection cable with Schuko plug. The very high compaction performance guarantees high reliability.

Models	Bottle Ø	Hose length	Head length	Compression performance	Frequency	Volume	Weight	Order number	RRP excl. VAT
	mm	m	mm	m3/h	Hz	dB(A)	kg		
HFFR 38/5	38	5	404	20	12,000	70	14.5	64670	995.00
HFFR 50/5	50	5	468	40	12,000	76	20	64671	995.00
HFFR 59/5	59	5	499	45	12,000	79	22.8	64672	995.00



Vibratory plates

PCB series

discount upto
-17%

The vibratory plates of the PC series are designed for all types of ground work. This series of machines is used by every garden and landscape designer and on every construction site.

- > Perfect compressors for a wide range of applications
- > Easy to use & GX160 Honda petrol engine
- > Suitable for compacting granular and mixed materials, as well as hot/cold asphalt or concrete blocks
- > Incl. wheel set

Models	Centrifugal force	Max. speed	Area compaction	Performance	Plate size	Vibration frequency	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kN	m/min	m²/h	PS	mm	Hz	kg			
PCB11-35 light-HONDA	11	25	525	5	350 × 380	100	49	63009	1,200.00	995.00
PCB12-35-HONDA	12	26	546	5	350 × 550	93	75	63008	1,290.00	1,120.00
PCB14-40-HONDA	14	26	625	5	400 × 550	93	80	63002	1,340.00	1,175.00
PCB16-50-HONDA	16	26	780	5	500 × 500	93	89	63005	1,440.00	1,245.00
PCB20-50-HONDA	20	24	720	5	500 × 634	93	97	63006	1,510.00	1,325.00



Brick cutting machines

ZSM-L 890/700 – SET | elmag.eu/61375

ZSM-XL 890/700 – SET | elmag.eu/61376

discount upto
-11%

Robust design with direct drive for the construction sector. Suitable for cutting bricks, Poroton, marble and general building site material. Cutting depth easy to adjust via quick lock.

- > Incl. wheel set, transport hook and water pump
- > High-mounted cutting table for optimum control
- > Easily manoeuvrable slide on steel rollers with precision ball bearings
- > Incl. diamond cutting disc Ø 700 mm for universal use

Models	Cutting performance		Diamond cutting disc		Electric motor		Wt.	Order Number	Instead of RRP excl. VAT	RRP excl. VAT
					Rated performance	Voltage/frequency				
	mm	mm	mm	mm	kW	V/Hz	kg			
ZSM-L 890/700 – SET	250	400	700	30	4	400/50	135	61375	3,220.00	2,850.00
ZS-XL 890/700 – SET	250	520	700	30	4	400/50	140	61376	3,535.00	3,120.00

Tile cutting machine

KING 180 | elmag.eu/61700

- > Top-quality entry-level model with high concentricity.
- > Precise scale with stable longitudinal stop. 45° swivelling for jolly cuts.
- > 230 volt engine with 0.6 kW
- > Max. cutting depth: 34 mm
- > Max. cutting length: unlimited
- > Weight: 11 kg
- > With diamond disc FLIESE Ø 180 mm



instead of price excl. VAT
99.-
discount -20%
79.-

Agitators

MiniMix series

With ELMAG® quality mixers, liquid media, such as tile adhesive, mortar, plaster and paint, can be prepared in no time at all – ideal tools for tilers, pavers, plasterers and painters. Compact agitators for professional continuous use

- > incl. mixing paddles
- > All models with 2-speed gearbox
- > Variable speed adjustment in between



discount up to
-21%


Models	Speeds		Agitator		Electric motor		Wt. kg	Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Rated speed 1	Rated speed 2	Mixing cage Ø	Tool holder	Rated performance	Voltage/ Frequency				
	rpm	rpm	mm		kW	V/Hz				
MiniMix 1000	180-380	300-650	120	M14	1	230/50	4.7	61247	196.00	155.00
MiniMix 1300	180-380	300-650	140	M14	1.3	230/50	4.7	61248	254.00	205.00
MiniMix 1600	180-380	300-650	160	M14	1.6	230/50	4.7	61249	310.00	245.00

Diamond cups

Dia Profi series

Grinding, removing material, surface grinding, edge grinding, roughening – when normal grinding discs reach their limits, simply switch to diamond grinding cups and the work will be easy. Advantage: They can be used on all standard angle grinders.

- > PREMIUM models: Innovative carrier body with optimised dust extraction!

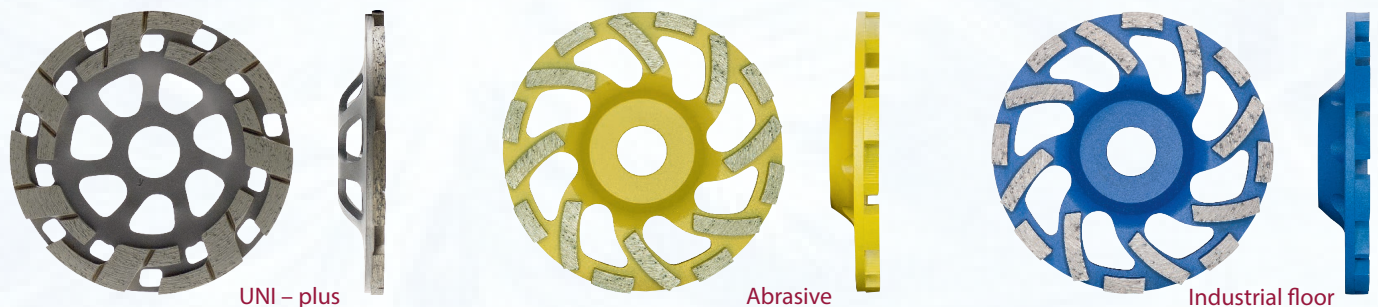

discount up to
-21%

Models			Covering Height mm	Field of application	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	mm					
DiaProfi UNI – plus	125	22.2	20	Concrete, granite, screed	62295	85.00	69.00
DiaProfi PREMIUM Abrasive	125	22.2	22	Abrasive materials, screed	62293	124.00	98.00
DiaProfi PREMIUM Industrial Floor	125	22.2	22	Grinding and levelling of industrial floors	62294	132.00	104.00

Chargers/starters

EUROSTART & EUROSTART Automatic series

ELMAG offers a comprehensive range of chargers/starters. This means that ideal unit for every user is available. Depending on the technological requirements for conventional charging and starting processes (Eurostart series) or for technically demanding vehicles with sensitive electronic components (Eurostart series – automatic).

Examples of use

- Charging
- Manual jump start
- C.P.S. Automatic jump start (automatic models only)

C.P.S. - Control
CAR PROTECTION SYSTEM
100% SAFETY
ELECTRONIC PROTECTION
VOLTAGE PROTECTION
AUTO-START FUNCTION



Eurostart 500 Automatic
 elmag.eu/55046



Eurostart 2000 Automatic
 elmag.eu/55044

instead of price excl. VAT 2,705.-
2,569.-



Models	Mains connection	Rechargeable battery types				Charging steps	Charging current		Starting function	
		Volt	Max. Ah	Start >	Type		Effective ampere	Max. ampere (10 min.)	Starting current	Max. vehicle power (diesel)
		V	Ah	12/24V			A	A	A	PS
Eurostart 250	230 V / Schuko	12 + 24	180	7.5/18V	WET/PB	2 + Boost	18	27	250	30
Eurostart 451	230 V / Schuko	12 + 24	220	7.5/18V	WET/PB	6 + Boost	30	45	450	50
Eurostart 550	230 V / Schuko	12 + 24	350	7.5/18V	WET/PB	6 + Boost	40	60	550	80
Eurostart 650 Remote start	230 V / Schuko	12 + 24	350	7.5/18V	WET/PB	6 + Boost	40	60	620	85
Eurostart 500 Automatic	230 V / Schuko	12 + 24	260	7.5/18V	WET/PB	6 + Boost	30	37	500	70
Eurostart 700 Automatic	230 V / Schuko	12 + 24	400	7.5/18V	WET/PB	6 + Boost	50	75	700	90
Eurostart 1000 Automatic	400 V / CEE 16 A	12 + 24	500	7.5/18V	WET/PB	14 + Boost	60	90	750	120
Eurostart 1300 Automatic	400 V / CEE 16 A	12 + 24	800	7.5/18V	WET/PB	12 + Boost	80	120	1,000	180
Eurostart 2000 Automatic	400 V / CEE 32 A	12 + 24	1,000	7.5/18V	WET/PB	12 + Boost	100	150	1,500	300
DIGICAR 540E	230 V / Schuko	12 + 24	540	7.5(4)/15(11.5)V	WET/PB, AGM, GEL, CA/CA	4 + Boost	36	55	380	80
DIGICAR 1100E + SUPPLY	230 V / Schuko	12 + 24	1,000	7.5(4)/15(11.5)V	WET/PB, AGM, GEL, CA/CA	4 + boost + SUPPLY	70	100	580	90

Automatic chargers/starters

DIGICAR series

The DIGICAR series of automatic chargers/starters are the all-rounders when it comes to battery charging and feature an auto jump start function with C.P.S. Control. The fully digital control system enables the charging parameters to be ideally adapted to the battery to be charged. This means that a wide range of battery types, such as WET/PB, AGM, GEL, CALCIUM, can be optimally, gently and fully charged.

- > Models 540E & 1100E + SUPPLY:
4 charging levels each at 12 and 24 V with preset charging current for various battery capacities, as well as adjustable charging time or floating mode for automatic charge maintenance (see table)
- > Model 1100E incl. SUPPLY function:
Used to maintain voltage (13.7V) or supply power (50A), e.g. when changing batteries, to ensure stored settings are not lost, to supply power to vehicles in showrooms and to carry out diagnostic work on a vehicle (50A constant power supply).

Charging steps DIGICAR 540E	Charging current		Battery capacity (max. 10 hours)
	12 V	24 V	
A	5	5	20-75 Ah
B	15	10	40-225 Ah
C	25	15	100-375 Ah
D	40	25	150-540 Ah

Charging steps DIGICAR 1100E	Charging current		Battery capacity (max. 10 hours)
	12 V	24 V	
A	5	5	20-75 Ah
B	20	15	50-375 Ah
C	40	30	300-750 Ah
D	70	40	500-1100 Ah

DIGICAR 540E
elmag.eu/55056

instead of price excl. VAT
~~721.-~~

685.-



Examples of use

- Charging
- Charge retention
- C.P.S. Automatic jump-start
- Measure battery voltage

- > Optionally available for portable Eurostart models:
Trolley elmag.eu/55052
(RRP: €175.- excl. / €208.25 incl. 19% VAT)



WORKSHOP



DIGICAR 1100E
elmag.eu/55057

instead of price excl. VAT
~~1,030.-~~

979.-



FREE NOW!
ELMAGhood with every starter!

Starting mode	Protection against		Safety fuse A	Start cable mm ² /m	Design	Dimensions mm	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	Reverse polarity	Overheating								
Manual (unit switch)	yes	yes	100	16 / 2+2	Portable	240x225x330	13	55064	284.00	255.00
Manual (unit switch)	yes	yes	2 x 75	16 / 2+2	Portable	245 x 250 x 435	18	55065	386.00	345.00
Manual (unit switch)	yes	yes	200	25 / 2.5+2.5	Mobile	320 x 487 x 745	28	55066	585.00	525.00
Manual (remote start cable 5m)	yes	yes	200	25 / 2.5+2.5	Mobile	320 x 487 x 745	31	55067	628.00	565.00
Automatic (C.P.S. Control)	yes	yes	2 x 100	25 / 2+2.5	Portable	345 x 250 x 280	20	55046	533.00	479.00
Automatic (C.P.S. Control)	yes	yes	300	25 / 2.5+2.5	Mobile	320 x 487 x 745	30	55047	807.00	725.00
Automatic (C.P.S. Control)	yes	yes	400	25 / 2.5+2.5	Mobile	320 x 487 x 745	52	55048	1,145.00	1,089.00
Automatic (C.P.S. Control)	yes	yes	500	25 / 3+3	Mobile	330 x 567 x 770	65	55049	1,975.00	1,875.00
Automatic (C.P.S. Control)	yes	yes	2 x 400	35 / 3+3	Mobile	330 x 567 x 770	80	55044	2,705.00	2,569.00
Automatic (C.P.S. Control)	yes	yes	1 x 200	16 / 2.5+2.5	Mobile	415 x 260 x 650	22	55056	721.00	685.00
Automatic (C.P.S. Control)	yes	yes	1 x 300	25 / 2.5+2.5	Mobile	487 x 320 x 745	34	55057	1,030.00	979.00



instead of price excl. VAT ~~259.-~~
discount -12%
229.-
RRP incl. 19% VAT 272.51

Energy station / starter 12V

AIR BAT 2 | elmag.eu/55089

- > Ultra-compact energy station / starter – 4 in 1: Power bank, jump start unit, electric air pump & LED lighting
- > Starting function for occasional jump-starting of motorcycles, cars, motorhomes or boat engines
Max. start: 3,000 A / I-Start: 1,750 A
- > Electronic air pump for 10-150 PSI (~ 0.7 - 10.3 bar)
- > LiFePo4 Battery 88.8 Wh
- > Scope of delivery: Jump start cable set incl. pole terminals (+/-), USB-A to USB-C charging cable, USB-C to USB-C charging cable, air hose with lever valve plug incl. various valve attachments



Type 14120, 6 & 12 V
elmag.eu/56030
instead of price ~~77.-~~
69.90

Type 14225, 12 V
elmag.eu/56032
instead of price ~~136.-~~
119.90

Type 20300, 12 V
elmag.eu/56034
instead of price ~~163.-~~
145.-

Automatic battery chargers MULTICHARGER series

discount up to
-12%

- > Automatic battery chargers for all lead-acid, MF, AGM & GEL batteries, from type 14225 also for calcium batteries (Ca/Ca)
- > Type 14120 normal charge: 6 V 1.2-14 Ah and 12 V 1.2-90 Ah, Trickle charge 1.2-120 Ah
- > Type 14225 normal charge: 12 V 14-150 Ah, trickle charge: 14-225 Ah
- > Type 20300 normal charge: 12 V 20-200 Ah, trickle charge: 20-300 Ah
- > Regeneration, summer, winter, AGM mode
- > Trickle charge, reverse polarity, short-circuit & overvoltage protection
- > Multicharger type 14120 also available in a pack of 9 incl. cardboard stand!

Automatic battery chargers 6, 12 & 24V LEM series

- > Automatic battery chargers for all lead-acid, MF, AGM, GEL & LiFePo4 batteries
- > Type 61240 maintenance charging: 6 V 1.2-14 Ah, 12 V 1.2-120 Ah, LiFePo4: 12V 1.2-120 Ah
- > Type 122470 maintenance charging: 12 V 14-225 Ah, 24 V 14-110 Ah, LiFePo4: 12V 14-225 Ah, 24 V 14-110 Ah
- > Type 1224250 maintenance charging: 12 V 50-450 Ah, 24 V 25-230 Ah, LiFePo4: 12V 50-230 Ah, 24V 25-230 Ah
- > Type 122470 & 1224250: Regeneration/boost (16V/1.5A), supply mode (13.6V/5A)
- > Trickle charge, reverse polarity, short-circuit & overvoltage protection

Type 61240, 6 & 12 V
elmag.eu/56037

instead of price excl. VAT ~~99.-~~
discount -10%
89.-

Type 122470, 12 & 24 V
elmag.eu/56039

instead of price excl. VAT ~~119.-~~
discount -12%
105.-

Type 1224250, 12 & 24 V
elmag.eu/56038

instead of price excl. VAT ~~339.-~~
discount -12%
299.-



Plastic repair system

HOT DOC | elmag.eu/59222



instead of price excl. VAT ~~239.-~~
discount -17%
199.-

- > When fully charged, the wireless device can attach up to 300 staples.
- > Input: DC 5 V 2 A / Output: Max. 3.7 V 8 A
- > Max. 600°C heating temperature, battery: 3.7 V 4000 mAh Li-ion
- > Adjustable head for angle changes, overheating and overvoltage protection
- > SET consisting of: 5 V 2 A adapter, 1M type-C USB cable, a total of 300x VA staples (0.6 mm end corrugated, 0.8 mm end corrugated, 0.6 mm for outside corners, 0.8 mm for inside corners, 0.6 mm double corrugation & 0.8 mm double corrugation)

Portable power stations 12V

START BOOSTER 1600 | elmag.eu/55074

START BOOSTER 2500 | elmag.eu/55071

- > Portable professional jump start unit for 12 volt
- > Mobile power source for 12 V consumers
- > Can be charged using the 230V mains charger or via the 12 V cigarette lighter
- > Incl. integrated LED lighting on the negative pole terminal



FREE NOW!
ELMAG hood with every POWER STATION!

discount upto
-11%

Models		START BOOSTER 1600	START BOOSTER 2500
Technical data			
Maximum current	A	1,600	2,500
I-Start	A	350	900
Charging voltage	V	14.7	14.7
Weight	kg	5.8	9
Order data			
Order number		55074	55071
Instead of RRP excl. VAT		322.00	435.00
RRP excl. VAT		289.00	389.00



START BOOSTER 2500

Portable power stations 12/24V

START TRUCK 5000/2500 | elmag.eu/55072

START TRUCK 6200/3100 | elmag.eu/55070

- > Like START BOOSTER 2500, but
- > Switchable 12/24 volt
- > Can be charged using the 230 V mains charger or via the 12 V cigarette lighter
- > Incl. integrated LED lighting on the negative pole terminal

Models		START TRUCK 5000/2500	START TRUCK 6200/3100
Technical data			
Maximum current	A	5,000/2,500	6,200/3,100
I-Start	A	1,800/900	2,340/1,170
Charging voltage	V	25.2/14.9	25.2/14.9
Weight	kg	19	23
Order data			
Order number		55072	55070
Instead of RRP excl. VAT		835.00	890.00
RRP excl. VAT		809.00	859.00



START TRUCK 5000/2500

Mobile power stations 12/24 V

START TRUCK 6200/3100 | elmag.eu/55073

START TRUCK 6400/3200 | elmag.eu/55078

- > Switchable 12/24 volt
- > Can be charged using the 230 V mains charger or via the 12 V cigarette lighter
- > Start Truck Trolley models mobile with extendable handle incl. warning signal when polarity is reversed
- > Model 6400/3200 Trolley incl. 7A automatic charger can also be used for vehicle batteries (12 V: 14-225 Ah | 24 V: 14-110 Ah)
- > Incl. integrated LED lighting on the negative pole terminal

Models		START TRUCK 6200/3100	START TRUCK 6400/3200
Technical data			
Maximum current	A	6,200/3,100	6,400/3,200
I-Start	A	2,340/1,170	2,340/1,170
Charging voltage	V	25.2/14.9	25.2/14.9
Weight	kg	32	32
Order data			
Order number		55073	55078
Instead of RRP excl. VAT		1,145.00	1,275.00
RRP excl. VAT		1,109.00	1,235.00



START TRUCK 6200/3100

Hand pallet truck HW 2500 & 1000 series

discount up to
-33%



Our new EL MAG hand pallet truck guarantees safe transport of your goods!

Rubber wheels and polyurethane tandem castors ensure massive noise reduction during transport! The robust stop block at the tip of the fork makes it easy to drive onto pallets! 3 functions of the one-hand lever: Lifting – driving – lowering!

HW-QL 2500

For even greater efficiency, we offer the robust, multi-talented “HW-QL 2500” with a QUICK-LIFT function up to 300 kg, ideal for saving time and energy!

HWN 1000

Our new low-platform manual lift truck offers a load capacity of 1,000 kg and a minimum entry height of just 35 mm. Ideal for effortless transportation of heavy loads with a very low entry height.

Laser-etched marking on forks for optimal position of the pallet truck when driving into the pallet from the side



Models	Load capacity	Fork width A1	Fork length B	Minimum height	Max. lifting height	Dimensions (lxb)	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	mm	kg			
HW 2500	2,500	540	1,150	80	200	1,520 × 540	65	33300	419.00	349.00
HWK 2500	2,500	540	800	80	200	1,170 × 540	62	33301	419.00	349.00
HWL 2500	2,000	540	1,800	80	200	2,170 × 540	90	33302	629.00	499.00
HW-QL 2500	2,500	540	1,150	80	200	1,520 × 540	52	33305	469.00	399.00
HWN 1000	1,000	540	1,150	35	95	1,520 × 540	52	33303	892.00	599.00

Electric hand pallet truck

EHW 1500 | elmag.eu/33310

discount
-15%



Our electric manual lift truck EHW 1500 is a true all-rounder with a load capacity of 1,500 kg. Its low weight and the fast charging time of our Li-ion batteries allow you to use it quickly and effortlessly. It handles the transport of pallets, materials and goods with ease and helps to optimise your material flow.

- > Precise digital LCD display for the battery charge level
- > Excellent manoeuvrability thanks to lateral support rollers for optimum cornering
- > Enjoy up to 8 hours of battery life
- > Charger included for convenient recharging
- > The 24 V/20 Ah Li-ion battery weighs just 4.4 kg
- > Effortless battery change in just one movement

Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
EHW 1500	1,500	540	1150	80	195	123	33310	2,365.00	1,999.00

High lift truck HHW series

Our HHW 1000 & 1025 high lift trucks with an impressive 1,000 kg load capacity and a generous lifting height of 1,600 or 2,500 mm are the ultimate solution for your lifting and transport requirements. Whether you work in warehouses, production plants or other facilities, these lift trucks are the ideal choice. With their remarkable load capacity, you can move heavy loads with ease. The generous lifting height allows you to easily access higher shelves or storage areas.

- > Fork size of 550 × 1,150 mm
- > Rubber swivel castors + PU (polyurethane) tandem castors
- > Foot protection on the swivel castors
- > Foot pedal


 discount
-18%

Models	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
HHW 1000	1,000	550	1,150	85	1,600	220	33321	1,340.00	1,099.00
HHW 1025	1,000	550	1,150	85	2,500	300	33322	1,645.00	1,349.00

Electric cable winch ESW series

Electric cable winches with a 230 volt engine for safe lifting and lowering of various weight classes. Versatile use is possible in workshops, warehouses, etc. The load capacity can be doubled by attaching a double hook!

- > Lifting height 12 metres or 6 metres with double hooks
- > Safe operation via remote control
- > Up and down limiting device
- > Protection class IP 54
- > 230 volt engine with overheating protection


 discount upto
-29%

Models	Lifting force with / without pulley	Lifting speed with / without pulley	Lifting height with / without pulley	Engine power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m/min	m	W	kg			
ESW 250	125/250	10/5	12/6	540	22	33420	157.00	114.90
ESW 600	300/600	10/5	12/6	1,200	34	33421	237.00	169.00
ESW 999	500/990	8/4	12/6	1,600	36	33422	410.00	299.00

Crane scale GKW series

- > Robust aluminium die-cast housing
- > Easy-to-read 38 mm LED display
- > Heavy-duty bow shackle and eye hook
- > Load receptor made of high-quality alloy steel
- > Rechargeable battery with high capacity
- > Incl. remote control


 discount upto
-23%

Models	Max. nominal load	Display steps	Max. overload	Battery run time	Dimensions (l×b×h)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	kg	%	h	mm	kg			
GKW 5000	2,000	1	400	>100	230 × 58 × 420	13	33414	610.00	499.00
GKW 5000	5,000	2	400	>100	230 × 92 × 585	24	33415	777.00	599.00
GKW 10000	10,000	5	400	>100	230 × 94 × 770	43	33416	1,040.00	849.00



Infrared diesel heating unit TURBOHEAT IR 13

discount
-17%

Bring warmth to your workshop, warehouse, etc. – with our robust and efficient infrared diesel heater.

Thanks to thermostat-controlled temperature regulation, the radiant heater works particularly efficiently and automatically ensures constant temperatures. Its compact design and sturdy housing make it ideal for professional use in demanding conditions.

- > Powerful 13 kW heating output – ideal for large, well-ventilated rooms
- > Suitable for diesel or heating oil – maximum flexibility in operation
- > 32-litre tank for long running times
- > Thermostat control – automatic temperature control
- > Compact dimensions: 95 × 30 × 108 cm
- > Easy handling & reliable ignition
- > Robust construction – ideal for continuous use

Models	TURBOHEAT IR 13	
Technical data		
Performance	kW	13
Tank capacity	l	32
Connector plug	-	Schuko
Mains voltage	V	230 / ~1
Order data		
Order number	33240	
Instead of RRP excl. VAT	1,749.00	
RRP excl. VAT	1,449.00	



Gas heaters TURBOHEAT P series

Portable, lightweight and easy-to-handle gas heaters powered by propane/butane gas, perfect for agriculture, construction, etc.

- > Efficient combustion with a high degree of effectiveness, odourless, no smoke
- > Safety shutdown in case of gas/flame/ fan failure and overheating
- > Variable temperature control, manual ignition
- > Stainless steel combustion chamber
- > Comes complete with gas pressure regulator and 1.5 m hose
- > To avoid a lack of oxygen, adequate ventilation must be ensured!

discount upto
-16%

Models		TURBOHEAT P 15		TURBOHEAT P 30		TURBOHEAT P 50	
Technical data							
Performance	kW	15		30		50	
Air output	m³/h	300		600		1000	
Fuel consumption	kg/h	1.07		2.13		3.55	
Mains voltage	V / ~	230 / ~1		230 / ~1		230 / ~1	
Order data							
Order number		33210		33211		33212	
Instead of RRP excl. VAT		208.00		256.00		285.00	
RRP excl. VAT		179.00		219.00		239.00	

Oil/diesel heaters without chimney flue

TURBOHEAT OD Series

- > Direct combustion space heater with very high efficiency for well-ventilated rooms, construction sites, workshops, etc.
- > Robust, compact design
- > Stainless steel combustion chamber
- > Safety shutdown in the event of flame/fan failure and overheating
- > The desired temperature can be easily set using the control dial.
- > All models are mobile.
- > To avoid a lack of oxygen, adequate ventilation must be ensured!



Models		TURBOHEAT OD 20	TURBOHEAT OD 37	TURBOHEAT OD 50	TURBOHEAT OD 60
Technical data					
Performance	kW	20	37	51	63
Air output	m³/h	450	750	1100	1100
Fuel consumption	l/h	1.9	3.9	5	6.1
Tank capacity	l	19	38	50	50
Mains voltage	V / ~	230 / ~1	230 / ~1	230 / ~1	230 / ~1
Order data					
Order number		33220	33221	33222	33223
Instead of RRP excl. VAT		499.00	640.00	761.00	798.00
RRP excl. VAT		399.00	499.00	619.00	649.00

Oil/diesel heaters with chimney flue

TURBOHEAT ODK series

- > Indirect combustion space heaters with chimney flue for enclosed rooms/halls or for heating tents, etc. (when using a hot air hose or exhaust gas ducting)
- > Combustion with very high efficiency
- > Stainless steel combustion chamber
- > Safety shutdown in the event of flame/fan failure and overheating
- > The desired temperature can be easily set using the control dial.
- > Incl. 10 m temperature probe for measuring the room temperature

Optional accessories	Order number	RRP excl. VAT
Outlet adapter for TURBOHEAT ODK 22/32	10064	30.00
Hot air hose 230mm, 10m for ODK 22/32	10065	495.00
Hot air hose 300mm, 10m for ODK 52	10066	495.00



Hot air hose

Models		TURBOHEAT ODK 22	TURBOHEAT ODK 32	TURBOHEAT ODK 52
Technical data				
Performance	kW	20	30	50
Air output	m³/h	750	1100	1400
Fuel consumption	l/h	2	3	5
Tank capacity	l	38	50	50
Exhaust gas connection Ø	mm	110	110	110
Air outlet Ø	cm	23	23	27.5
Mains voltage	V / ~	230 / ~1	230 / ~1	230 / ~1
Order data				
Order number		33230	33231	33232
Instead of RRP excl. VAT		724.00	1,095.00	1,500.00
RRP excl. VAT		599.00	899.00	1,249.00

CURRENT Stockclearance – valid WHILE STOCKS LAST!

PTO power generators – for home and field operation
SEZN-IT/TN series



The PTO power generators from the SEZN IT/TN series generate quality electricity using a tractor's power take-off shaft – an ideal power supply solution for agriculture and forestry, gardening, construction and municipal operations for external operation of electric machines, water and lifting pumps, engines of construction machines, conveyor belts, hay blowers, etc.

In the event of a power failure, the SEZN models also serve as emergency power generators for house and yard, cold rooms, milk cooling, milking, breeding, feeding and heating systems, etc.

The extremely robust implements, protected all around by a tubular frame, can be mounted on the tractor using a three-point hitch. The base frame has integrated supports for pallet trucks and forklifts/front loaders for easy transportation.

TOP highlights


- > Mode selector switch for house and field operation
- > Voltage and power (ampere) display for all 3 phases using a multifunction display module
- > Adjustable frequency, voltage and unbalanced load monitoring (asymmetry)
- > Insulation monitoring 2-stage for field operation – no earth spike required
- > Including AVR control for electronic consumers (e.g. milking robot, feeding systems, etc.)



discount up to
-47%

Models	400 volt		Tractor	PTO shaft	Generator	Voltage control	Protection type	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kVA max.	kVA cont.									
SEZN 20WD-AVR-IT/TN	21.8	19.8	50	430	1,500	AVR	IP44	205	53780	9,100.00	5,000.00
SEZN 30WD-AVR-IT/TN	29.7	27.0	70	430	1,500	AVR	IP44	245	53781	9,600.00	5,120.00
SEZN 35WD-AVR-IT/TN	35.6	32.4	85	430	1,500	AVR	IP44	263	53782	9,875.00	5,230.00
SEZN 45WD-AVR-IT/TN	44.5	40.5	100	430	1,500	AVR	IP44	280	53783	10,170.00	5,450.00
SEZN 50WD-AVR-IT/TN	49.5	45.0	115	430	1,500	AVR	IP44	315	53784	11,170.00	6,555.00
SEZN 80WD-AVR-IT/TN	79.2	72.0	180	400	1,500	AVR	IP44	380	53786	13,740.00	9,550.00
SEZN 90WD-AVR-IT/TN	92.1	83.7	210	400	1,500	AVR	IP44	400	53787	14,185.00	9,875.00

Equipment	Connections for field use			Household use		Shutdown				Voltage monitoring	Frequency monitoring	Unbalanced load monitoring	Multifunctional display	Voltage display (3-phase)	Load display (3-ph)	LED status displays	Three-point suspension	PTO shaft protection
	230 V	400 V		400V /1h		Emergency stop	Overload	Short-circuit THM-SS	Insulation monitor									
	Schuko 16A	CEE 16A-5p	CEE 32A-5p	CEE 63A-5p	CEE 125A-5p													
SEZN 20WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 30WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 35WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 45WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 50WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 80WD-AVR-IT/TN	2	1	1	-	1	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 90WD-AVR-IT/TN	2	1	1	-	1	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES

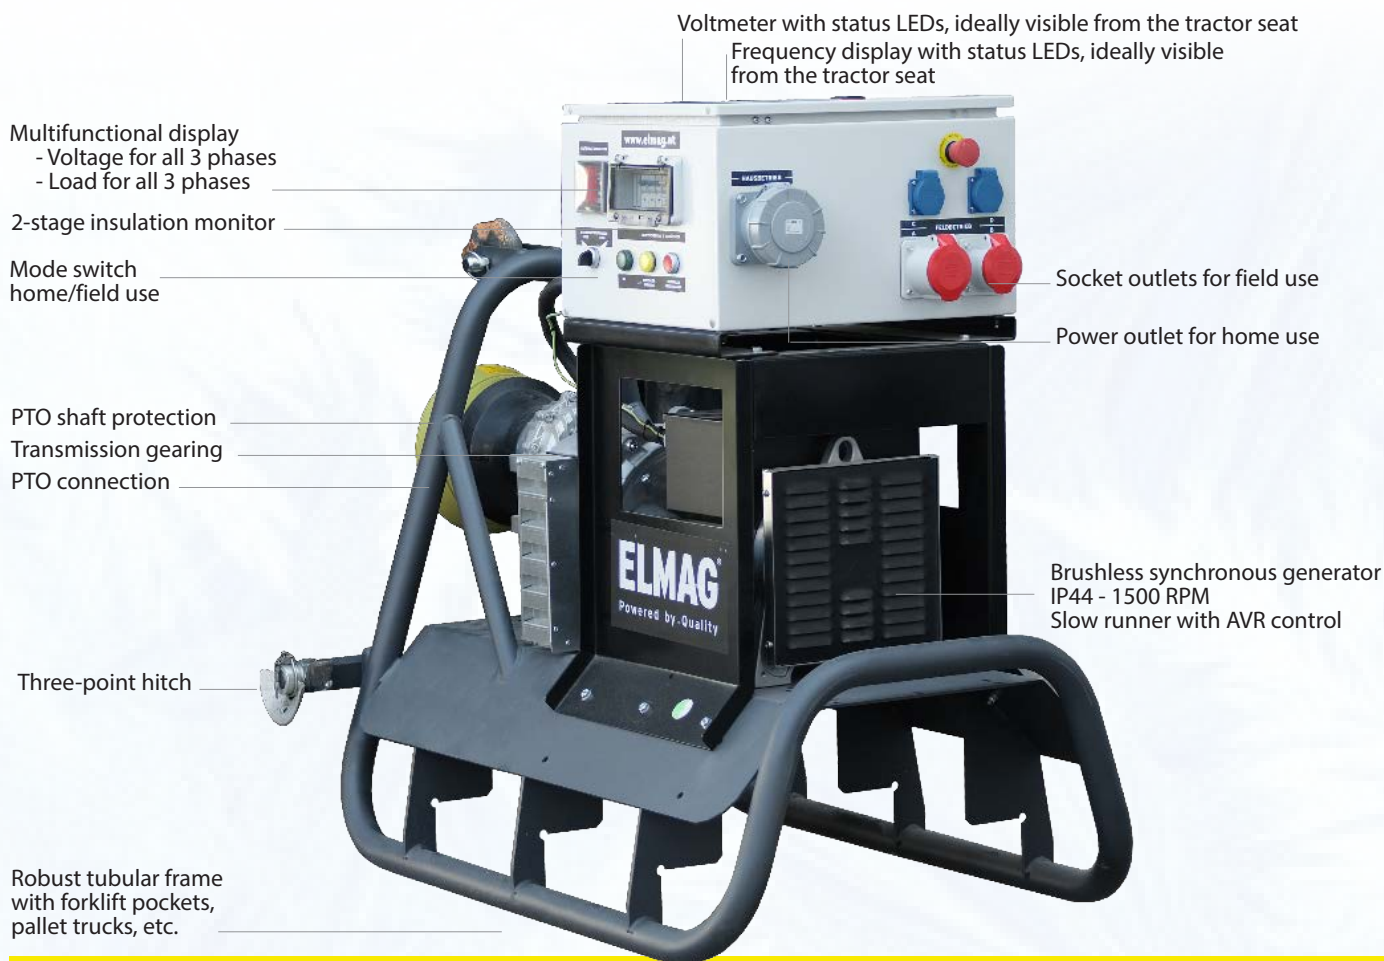

TOP Ergonomics

- > Comprehensive display and safety functions
Traffic light displays for the simplest setting and monitoring
red - yellow - green: for frequency monitoring
red - green: for voltage monitoring and unbalanced load monitoring
- > The displays for the basic settings are ideally visible from the tractor seat
- > Sockets (field operation): 2x Schuko 230 V, 1x CEE 16 A 400 V, 1x CEE 32 A 400 V
- > 1h socket (in-house operation): 1x CEE 63 A 400 V (up to SEZN 50), 1x CEE 125 A 400 V (from SEZN 80)



PTO generators – for domestic use SEZN-ECO series

- > Ideal supply solution for agriculture and forestry
- > Extensive display and safety functions (traffic light display for frequency & voltage)
- > Voltage and power display for all 3 phases via multifunction display module
- > Incl. AVR control for electronic loads (e.g. milking robot, feeding systems, etc.)
- > Adjustable frequency and voltage monitoring
- > 1h socket (in-house operation): 1x CEE 63 A 400 V (up to SEZN 50), 1x CEE 125 A 400 V (from SEZN 65)
- > Information and availability: elmag.eu/order-number



Photo of symbol

Models	400 volt		Tractor min PS	PTO shaft Speed rpm	Generator Speed rpm	Protective type	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kVA max.	kVA cont.								
SEZN 20WD-AVR-ECO	21.8	19.8	50	430	1,500	IP44	205	53790	8,125.00	4,555.00
SEZN 30WD-AVR-ECO	29.7	27.0	70	430	1,500	IP44	245	53791	8,615.00	4,670.00
SEZN 35WD-AVR-ECO	35.6	32.4	85	430	1,500	IP44	263	53792	8,890.00	5,000.00
SEZN 45WD-AVR-ECO	44.5	40.5	100	430	1,500	IP44	280	53793	9,170.00	5,225.00
SEZN 50WD-AVR-ECO	49.5	45.0	115	430	1,500	IP44	315	53794	9,990.00	5,835.00
SEZN 65WD-AVR-ECO	64.4	58.5	145	400	1,500	IP44	350	53795	11,740.00	7,500.00
SEZN 80WD-AVR-ECO	79.2	72.0	180	400	1,500	IP44	380	53796	12,295.00	7,725.00
SEZN 90WD-AVR-ECO	92.1	83.7	210	400	1,500	IP44	400	53797	12,710.00	8,055.00

Portable power station

ENERGY 600 - 2400

discount up to
-47%

For a mains-independent power supply and emergency power supply. Versatile application possibilities: Power tools, chargers, notebook, refrigerator. Whether for camping, at festivals, as a power source for sales stands or as a self-sufficient emergency power solution.

ELMAG power stations – convenient provision for power outages – operation in the home and long storage life without significant self-discharge.

Maintenance-free, super quiet, no exhaust fumes


- > Lithium iron phosphate battery (LIFEPO4) for maximum safety. Long service life and high cycle stability > 2,500 cycles
- > Intelligent battery management system with extensive protection functions against undervoltage, overvoltage, overheating, short-circuiting and overcharging
- > Extensive connection options: 230 V schuko, 12 V DC schuko, USB-A, USB-C, etc.
- > Digital display with detailed status monitoring, integrated MPPT solar charge controller
- > 3 charging options: Solar, 230 V and 12 V, simultaneous charging and discharging possible
- > Integrated LED lighting with SOS function



Portable power station	Continuous performance	Max. power output	Battery		Voltage form	Max. charging power	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	230 Volt 1-phase watt		Type	Capacity Wh						
ENERGY 600	600	1,000	LIFEPO4	595	pure sine	100 W	7	52901	595.00	330.00
ENERGY 1200	1,200	3,600	LIFEPO4	992	pure sine	200 W	11	52902	1,075.00	580.00
ENERGY 1800	1,800	4,000	LIFEPO4	1480	pure sine	400 W	15	52903	1,475.00	790.00
ENERGY 2400	2,400	5,000	LIFEPO4	2232	pure sine	400 W	25	52904	2,125.00	1,135.00

Harness the power of the sun!

discount up to
-45%

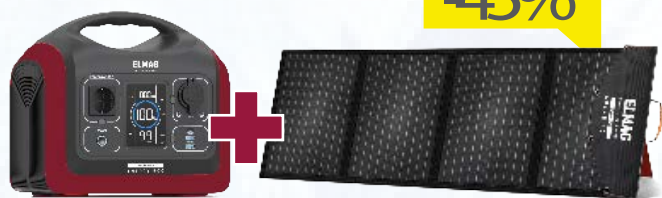

Solar generator set

- > SET includes one power station ENERGY + matching solar panel
- > Fastening points for horizontal/vertical mounting
- > Compact solar panel, with integrated support feet, also for floor installation
- > SOLAR 100 = 1 panel with 100 watt, SOLAR 220 = 1 panel with 220 Watt
- > SOLAR 100 DUO / SOLAR 220 DUO = 2 panels combined, more charging power

Set	Order number	Instead of RRP excl. VAT	RRP excl. VAT
ENERGY 600 + SOLAR 100	00401	840.00	465.00
ENERGY 1200 + SOLAR 100 DUO	00402	1,570.00	860.00
ENERGY 1800 + SOLAR 220	00403	1,960.00	1,070.00
ENERGY 2400 + SOLAR 220 DUO	00404	3,090.00	1,700.00

Solar Panel for ENERGY 600-2400

SOLAR 100 | SOLAR 220

Solar panel	Power Watt	Order number	Instead of RRP excl. VAT	RRP excl. VAT
SOLAR 100	100	52951	245.00	190.00
SOLAR 100 DUO	2 x 100	52952	495.00	380.00
SOLAR 220	220	52953	485.00	370.00
SOLAR 220 DUO	2 x 220	52954	965.00	740.00



SOLAR 220

Diesel generator – emergency power for your detached house SED 7000WD(E)-AVR series

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity.

HATZ four-stroke diesel engine fulfils the EU Stage V emissions standard.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal circuit breaker with switch-off in case of overload
- > WD: Manual start with pull-wire starter WDE: Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version

Diesel power

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices



CURRENT



Models	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled							Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.	Run.	Wt.				
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A			kW	l	l/h 75%Load	h 75%Load	kg				
SED 7000WD-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	95	83	53210	5,150.00	3,120.00
SED 7000WDE-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	110	83	53211	6,420.00	3,740.00

Diesel generator – emergency power for your detached house SED 13500WDE-AVR

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity. Many possible applications thanks to the interchangeable tank system, incl. a multifunction display.

Incl. powerful KOHLER/LOMBARDINI 25LD 425 diesel engine.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version

Diesel power

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices



Model	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled							Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.	Run.	Wt.				
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A			kW	l	l/h 75%Load	h 75%Load	kg				
SED 13500WDE-AVR	13.5	12.7	18	5	4.6	20	Kohler/Lomb. 25LD 425	-	13	20	3	6.7	167	85	53236	7,495.00	4,300.00

Inverter generator

SEBSS 2000Wi & 3000Wi

STAGE **YAMAHA**

Camping, boat and sailing tours, assembly, service and rescue operations, power supply for mobile homes, market stalls and mountain huts – the compact SEBSS inverters are flexible “all-rounders” for independent energy supply.

Extra quiet – thanks to the YAMAHA petrol engine

The sound-insulating plastic housing and the standard ECO automatic function ensure an extremely low noise level and make the devices the ideal companions in noise-sensitive environments.

- > Efficient air cooling, extra quiet – max. 58 - 71 dB(A)
- > Easy handling – recoil start with YAMAHA EasyStart
- > LED status display, protection class IP23
- > Automatic switch-off in case of oil shortage, overload and short-circuit protection
- > ECO automatic, parallel operation possible



Models	230 volt			12 volt	5 volt	Gasoline engine - 50 Hz - Stage 5							Order number	Instead of RRP excl. VAT
	1-phase			DC	USB	Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.		
	kVA max.	kVA cont.	A	A	A	YAMAHA	kW	ccm		l	l/h 75%Load	h 75%Load		
SEBSS 2000Wi	2.1	1.8	8	8.3	2	MZ80	1.8	79	1	4	1	4	53045	1,295.00
SEBSS 3000Wi	3	2.6	11.3	8.3	2	MZ175	3.5	171	1	6	1.5	4	53046	1,740.00

Petrol generator

SEB 3300W(-AVR)

STAGE **HONDA**

Petrol-powered high-speed generators with synchronous generators are the right choice when it comes to the short-term supply of any electrical consumers and power tools. These include lighting systems, boilers, fan heaters, hot plates, power drills, circular saws and chain saws, lawn mowers, water pumps, etc.

A sturdy tubular frame protects the equipment during service, customer service and installation work, as well as during power supply on construction sites, in municipal operations or in agriculture.

- > Original HONDA four-stroke gasoline engine, air-cooled, synchronous generator
- > Thermal circuit breaker with switch-off in case of overload
- > Automatic switch-off in the event of low oil
- > **SEB 3300W-AVR incl. electronic voltage regulation (AVR) for sensitive loads**



Models	230 volt		Petrol engine – 3,000 rpm – 50 Hz – air-cooled – stage 5								Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	1-phase		Type		Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A		kW	ccm		l	l/h 75%Load	h 75%Load	kg	dB(A) @ 7 m			
SEB 3300 W	3	2.7	12	Honda GX 200	3.8	196	1	3.1	1.3	2.4	42	70	53102	1,035.00	520.00
SEB 3300W-AVR	3	2.7	12	Honda GX 200	3.8	196	1	3.1	1.3	2.4	42	70	53190	1,335.00	970.00

Petrol generator – ideal for emergency power, also for heat pumps

SEB 16000WDE-AVR | elmag.eu/53199

HONDA **STAGE** **discount -43%**

Excellent, frequently used high-performance device with 20 l interchangeable tank and fuel-saving ECO automatic idle control. Ideal for use on construction sites, but also as an emergency power supply for buildings with high power requirements (e.g. heat pumps).

- > Socket: 1x 230 V, 1x 400 V, electric start, 75 dB(A) on 7 m
- > Incl. operating hours counter, automatic idling & thermal magnetic circuit breaker
- > Incl. electric start system and maintenance-free battery

TOP highlights

- > **Ideal as an emergency power supply due to 3-phase electronic AVR control**
- > **50% more unbalanced load capacity than comparable devices!**
- > **20 litre tank, 5 l/h consumption (at 75% load) – interchangeable tank system**
- > **Original HONDA GX 690 petrol engine, air-cooled – stage V**



Model	400 volt			230 volt			Petrol engine – 3,000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm		l	l/h 75%Load	h 75%Load					
SEB 16000WDE-AVR	16	14.4	21	5.8	5.3	23	GX 690	15	688	2	20	5	4	154	75	53199	5,570.00	3,150.00

Petrol generator SEB(S) WD(E)/(25)-AVR series

discount UPTO
-24%

Models	400 V	230 V	3,000 rpm – air-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	Honda	Stage	l	l/h 75%Load				
SEBS 7500WD	8	3.8	GX 390	5	25	2.8	106	53152	3,690.00	2,815.00
SEBS 7500WDE	8	3.8	GX 390	5	25	2.8	113	53153	4,375.00	3,315.00
SEB 13500WDE	13.5	5	GX 630	5	20	4.2	149	53198	4,945.00	3,875.00
SEB 18000WDE	17.5	5.8	iGX 800	5	20	5.6	165	53194	6,440.00	4,965.00



CURRENT

Petrol/diesel generator SE(B/D)SS WDE-AVR series

discount UPTO
-28%

Models	400 V	230 V	3,000 rpm – air-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	Stage 5		l	l/h 75%Load				
SEBSS 6500WDE	7	2.5	Honda GX 390		20	2.4	150	53144	7,925.00	5,990.00
SEBSS 12000WDE	12	4	Honda GX 630		20	4.2	204	53147	9,315.00	6,750.00
SEBSS 15000WDE	15	6	Honda GX 690		20	5	224	53148	10,770.00	8,690.00
SEDSS 7000WDE	7	3.8	Hatz 1B40		20	1.9	200	53226	11,815.00	9,500.00



Diesel generator SEDSS WDE-AVR-DSE4520-V2 series

discount UPTO
-25%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	l	l/h 75%Load				
SEDSS 113WDE	11	3.8	D722	5	58	2.5	345	00751	15,595.00	11,900.00
SEDSS 133WDE	13.5	5	D902	5	58	3.3	360	00752	16,395.00	12,900.00
SEDSS 183WDE	18	6.8	D1105	5	63	3.9	450	00753	17,990.00	13,625.00
SEDSS 243WDE	24	8.8	V1505	-	73	5	572	00754	20,910.00	15,625.00



Diesel generator SEDSS WDE-AVR-DSE4520-V2 series

discount UPTO
-26%

Models	400 V	230 V	1,500 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	l	l/h 75%Load				
SEDSS 14WDE	14	4.8	D1703M	5	73	2.6	580	00756	20,000.00	14,750.00
SEDSS 20WDE	19	6.8	V2203M	5	80	3.7	660	00757	23,200.00	18,200.00
SEDSS 34WDE	33	11.6	V3300	3 A	90	6	870	00758	26,850.00	21,200.00
SEDSS 44WDE	44	15.4	V3800DIT	3 A	90	7.7	925	00759	28,125.00	21,900.00



Emergency power package SEDSS WDE-ASS series

discount UPTO
-37%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	l	l/h 75%Load				
SEDSS 113WDE	11	3.8	D722	5	58	2.5	345	00543	19,675.00	12,450.00
SEDSS 133WDE	13.5	5	D902	5	58	3.3	360	00545	20,570.00	13,950.00
SEDSS 183WDE	18	6.8	D1105	5	63	3.9	450	00547	22,725.00	14,450.00
SEDSS 243WDE	24	8.8	V1505	3 A	73	5	572	00549	25,795.00	16,950.00



Emergency power package SEDSS WDE-ASS series

discount UPTO
-27%

Models	400 V	230 V	1,500 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	l	l/h 75%Load				
SEDSS 20WDE	19	6.8	V2203M	5	80	3.7	660	00551	27,340.00	19,990.00
SEDSS 34WDE	33	10.9	V3300	3 A	90	6	870	00554	31,000.00	23,990.00
SEDSS 44WDE	44	15.4	V3800 DIT	3 A	90	7.7	925	00553	34,155.00	26,990.00



Photo
of symbol

Petrol generator – emergency power for your detached house

SEB 7500WD(E)-AVR

400/230 volt frame device for commercial use in construction, for service work and agriculture, as well as for private emergency power supply.

With AVR control for sensitive consumers and high unbalanced load capacity thanks to oversized generator.

Tip: Increased unbalanced load capacity – ideal for emergency power

- > Automatic switch-off in the event of low oil
- > Manual launch - Stage V
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Socket: 1x 230 V, 1x 400 V, 72 dB(A) at 7 m
- > SEB 7500WDE-AVR incl. electric start system and maintenance-free starter battery

TOP highlights

- > Original HONDA GX390 four-stroke gasoline engine, air-cooled
- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices!



Our top seller!

Models	400 volt			230 volt			Petrol engine – 3,000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm		l	l/h 75%Load	h 75%Load					
SEB 7500WD-AVR	8	7.2	10	3.8	3.4	14.4	GX 390	8.2	389	1	6.1	2.8	2.2	91	72	53196	2,955.00	1,490.00
SEB 7500WDE-AVR	8	7.2	10	3.8	3.4	14.4	GX 390	8.2	389	1	6.1	2.8	2.2	103	72	53197	3,720.00	2,625.00

ELMAG®
Powered by Quality

WHO IS ELMAG?

- > Family business with 70 employees from Ried im Innkreis, Upper Austria
- > High-quality machines for compressed air, welding, metalworking, workshop technology and power generation
- > Available from specialised dealers for tools, machines and electrical engineering
- > Service: Professionally trained service team, on-site service for large machines
- > For 40 years: unique, trusting and appreciative corporate culture

QUALITY FROM AUSTRIA



Quality: No compromises

High-quality, robust devices with well-known and tried-and-tested engines and generators that you can rely on in an emergency.

Service that convinces

We emphasise simple operation and maintenance. Our service team will provide you with fast and competent support, including on site for large machines or commissioning.

Safety and reliability

All ELMAG products fulfil the latest safety requirements. You receive a 2-year warranty, 3 years upon registration and at least 15 years spare parts supply.

