

Highlights

valid until
October
2026

V-belt drilling machine SET KBM 15 T Vario | elmag.eu/16083

DISCOUNT
-13%

- > Control lever for speed adjustment
- > Speed adjustment by means of variator disc
- > Telescopic chuck protection CE
- > Incl. laser drill indicator & keyless drill chuck

Model	15 T Vario	
Technical data		
Drilling capacity in steel	mm	15
Spindle holder	MK	MK2
Speed range	rpm	440-2,600
Speed steps	-	variable
Quill stroke	mm	60
Column diameter	mm	59.5
T-groove width	mm	14
Spindle projection	mm	130
Quill distance from table	mm	300
Motor power	W	500
Mains connection	V/Hz	230 / 50-60
Weight	kg	32

INSTEAD OF PRICE EXCL. VAT
~~380.-~~

330.-

+ Now included in the SET!

Machine vice 3" / 75
and 2 tensioning screws T12 mm



Whisper compressor WHISPER 135/8/24 W | elmag.eu/21219

- > Very quiet – 59 dB(A)
- > High-quality DIY compressor
- > Oil-free 2-cylinder unit with low speed of 1,400 rpm
- > Easy to manoeuvre and lightweight
- > Container volume 24 litres, 8 bar
- > Incl. pressure switch, pressure regulator as standard, with pressure gauge and quick-release coupling

Model	WHISPER 135/8/24 W	
Technical data		
Effective delivery rate	l/min	70
Suction capacity	l/min	135
Operating pressure max.	bar	8
Oil-lubricated	-	No
Container volume	l	24
Rated power	kW / HP	0.75/1
Voltage / frequency	V / Hz	230/50
Sound pressure level (4 m)	dB(A)	59
Rotational speed compressor	rpm	1,400
Dimensions (l×w×h)	mm	560 × 310 × 560
Weight	kg	22



INSTEAD OF PRICE EXCL. VAT
~~179.-~~

169.-

3 ELMAG®
WARRANTY
AT A ONLINE-
REGISTRATION
www.elmag.eu/3years



INSTEAD OF PRICE EXCL. VAT
~~212.-~~

DISCOUNT
-20%

169.-

Compressor

EUROAIR 220/8/24 W | elmag.eu/10006

- > High-quality DIY compressor
- > 1-cylinder unit, lubricated, 2,850 rpm
- > Boiler capacity 24 litres, 8 bar
- > Suction capacity 222 l/min, delivery capacity 122 l/min (at 6 bar)
- > 230-volt motor, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling



INSTEAD OF PRICE EXCL. VAT
~~225.-~~

219.-

Compressor

WERKER 275/10/50 W | elmag.eu/10014

- > 1-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 275 l/min, delivery capacity 115 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230-volt motor, 2.5 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



INSTEAD OF PRICE EXCL. VAT
~~289.-~~

279.-

Compressor

WERKER 365/10/50 W | elmag.eu/10099

- > 2-cylinder DIY compressor, lubricated
- > Direct drive with 2,850 rpm
- > Suction capacity 365 l/min, delivery capacity 155 l/min (at 8 bar)
- > Boiler capacity 50 litres, 10 bar
- > 230-volt motor, 3 HP output
- > Pressure reducer for variable pressure regulation
- > 2 rubber buffers for high stability
- > Pushbutton switch for automatic on/off operation
- > "Plug and play" equipment with quick-connect coupling



INSTEAD OF PRICE EXCL. VAT
~~179.-~~

169.-

Whisper compressor

WHISPER 110/8/8 W | elmag.eu/21217

- > Very quiet - 56 dB(A)
- > High-quality DIY compressor
- > Oil-free 2-cylinder unit with low speed of 1,400 rpm
- > Portable, light and easy to handle (17 kg)
- > Container volume 8 litres, 8 bar
- > Suction capacity 110 l/min, delivery capacity 55 l/min
- > 230 volt engine, 0.75 HP output
- > Incl. pressure switch, pressure regulator as standard, with pressure gauge and 2 quick-release couplings

Compressors

EUROAIR series

- > Basic professional class model
- > Boiler capacity 50 litres, 10 bar
- > 230/400 volt engine, 3 HP power
- > Lubricated 2-cylinder units
- > The low speeds of ONLY 1,100 to max. 1,570 RPM ensure high duty cycle, long service life and smooth running.
- > **Complete with filter pressure reducer and CONDOR pressure switch, motor protection, ball valve for condensate drainage, 2 Euro couplings**



Made
in
Italy

COMPRESSED AIR

**EUROAIR
340/10/50 W**

Models	Effective delivery rate l/min	Suction capacity l/min	Operating pressure max. bar	Oil-lubricated	Container volume l	Electric motor		Sound pressure level (4 m) dB(A)	Rotational speed compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	Voltage/frequency HP V/Hz						
EUROAIR 340/10/50 W	215	330	10	●	50	2.2	3 230/50	76	1,570	53	10252	699.00	665.00
EUROAIR 340/10/50 D	215	330	10	●	50	2.2	3 400/50	76	1,570	51	10253	735.00	699.00
EUROAIR 480/10/50 W	315	470	10	●	50	2.2	3 230/50	77	1,100	53	10254	755.00	719.00
EUROAIR 480/10/50 D	315	470	10	●	50	2.2	3 400/50	77	1,100	55	10255	820.00	780.00

Compressors

BOY series

- > The compressor for professional construction site use
- > Oil-free special compressors with innovative technology
- > Solid rubber wheels Ø 210 mm for flexible, safe use
- > Virtually maintenance-free
- > Compact design, also ideal for car transport
- > BOY 330/10/20 W with remarkable duty cycle due to extremely low engine/unit speed of ONLY 1,350 rpm, 3-cylinder unit
- > BOY 460/10/20 W: High speed (2,700 rpm) – therefore high air output, 2-cylinder unit
- > **Incl. CONDOR pressure switch, ELMAG filter pressure reducer & 2 safety venting couplings as standard**



FREE NOW!
 "High-flex" compressed air
 hose SET 10 m, 8 x 13 mm



Made
in
Italy

BOY 330/10/20 W

Models	Effective delivery rate l/min	Suction capacity l/min	Max. operating pressure bar	Container volume l	Electric motor		Sound pressure level (4 m) dB(A)	Rotational speed compressor rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
					Rated power kW	Voltage/frequency HP V/Hz						
BOY 330/10/20 W	200	332	10	20	2.2	3 230/50	69	1,350	37	21230	1,102.00	999.00
BOY 460/10/20 W	240	460	10	20	1.8	2.5 230/50	75	2,700	34	21232	927.00	875.00



Compressors

MEISTER 620/10/90 D | elmag.eu/10232

MEISTER-Z 620/10/90 D | elmag.eu/10262

MEISTER-H 615/14/90 D | elmag.eu/10280

- > All-round compressor for versatile professional use, 2-cylinder unit, 2-stage compression
- > Low-speed motor, speed 1,480 and 1,200 rpm
- > Boiler capacity 90 litres, 10 or 14 bar, 400 volt engine, 4 HP
- > Suction capacity 549 or 495 l/min,
- > Flow rate: 389 or 289 l/min (at 8 or 11 bar)
- > Complete with filter pressure reducer, Condor pressure switch, 2 Euro quick-connect couplings as well as PVC/solid rubber wheels and swivel castors with brakes!
- > MEISTER-H: Up to 14 bar maximum pressure (lorry tyres)
- > **Possible variant MEISTER-Z: With a DL container hot-dip galvanized inside and outside - 15-year rust-through guarantee**

Models	Effective delivery rate l/min	Suction capacity l/min	Operating pressure max. bar	Oil-lubricated	Container volume l	Electric motor			Sound pressure level (4 m) dB(A)	Rotational speed rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	HP	Voltage/frequency V/Hz						
MEISTER 620/10/90 D	389	549	10	●	90	3.0	4.0	400/50	77	1,480	77	10232	1,125.00	1,065.00
MEISTER-Z 620/10/90 D	389	549	10	●	90	3.0	4.0	400/50	77	1,480	78	10262	1,299.00	1,235.00
MEISTER-H 615/14/90 D	289	495	14	●	90	3.0	4.0	400/50	77	1,200	81	10280	1,395.00	1,325.00



Compressors

MEISTER 710/10/90 D | elmag.eu/10233

MEISTER 710/10/200 D | elmag.eu/10234

MEISTER-H 715/14/90 D | elmag.eu/10281

- > All-round compressor for versatile professional use, 2-cylinder unit, 2-stage compression
- > Low-speed motor, speed 1,370 and 1,150 rpm
- > Boiler capacity 90 or 200 litres, 400 volt engine 5.5 HP
- > Suction capacity 670 or 550 l/min, Flow rate: 490 or 325 l/min (at 8 or 11 bar)
- > MEISTER-H: Up to 14 bar maximum pressure (lorry tyres)
- > Complete with filter pressure reducer, Condor pressure switch, 2 Euro quick-release couplings, PVC/solid rubber wheels and swivel castors with brakes!



DISCOUNT UP TO
-11%

Models	Effective delivery rate l/min	Suction capacity l/min	Operating pressure max. bar	Oil-lubricated	Container volume l	Electric motor			Sound pressure level (4 m) dB(A)	Rotational speed rpm	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
						Rated power kW	HP	Voltage/frequency V/Hz						
MEISTER 710/10/90 D	490	670	10	●	90	4.0	5.5	400/50	77	1,370	87	10233	1,465.00	1,399.00
MEISTER 710/10/200 D	490	670	10	●	200	4.0	5.5	400/50	77	1,370	117	10234	1,665.00	1,590.00
MEISTER-H 715/14/90 D	325	550	14	●	90	4.0	5.5	400/50	77	1,150	91	10281	1,870.00	1,665.00

Compressors PROFI-LINE series

- > High-performance piston compressor for professional use, 2-cylinder unit, 2-stage compression
- > Unit speed ONLY 1,150 rpm: Long service life, low noise
- > Complete with CONDOR pressure switch with operating hours counter & safety vent coupling
- > 200 l version: Includes filter pressure regulator 1/2", rubber wheels & swivel castors with brakes
- > 270 l version: Includes vibration damper, air outlet in ball valve

FREE NOW!

Automatic condensate drain
AKA 1/2", 230 volt

Functionality:



PL 840/10/200 D

DISCOUNT UP TO
-19%

Made
in
Italy

COMPRESSED AIR

Models	Effective delivery rate	Suction capacity	Max. operating pressure	Oil-lubricated	Container volume	Electric motor			Sound pressure level (4 m)	Rotational speed compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar		l	Rated power		Voltage/frequency						
						kW	HP	V/Hz	dB(A)	rpm	kg			
PL 840/10/200 D	595	850	10	●	200	5.5	7.5	400/50	76	1,150	160	11022	2,576.50	2,249.00
PL 840/10/270 D	595	850	10	●	270	5.5	7.5	400/50	76	1,150	185	11024	2,760.50	2,249.00

PROFI-LINE SILENT high-performance compressor PLS 750/10/270 D | elmag.eu/10125

- > Highly effective sound insulation – noise level ONLY 68 dB(A)!!
- > Complete unit incl. 270-litre compressed air container, max. 10 bar (no TÜV approval required in Austria)
- > 2-cylinder unit, 2-stage compression
- > Centralised condensate drainage from both CA containers
- > Suction capacity 750 l/min, delivery capacity 563 l/min (at 8 bar)
- > 400 volt engine 4 kW, 5.5 HP
- > Extremely low unit speed of ONLY 1,000 rpm
- > Vibration-free due to vibration buffer
- > Included as standard: Operating hours counter, vibration damper ball valve for compressed air outlet 1/2"
- > Optionally available:
MDX 1200 refrigeration dryer package elmag.eu/00900
(RRP: €1,375.- excl. / €1,636.25 incl. 19% VAT)

FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



elmag.eu/00900

INSTEAD OF PRICE EXCL. VAT
4,176.50
DISCOUNT -10%
3,749.-

Made
in
Italy





Made
in
Italy

PROFI-LINE SILENT high-performance compressor

PLS 500/10/24+100 D | elmag.eu/10130

- > Highly effective sound insulation – noise level ONLY 67 dB(A)!!!
- > 2-cylinder unit, 2-stage compression
- > Cooling fan for forced cooling
- > Two CA containers 100+24 litres, max. 10 bar
- > Centralised condensate drainage from both CA containers
- > Suction capacity 520 l/min, delivery capacity 370 l/min (at 8 bar)
- > 400 volt engine 3 kW, 4 HP
- > Low unit speed of ONLY 1,450 rpm
- > Vibration-free due to vibration buffer
- > **Included as standard: Operating hours counter & ball valve for compressed air outlet 1/2"**



FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



INSTEAD OF PRICE EXCL. VAT
~~2,460.50~~

DISCOUNT
-12%

2,170.-



Made
in
Italy

MARK screw compressor

MSM 7.5D/10/270 | elmag.eu/12147

- > Fully automatic INDUSTRIAL screw compressor for continuous operation over several hours
- > Effective delivery rate 1,134 l/min at 10 bar
- > Container volume 270 litres (no TÜV approval required in AT)
- > Rated power 7.5 kW, IE3 motor, 400 volt
- > With built-in MDX refrigerant dryer and automatic condensate drainage (the DL container is already dry)
- > Air/oil cooler
- > Soundproofed with ONLY 66 dB(A) – very quiet
- > ES4000S Intelligent Control System



FREE NOW!

MK5 Touch Control
Clear information
on a 4.3-inch colour touchscreen

INSTEAD OF PRICE EXCL. VAT
~~8,317.-~~

7,549.-



Automatic hose reel

ROLL AIR PROFI 15 | elmag.eu/00820

Made
in
Italy

- > Robust, impact-resistant design
- > 15 m PU hose 8 × 12 mm, max. 15 bar
- > 2 m long connection hose
- > Swivel joint with anti-kink spring
- > Swivelling steel wall bracket
- > Incl. steel coupling JWL, NW 7.8
- > Maximum safety thanks to automatic 'SLOW MOTION' return brake



'SLOW MOTION' return brake

INSTEAD OF PRICE EXCL. VAT
~~270.-~~
DISCOUNT -12%
239.-



COMPRESSED AIR

Automatic hose reel

ROLL AIR MEGA 20 | elmag.eu/42193

Made
in
Italy

- > Robust, impact-resistant design
- > 20 m PU hose 10 × 15 mm, max. 15 bar
- > 2 m long connection hose
- > Swivel joint with anti-kink spring
- > Swivelling steel wall bracket
- > Incl. steel coupling & steel nipple JWL, NW 7.8

INSTEAD OF PRICE EXCL. VAT
~~349.-~~
DISCOUNT -14%
299.-



DL hose reel

EURODRUM AIR 20 | elmag.eu/42199

- > Ideal for all installation work
- > Key benefits: Large hose diameter: 10 × 15 mm
- > Manual compressed air hose reel with a polyurethane (PU) compressed air hose up to 20 m long
- > 360° swivel base – preventing it from tipping over when rolling
- > Swivel joint on the connecting hose, fold-away hand crank
- > Quick-release coupling and plug-in nipple with kink protection
- > High-quality PU ether hoses:
 - Highly flexible (even in cold conditions)
 - 3 times longer service life
 - Increased resistance to moisture and chemicals

INSTEAD OF PRICE EXCL. VAT
~~185.-~~
DISCOUNT -25%
139.-



Automatic cable reel

ROLL ELECTRIC JUNIOR 230 | elmag.eu/00821

Made
in
Italy

- > Load capacity unrolled: max. 2,000 W
- > TÜV & GS tested
- > Thermal overload protection
- > 10 m cable length, 230 volt, 3 × 1.5 mm²
- > Maximum safety thanks to automatic 'SLOW MOTION' return brake



'SLOW MOTION' return brake

INSTEAD OF PRICE EXCL. VAT
~~223.-~~
DISCOUNT -24%
169.-





ROLL WATER EVO 20/13



ROLL WATER MEGA 20/16

Automatic water hose reel ROLL WATER series

DISCOUNT UP TO
-11%

Made
in
Italy

- > The **ORIGINAL** from Italy!
- > Incl. original GARDENA starter set
- > Impact and UV-resistant plastic housing incl. sturdy wall bracket, 1 m connection cable
- > Blocking device can be switched off
- > Ordered return due to layer winding mechanism
- > Strong return springs made of spring steel "Made in Germany"



Models	EVO 20/13	MEGA 30/13	MEGA 20/16
Technical data			
Hose quality	PVC	PVC	PVC
Hose diameter	Inch 1/2 (11 mm)	1/2 (11 mm)	5/8 (15 mm)
Hose length	m 20	30	20
Length of supply cable approx.	m 1	1	1
Temperature max.	°C 40	40	40
Operating pressure max.	bar 6	6	6
Weight	kg 9.8	12.7	12
Order data			
Order number	42265	42266	42267
Instead of RRP excl. VAT	212.00	287.00	287.00
RRP excl. VAT	189.00	265.00	265.00



Made
in
Italy

INDUSTRIAL hose reel

4432/32 – SET | elmag.eu/43023

FOR HIGH-PRESSURE CLEANERS

- > For water (max. 130°C), 200 bar
- > Drum/holder: ABS plastic/stainless steel AISI 304
- > Swivel joint: Stainless steel AISI 304
- > 18 m HP hose: 3/8" (9.5 × 17 mm)
- > With swivelling bracket 40° left/right and 60 cm hose supply cable + 3 m HP connection hose & intermediate adapter to lance as standard for Kärcher/Kränzle
- > Field of application: Workshops, agriculture
- > **5-year WARRANTY**

INSTEAD OF PRICE EXCL. VAT
~~787.50~~
DISCOUNT -11%
699.-



Automatic hose reel

EUROREEL AIR OPEN 15 S | elmag.eu/42297

- > 15 m PU ether hose 10 × 15 mm, 20 bar
 - Highly flexible (even in cold conditions)
 - 3 times longer service life
 - Increased resistance to moisture and chemicals
- > Robust metal housing incl. swivelling wall or ceiling suspension
- > Incl. 3 m hose supply cable
- > High-quality connection coupling and plug nipple are fitted as standard

INSTEAD OF PRICE EXCL. VAT
~~227.-~~
DISCOUNT -12%
199.-

Automatic hose reel ROLL WATER EURO 25/11

elmag.eu/42268

ROLL WATER EURO 25/11 automatic hose reels make an important contribution to accident prevention on construction sites, in garages and workshops, in agriculture and in horticulture.

A dream for professional and amateur gardeners:

- > Quick tidying up of the garden or workplace
- > Prevention of tangling and wear of the hose
- > Housing made of impact-resistant, UV-resistant plastic
- > Easy release of the locking device by pulling the water hose
- > Strong return springs made of spring steel and integrated carrying handle
- > Ordered return due to layer winding mechanism
- > Comes with a swivelling wall mount as standard

ROLL WATER		EURO 25/11
Technical data		
Hose quality		PVC
Hose diameter	Inch	1/2 (11 mm)
Hose length	m	25
Length of supply cable approx.	m	0.9
Temperature max.	°C	40
Operating pressure max.	bar	5
Weight	kg	11

INSTEAD OF PRICE EXCL. VAT
~~127.-~~
DISCOUNT -22%
99.-



WHILE STOCK LASTS!

COMPRESSED AIR

Automatic industrial reels INDUSTRIE 530/12, 540/12, 4430/11 & 4430/13

- > Extremely robust and professionally designed hose reels for industrial use, open design
- > 5-year WARRANTY
- > Models 530/12 & 540/12: Frame and drum made of painted sheet steel
Models 4430/11 & 4430/13: Frame made of ABS plastic and drum made of painted sheet steel
- > Locking device, stable wall/ceiling mounting, swivel mechanism and 60-cm connecting hose are standard features.
- > Adjustable arm for optimal alignment during wall and ceiling mounting
- > Extremely strong, durable springs made of special steel guarantee even and complete return
- > Tested for approx. 25,000 full cycles
- > Rubber hose with galvanised connectors
- > Large hose dimensions for models 530/12 & 540/12

All industrial reels on this page are explosion-proof
-> according to ATEX 94/9



FOR COMPRESSED AIR & COLD WATER (20 BAR)

Made in Italy



INDUSTRIE 530 & 540

INDUSTRIE 4430

5 YEARS
REEL GUARANTEE



Models	Hose quality	Hose dimension	Hose length	Inlet connection	Outlet connection	Max. working pressure	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		Ø ID x OD mm	m	Inch	Inch				
INDUSTRIE 530/12	GI	12.7 x 20	25	IG 1/2"	AG 1/2"	20	43005	781.00	739.00
INDUSTRIE 540/12	GI	19 x 26.5	20	IG 1"	AG 3/4"	20	43000	1,085.00	1,029.00
INDUSTRIE 4430/11	GI	12.7 x 20	15	IG 1/2"	AG 1/2"	20	43131	512.00	499.00
INDUSTRIE 4430/13	GI	9.5 x 16	20	IG 1/2"	AG 3/8"	20	43133	512.00	499.00



Automatic welding screen

MultiSafeVario® L-TC | elmag.eu/56381

- > For all common welding processes, also for TIG > 5 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 520 g
- > Top marks for classification: 1/1/1/1, shutter speed: 0.05 ms
- > Viewing window: 98 × 43 mm
- > Sanding mode, replaceable backup battery
- > **Improved headband, ergonomic helmet shell**
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**
- > **Optionally available: Dioptre disc insert**

INSTEAD OF PRICE EXCL. VAT
~~52.50~~

DISCOUNT
-18%

42.90



2XL-TC art | elmag.eu/59370

2XL-TC eagle | elmag.eu/59371

2XL-TC flame | elmag.eu/59372



Automatic welding helmets

MultiSafeVario® 2XL-TC

- > For all common welding processes, also for TIG > 5 A
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 16321 ELMAG W4 / 9-13 V1 CE
- > Shutter speed: 0.05 ms
- > Large viewing windows: 98 × 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**
- > **Optionally available: Dioptre disc insert**

INSTEAD OF PRICE EXCL. VAT
~~99.-~~

DISCOUNT
-24%

75.50



Automatic welding screen

MultiSafeVario® PREMIUM-TC | elmag.eu/58380

- > For all common welding processes, also for TIG > 3 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Variable protection level 4-9 & 8-13, internal controls**
- > Adjustable brightening delay 0.3 ~ 0.9 s
- > 4 light sensors, weight: 460 g
- > Top marks for classification 1/1/1/1, shutter speed: 0.033 ms
- > Extra-large viewing window: 100 × 65 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**
- > **Optionally available: Dioptre disc insert**

INSTEAD OF PRICE EXCL. VAT
~~119.-~~

DISCOUNT
-16%

99.90



Automatic welding helmets

MultiSafeVario® PREMIUM-TC series
Helmet shell with your logo! (from 48 pcs.)

DISCOUNT
-16%

Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
PREMIUM-TC grey	59376	119.00	99.90
PREMIUM-TC blue	59377	119.00	99.90
PREMIUM-TC red	59378	119.00	99.90

"Strengthen YOUR brand: YOUR logo will leave a lasting impression on YOUR customers!"

ECO exhaust air sets

- > Fast working possible due to particularly flexible adjustment with just one hand
- > 40% less adjustment of the extraction arm needed thanks to the flow-optimised design of the hood
- > Holds the set position self-supporting through internal support linkage with spring assistance
- > Compact solution for welding stations with direct outdoor discharge
- > Scope of application: Large amounts of smoke/dust, continuous use, welding fumes, gases, vapours, light dusts
- > For wall mounting or on columns

Models	Connection	Extraction capacity with arm	Motor power	Noise level	Pipe Ø	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	Volt	m³/h	watt	dB(A)	mm	kg			
ECO 2 m exhaust air set	400	1,100	750	63.5	150	39.5	57553	1,695.00	1,609.00
ECO 3 m exhaust air set	400	1,100	750	63.5	150	43.5	57554	1,785.00	1,695.00
ECO 4 m exhaust air set	400	1,100	750	63.5	150	48	57555	1,875.00	1,779.00



WELDING

Extraction systems, mobile

SMART MASTER series

- > Compact basic device for sporadic smoke extraction, 230 volt
- > Rotating & swivelling extraction hood 360°
- > Three-stage filter (filter area 13 m²)
- > Extraction capacity with arm 950 m³/h
- > Noise level: 72 dB(A)


Arm length 2 m
W3/IFA tested
elmag.eu/58600

INSTEAD OF PRICE EXCL. VAT
~~1,946.-~~
DISCOUNT -10%
1,749.-

Arm length 2 m
H13 AT edition
elmag.eu/58650

INSTEAD OF PRICE EXCL. VAT
~~2,036.-~~
DISCOUNT -10%
1,835.-

Product video:



FREE NOW!

10 pre-filter mats



NOTE: ELMAG® offers the SMART-MASTER mobile suction units in two versions!

Selection criteria	Austria	Germany
Sufficient authorisation for standard welding fumes (without carcinogenic substances)	W3/IFA approval	W3/IFA approval
Required authorisation for carcinogenic substances (e.g. welding fumes for stainless steel or brass welding work)	H13 AT Edition (HEPA filter according to GKV 2011, Section 15)	W3/IFA approval

Extraction systems, mobile

SMART-FIL series

- > Designed for frequent use in commercial and industrial applications
- > Rotatable and swivelling 360° suction hood, including a push handle and cable holder
- > Thanks to the special design of the hood, the extraction arm requires less repositioning
- > Enhanced safety through acoustic filter monitoring and contamination-free filter replacement
- > Extraction capacity with arm: 1,100 m³/h, motor power: 1.5 kW, 400 V, weight: 131 kg
- > W3/IFA-certified, noise level 70 dB(A)
- > High cost-effectiveness thanks to high capacity and long filter service life (filter area 25 m²)
- > Safe operation thanks to rotating field detection
- > NOW NEW: Optional H13 after-filter for Smart-FIL
elmag.eu/58706 (RRP: €315- excl. / €374.85 incl. 19% VAT)

Arm length 3 m
W3/IFA tested
elmag.eu/58701

INSTEAD OF PRICE EXCL. VAT
~~3,125.-~~
2,969.-

Arm length 4 m
W3/IFA tested
elmag.eu/58702

INSTEAD OF PRICE EXCL. VAT
~~3,215.-~~
3,055.-



H13 after-filter



Product video:



DISCOUNT UP TO
-20%



EUROMIGplus 254

MIG/MAG gas-shielded arc welding systems

EUROMIG^{plus}

- > Compact design with clear, ergonomically arranged control panel
- > Powerful feed units with 2-roller drive, with 3 m hose package length as standard
- > From model EM 204: Main transformers with copper winding, 2-cycle, 4-cycle, spot & interval welding function, EM 174 only 2-cycle & spot welding function

Models		EM 174	EM 204	EM 254
Material thickness	mm	0.5-6	0.5-8	0.5-10
Welding current setting range	A	35-120 90-165	15-200	25-250
Welding current switching stages	No.	6	10	10
Steel/stainless steel wire diameter	mm	0.6-0.8	0.6-1.0	0.6-1.2
Duty cycle at 40 °C	% / A	100/47 100/47	100/100	100/130
Duty cycle at max. welding current	% / A	10/120 10/165	20/200	20/250
Feed drive	Rollers	2	2	2
Original BINZEL hose package	MB	EVO 15/3 m	EVO 15/3 m	EVO 25/3 m
Mains voltage / fuse protection	V / A	230/16 400/16	400/16	400/16
Order number		54015	54016	54017
Instead of RRP excl. VAT		1,298.60	1,706.10	2,019.60
RRP excl. VAT		1,039.00	1,419.00	1,615.00



FOR FREE!

Wear parts set, welding gloves & welding wire 0.8 or 1.0 mm / 15 kg

DISCOUNT
-10%



PM 2560T 4XL
with standard equipment

MIG/MAG gas-shielded arc welding systems

PM 2560T 4XL | PM 3060T 4XL

- > Robust, step-controlled welding systems – ideal for workshops, metalworking shops and steel construction
- > Precise, powerful welding with stable arc & finely graded voltage control
- > Efficiency >80% – complies with the Ecodesign Directive
- > High duty cycle for continuous professional use
- > 4-roller wire feed for even transport, even with long hose packages
- > Copper-wound main transformer and oversized rectifier

Models		PM 2560T 4XL	PM 3060T 4XL
Material thickness	mm	0.8-8	0.8-15
Welding current setting range	A	40-250	40-300
Welding current switching stages	No.	11	3 x 7
Steel/stainless steel wire diameter	mm	0.6-1.2	0.8-1.2
Duty cycle at max. welding current	% / A	60/250	60/300
ELMAG hose package	MBC	24/4 m	36/4 m
Mains voltage / fuse protection	V / A	400/16	400/32
Order number		15400	15401
Instead of RRP excl. VAT		2,228.60	2,500.60
RRP excl. VAT		1,999.00	2,250.00



FOR FREE!

Wear parts set, welding gloves & welding wire 1.0 mm / 15 kg



MIG/MAG, MMA multifunction welding inverter

CPTX-I 400 2W | elmag.eu/54080

- > Infinitely variable MIG/MAG, MMA/E manual industrial welding unit with 100% duty cycle at 400 amps
- > SYNERGY function for automatic wire feed control when welding current is increased/decreased with different characteristic curves for STEEL & STAINLESS STEEL
- > With detachable feed unit & water-cooled hose package, as well as many features



Model		CPTX-I 400 2W
Material thickness	mm	1.0-30
Welding current setting range MIG/MAG	A	30-400
Welding voltage setting range	V	12-38
Steel/stainless steel wire diameter	mm	0.8-1.2
Aluminium wire diameter	mm	1.0-1.2
Duty cycle at max. welding current MIG/MAG	% / A	100/400
Welding current setting range MMA	A	30-300
Duty cycle at max. welding current MMA	% / A	60/300
Welding wire reel diameter	mm	200/300
Welding wire reel weight	kg	5/15
Feed drive	Rollers	4
Water-cooled	-	•
Mains voltage / fuse protection	V / A	400/32
Weight	kg	120

INSTEAD OF PRICE EXCL. VAT
~~6,149.-~~

DISCOUNT
-10%

5,535.-



FOR FREE!

MBC 501 W/4 m hose package & welding wire 1.2 mm / 15 kg

**STEEL SET mixed gas 20 litres SG2/G₃Si1
0.8 mm/15 kg | elmag.eu/00285**

379.-

incl. 19% VAT 451.01

**STEEL SET mixed gas 20 litres SG2/G₃Si1
1.0 mm/15 kg | elmag.eu/00286**

379.-

incl. 19% VAT 451.01

**STEEL SET mixed gas 20 litres SG2/G₃Si1
1.2 mm/15 kg | elmag.eu/00287**

379.-

incl. 19% VAT 451.01

MIG/MAG, MMA/E manual, TIG welding inverter

M3S series

- > Mobile multifunctional welding inverter
- > 3 welding processes in one device, MIG/MAG, MMA/E manual & LIFT-TIG (DC)
- > Synergic operation in MIG/MAG process for steel, stainless steel, aluminium and CuSi materials or manual operation
- > 200/250 or 300/350 amps max. welding current at 60 or 40% duty cycle
- > Three-phase 3~400 V, compliant with Ecodesign directive as energy efficiency > 80%
- > 4-roller drive incl. gear rim connection to pressure rollers made of die-cast aluminium
- > XL housing size for welding wire reels Ø & weight: max. Ø 300 mm / max. 15 kg
- > Incl. 2-cycle, 4-cycle, special 4-cycle & spot-welding function
- > In MIG/MAG mode: Inductance, under FN gas pre-flow time (PrG) & gas post-flow time (PoG), soft start (SFt), burn-back/wire burn-back (bub), up/down remote control (u-d), in special 4-step mode, starting current (SCP) and end crater current (ECP) can also be set
- > In MMA mode: Hot start (Hot) & arc force (Arcf) adjustable
- > JOB function: 10 welding programs can be stored
- > With optional accessories and polarity reversal, gas-shielded flood wire & LIFT-TIG (DC) welding also possible
- > Extensive standard equipment: Hose package MBC 24/4 m / 36/4 m or MBC 501W/4 m, ground cable 3 m, electrode holder cable 4 m, gas hose 2.5 m, pressure regulator with 2 pressure gauges incl. Quick Fit coupling, wire spool adapter for D300 & D200 spools, various feed rollers

DISCOUNT
-11%
WELDING

Product video:

M3S 2060 T 4XL
FOR FREE!

 Wear parts set, welder gloves
 & welding wire 0.8/1.0 or 1.2 mm / 15 kg


Accessories	Order number	RRP excl. VAT
Mixed gas steel cylinder M21C (82 Ar/18% CO ₂), 20 l.	54202	355.00
Mixed gas steel set 20 l, welding rod SG2 (G ₂ Si 1) 0.8 mm / 15 kg	00285	379.00
Mixed gas steel set 20 l, welding rod SG2 (G ₂ Si 1) 1.0 mm / 15 kg	00286	379.00
Mixed gas steel set 20 l, welding rod SG2 (G ₂ Si 1) 1.2 mm / 15 kg	00287	379.00
TIG hose package SRC ONE 26/4 m – up/down, 19-piece original equipment set	15850	226.00
TIG hose package SRC ONE 26/8 m – up/down, 19-piece original equipment set	15851	293.00
Steel cylinder, argon 4.6, 20 litres	54242	380.00


M3S 2560 T 4XL

M3S 3040 T 4XL


M3S 3540 T 4XL

M3S 3540T 4XL/WI


Models		M3S 2060 T 4XL	M3S 2560 T 4XL	M3S 3040 T 4XL	M3S 3540 T 4XL	M3S 3540T 4XL/WI
Technical data		Gas-cooled	Gas-cooled	Gas-cooled	Gas-cooled	Water-cooled
Material thickness	mm	0.6–8	0.6–10	0.5–12	0.5–14	1.0–14
Welding current setting range (MIG/MAG)	A	25–200	30–250	30–300	50–350	50–350
Welding current setting range (MMA & TIG)	A	10–200	10–250	10–300	10–350	10–350
Steel wire diameter	mm	0.6–1.0	0.6–1.2	0.6–1.2	0.8–1.6	0.8–1.6
Stainless steel wire diameter	mm	0.8–1.0	0.8–1.2	0.8–1.2	1.0–1.6	0.9–1.6
Aluminium wire diameter	mm	1.0–1.2	1.0–1.2	1.0–1.2	1.0–1.6	1.0–1.6
Duty cycle at 40 °C	% / A	100/155	100/193	100/199	100/221	100/221
Duty cycle at max. welding current	% / A	60/200	60/250	40/300	40/350	40/350
Feed drive	Rollers	4	4	4	4	4
Original ELMAG hose package	MBC	24/4 m	24/4 m	36/4 m	36/4 m	501W/4 m
Efficiency	>	80%	80%	80%	80%	80%
Power consumption in idle mode	W	25	25	25	25	25
Mains voltage / fuse protection	V / A	400/16	400/16	400/16	400/32	400/32
Order data						
Order number		15225	15228	15231	15234	15239
Instead of RRP excl. VAT		1,492.10	1,688.60	1,985.60	2,512.60	3,264.60
RRP excl. VAT		1,329.00	1,499.00	1,759.00	2,229.00	2,899.00

Magnetic pole terminal/bracket

Retaining force 40 kg, up to 300 A welding current
Retaining force 89 kg, up to 600 A welding current
Retaining force 67 kg, up to 300 A welding current, 45/135°, 60/120°, 75/105°, 90°

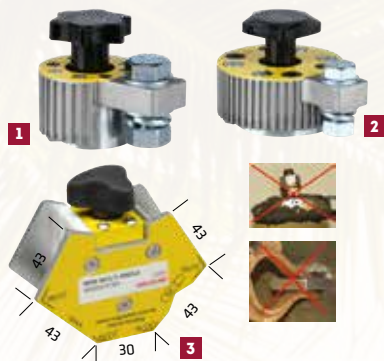

Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 300 A, Ø 40 mm	55470	64.00	58.00
2 600 A, Ø 70 mm	55471	126.00	115.00
3 Mini Multi 300 A	55473	63.00	57.00

Magnetic stop block

Retaining force 68 kg, l×w×h 48 × 31 × 65 mm
Retaining force 182 kg, l×w×h 64 × 41 × 90 mm
Retaining force 268 kg, l×w×h 76 × 52 × 110 mm



Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 MS 165	55476	59.50	54.00
2 MS 400	55508	136.00	122.00
3 MS 600	55477	206.00	185.00

Hand-held lifting magnet

Shear/vertical tear-out force 20/89* kg, incl. 2 LI-ION batteries



Model	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 HL 60-CE	55480	589.00	529.00

*depending on the thickness of the sheet metal to be transported

MIG/MAG hose packages (gas- and water-cooled)

MBC 15 | MBC 25 | MBC 24 | MBC 36 | MBC 501

DISCOUNT UP TO
-13%

Technical data according to EN 60 974-7:

- > MBC 15 Load: 180 A (150 A) / CO₂, 180 A (150 A) / mixed gas M21, ED: 35% (60%)
- > MBC 25 Load: 230 A / CO₂, 200 A / mixed gas M21, ED: 60%
- > MBC 24 Load: 250 A / CO₂, 220 A / mixed gas M21, ED: 60%
- > MBC 36 Load: 320 A / CO₂, 290 A / mixed gas M21, ED: 60%
- > MBC 501W Load: 500 A / CO₂, 450 A / mixed gas M21, ED: 100%, water-cooled



All hose packages with EURO central connection

MIG/MAG hose packages	Material	Wire nozzle Ø	Core Ø	Order number	RRP excl. VAT
MBC 15/3 m	Steel	0.8	0.6-1.0	15710	71.90
MBC 15/4 m	Steel	0.8	0.6-1.0	15713	78.90
MBC 15/5 m	Steel	0.8	0.6-1.0	15715	92.90
MBC 25/3 m	Steel	1.0	0.8-1.2	15730	90.90
MBC 25/4 m	Steel	1.0	0.8-1.2	15733	99.90
MBC 25/5 m	Steel	1.0	0.8-1.2	15735	121.90
MBC 24/3 m	Steel	1.0	0.8-1.2	15720	106.90
MBC 24/4 m	Steel	1.0	0.8-1.2	15723	119.90
MBC 24/5 m	Steel	1.0	0.8-1.2	15725	139.90
MBC 36/3 m	Steel	1.0	0.8-1.2	15740	129.90
MBC 36/4 m	Steel	1.0	0.8-1.2	15743	149.90
MBC 36/5 m	Steel	1.0	0.8-1.2	15745	182.90
MBC 501 W/3 m	Steel	1.2	0.8-1.2	15750	215.90
MBC 501 W/4 m	Steel	1.2	0.8-1.2	15753	238.00
MBC 501 W/5 m	Steel	1.2	0.8-1.2	15755	269.90

MIG/MAG hose package accessory sets

Hose package accessories and wear parts are always available.

Models	MBC 15	MBC 25	MBC 24	MBC 36	MBC 501 W
Standard gas sleeve	2	3	3	3	3
Nozzle block	2	2	2	2	2
Holding spring	2	2	-	-	-
Gas manifold	-	-	2	2	2
Wire nozzle	5 × 0.8/M6	5 × 0.8/M6	5 × 0.8/M6	5 × 1.0/M8	5 × 1.0/M8
Wire nozzle	5 × 1.0/M6	5 × 1.0/M6	5 × 1.0/M6	5 × 1.2/M8	5 × 1.2/M8
Case	•	•	•	•	•
Order number	00065	00067	00066	00068	00069
RRP excl. VAT	27.90	37.90	36.90	58.90	59.90



MIG/MAG, MMA/E manual, TIG welding inverter

P3S 1825M 2L | elmag.eu/15204

- > 3 welding processes in one device, synergic operation in MAG process
- > Max. 180 amps at 25% duty cycle, infinitely variable 20-180 A
- > Mono-phase 1~230 V, compliant with Ecodesign directive as energy efficiency > 85%
- > 2-roller drive incl. gear rim connection to the pressure roller made of die-cast aluminium
- > Incl. 2-cycle, 4-cycle & spot welding function, in MIG/MAG mode: Inductance, BBT (BurnBackTime) wire burnback and in MMA mode: Hot start & arc force adjustable
- > Gas-shielded cored wire welding also possible with optional accessories and polarity reversal
- > Material thickness: MAG 0.8-5 mm / MMA welding electrodes: Ø 1.6-4.0 mm

Extensive standard equipment:

Hose package MBC 15/3 m, earth cable 25 mm²/3 m, electrode holder welding cable 25 mm²/4 m, gas hose incl. quick fit quick connector DN5 / 2.5 m, pressure regulator with 2 pressure gauges incl. quick fit coupling DN5, feed rollers for 0.6/0.8/0.9/1.0 mm wire

Optionally available:

M21 C mixed gas steel cylinder elmag.eu/54202
(RRP: €355.- excl. VAT)

SRC 26V/4 m TIG hose package elmag.eu/15810
(RRP: €164.- excl. VAT)

20-litre argon steel cylinder elmag.eu/54242
(RRP: €380.- excl. VAT)



M21 mixed gas steel cylinder



FOR FREE! Wear parts set & welding wire 0.8 mm / 5 kg

INSTEAD OF PRICE EXCL. VAT
767.50

DISCOUNT
-15%

649.-



MMA/E manual welding inverter

SD 1635M / 2035M PFC/MV & SET

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, Anti Stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan, JOB function (10 welding programs can be stored in the memory)
- > PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage, when using a power generator or with long supply cables (up to 100 m / 3 x 2.5 mm²)
- > Suitable for repair / assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture and metal construction
- > Incl. 4 m electrode holder welding cable 25 mm² / plug Ø 13 mm, 35/50 mm² 3 m ground cable 25 mm² / plug Ø 13 mm, 35/50 mm², carrying strap



DISCOUNT UP TO
-12%

SD 1635M PFC/MV



Models		SD 1635M PFC/MV		SD 2035M PFC/MV	
Technical data		MMA	TIG	MMA	TIG
Welding current setting range	A	10-160	10-90	10-200	10-110
Weldable electrodes Ø	mm	1.6-4.0	1.0-2.4	1.6-5.0	1.0-3.2
Duty cycle at max. welding current at 40 °C	% / A	35/160	35/90	35/200	35/110
100% duty cycle at welding current at 40°C	% / A	100/105	100/60	100/130	100/70
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	230/16	110/16	230/16	110/16
Weight	kg	5.6		5.7	

Order data					
Order number		15010		15015	
Instead of RRP excl. VAT		395.00		436.00	
RRP excl. VAT		385.00		429.00	

Order data SET-K		SD 1635M PFC/MV	SD 2035M PFC/MV
Order number		15011	15016
Instead of RRP excl. VAT		509.00	561.00
RRP excl. VAT		449.00	499.00

Now also included in the SET-K!


'FlexBox 389' stackable transport case, 20 pcs. each
Rutile welding electrodes Ø 2.5 x 350 mm & 3.2 x 350 mm





SD 4060T CEL



Optional accessories for SD 1635M PFC/MV - SD 4060T CEL for LIFT-TIG welding	Order number	RRP excl. VAT
TIG tube set SRC 26 V/4 m, incl. equipment set	15810	164.00
TIG tube set SRC 26 V/8 m, incl. equipment set	15811	220.00
Gas hose 2.5 m for argon/CO2, quick coupling	15135	22.50
Argon pressure regulator, 0-12 litres/min., incl. coupling	54106	81.00
Steel cylinder Argon 4.6, 20 litres / 200 bar filled	54242	380.00

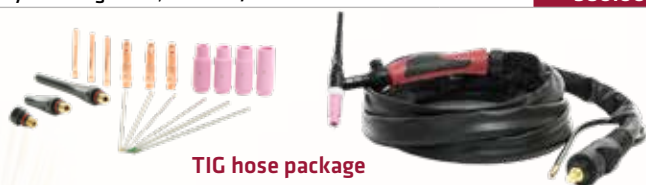

TIG hose package



Now included in the ECO-SET-G!

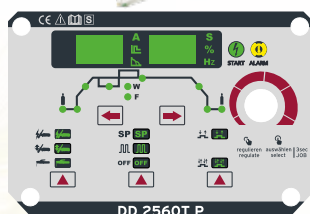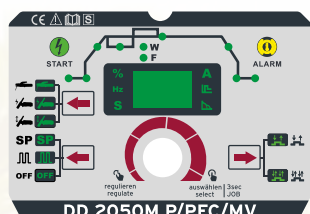

MMA/E manual welding inverter

SD 2560T & SD 4060T CEL

- > Functions such as Hot Start+ (= ignition current increase) & Arc Force+ (= droplet release) 0-10% adjustable, anti-stick preset, VRD & LIFT-TIG selectable
 - > Thermally controlled fan
 - > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100 m extension cable (5 x 2.5 mm²)
 - > Suitable for repair/assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture, metal construction and pipeline construction
- Comprehensive standard equipment**
 Model SD 2560T: 4 m electrode holder welding cable 35 mm² / plug Ø 13 mm, 35/50 mm²
 3 m earth cable 35 mm² / plug Ø 13 mm, 35/50 mm²
 Model SD 4060T CEL: 4 m electrode holder welding cable 50 mm² / plug-Ø 13 mm, 35/50 mm², 3 m ground cable 50 mm² / plug Ø 13 mm, 35/50 mm²

Models		SD 2560T		SD 4060T CEL	
Technical data		MMA	TIG	MMA	TIG
Welding current setting range	A	10–250		20–400	
Weldable electrode Ø	mm	1.6–5.0	1.0–3.2	1.6–6.0	1.0–4.0
Duty cycle at max. welding current at 40°C	% / A	60/250		60/400	
100% duty cycle at welding current at 40°C	% / A	100/200		100/325	
Input power I1 max. / I1 eff.	A	20/15.5	16/12.4	35/27	27/21
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	400/16		400/32	
Weight	kg	11.3		23.2	
Order data					
Order number		15020		15030	
Instead of RRP excl. VAT		686.00		1,320.00	
RRP excl. VAT		669.00		1,285.00	

TIG DC, MMA/E manual welding inverter

DD 2050M P/PFC/MV ECO-SET-G

DD 2560T P ECO-SET-G



- > DC constant or pulsed welding current (0.5-200 Hz), Hot Start+, Arc Force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > DD 2050M P/PFC/MV: PFC design for more energy efficiency and a stable welding process with fluctuating mains voltage or long supply cables
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100 m of extension cable (3 or 5 x 2.5 mm²)
- > Ideal for steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, etc.
- > TIG hose package SRC 26/4 m - HF incl. UP/DOWN Current control on the handle, 4 m electrode holder cable, 3 m earth cable, pressure regulator & 2.5 m gas hose with quick-release couplings, etc.

Models		DD 2050M P/PFC/MV		DD 2560T P	
Technical data		TIG	MMA	TIG	MMA
Welding current setting range	A	5-200		5-250	
Weldable electrodes Ø	mm	1.0-3.2	1.6-5.0	1.0-3.2	1.6-5.0
Duty cycle at max. welding current at 40°C	% / A	50/200	30/200	60/250	
100% duty cycle at welding current at 40°C	% / A	100/145	100/135	100/195	
Input power I1 max. / I1 eff.	A	21/14.8	32/17.5	14/11	18/14
Protection type	IP	IP23		IP23	
Mains voltage / fuse protection	V / A	230/16	230/32	400/16	
Weight	kg	10.2		12.6	
Order data					
Order number		15041		15046	
Instead of RRP excl. VAT		949.00		1,225.00	
RRP excl. VAT		799.00		1,059.00	

TIG AC/DC, MMA/E manual welding inverter

AD 2060M P/PFC/MV ECO-SET-G & W

- > AC/DC constant or pulsed welding current (0.3-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > Multi-voltage version, 2-step/repeat/4-step or spot welding, JOB memory
- > PFC design for stable welding process with fluctuating mains voltage, e.g. power generator operation or long supply cables (up to 100 m / 3 x 2.5 mm²)
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.



Model		AD 2060M P/PFC/MV	
Technical data		TIG	MMA
Welding current setting range	A	5-200	5-200
Weldable electrodes Ø	mm	1.0-4.0	1.6-5.0
Duty cycle at max. welding current at 40°C	% / A	60/200	35/200
100% duty cycle at welding current at 40°C	% / A	100/155	100/110
Input power I1 max. / I1 eff.	A	21/16	32/19
Slow fuse protection	AT	16	32
Protection type	IP	IP23	
Mains voltage / fuse protection	V / A	230/16	230/32
Weight	kg	15.5	
Order data ECO-SET-G			
Order number		15061	
Instead of RRP excl. VAT		1,805.00	
RRP excl. VAT		1,479.00	
Order data ECO-SET-W			
Order number		15062	
Instead of RRP excl. VAT		2,855.00	
RRP excl. VAT		2,349.00	

TIG AC/DC, MMA/E manual welding inverter

AD 2540T P ECO-SET-G & W

- > AC/DC constant or pulsed welding current (0.5-999 Hz), AC square wave or AC sine wave, AC balance (+/- 5), AC frequency regulation (50-250 Hz), Hot Start+, Arc Force+
- > 2-cycle/repeat/4-cycle or spot welding, JOB memory
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings, etc.



Model		AD 2540T P	
Technical data		TIG	MMA
Welding current setting range	A	10-250	10-250
Weldable electrodes Ø	mm	1.0-4.0	1.6-5.0
Duty cycle at max. welding current at 40°C	% / A	40/250	40/250
100% duty cycle at welding current at 40°C	% / A	100/158	100/158
Input power I1 max. / I1 eff.	A	12.5/7.9	15/9.5
Open-circuit voltage	V	14.5	71
Protection type	IP	IP21S	
Mains voltage / fuse protection	V / A	400/16	
Weight	kg	15.5	
Order data ECO-SET-G			
Order number		15066	
Instead of RRP excl. VAT		2,240.00	
RRP excl. VAT		1,959.00	
Order data ECO-SET-W			
Order number		15067	
Instead of RRP excl. VAT		3,300.00	
RRP excl. VAT		2,889.00	



Now included in the ECO-SET-G!

TIG hose package SRC 26/4 m - HF incl. UP/DOWN current control on the handle



Now included in the ECO-SET-W!

TIG hose package SRC 18/4 m - HF incl. UP/DOWN current control on the handle
In addition to ECO-SET-G: Water cooling unit, transport trolley & cooling liquid



Now included in the ECO-SET-G!

TIG hose package SRC 26/4 m - HF incl. UP/DOWN current control on the handle



Now included in the ECO-SET-W!

TIG hose package SRC 18/4 m - HF incl. UP/DOWN current control on the handle
In addition to ECO-SET-G: Water cooling unit, transport trolley & cooling liquid




WIG/TIG AC/DC welding inverter

AD 3260T P ECO-SET-W | elmag.eu/15076

DISCOUNT
-13%

- > AC/DC constant or pulsed welding current (0.5–999 Hz), AC square wave, AC sine wave or AC triangular wave, AC balance (+/- 5), AC frequency control (50–250 Hz), Hot Start+, Arc Force+
- > 2-cycle/repeat/4-cycle or spot welding, JOB memory
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper, e.g. for boiler, container, staircase and railing construction, aluminium structures, etc.

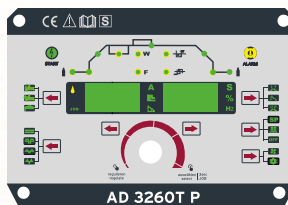

Operating panel
AD 3260T P

Model		AD 3260T P	
Technical data		TIG	MMA
Welding current setting range	A	10–320	10–320
Weldable electrodes Ø	mm	1.0–4.0	1.6–6.0
Duty cycle at max. welding current at 40°C	% / A	60/320	60/320
100% duty cycle at welding current at 40°C	% / A	100/250	100/250
Input power I1 max. / I1 eff.	A	23/18	31/24
Open-circuit voltage	V	74	57
Protection type	IP	IP23	
Mains voltage / fuse protection	V / A	400/32	
Weight	kg	87	
Order data			
Order number		15076	
Instead of RRP excl. VAT		4,120.00	
RRP excl. VAT		3,599.00	



Now included in the ECO-SET-W!

TIG hose package SRC 18/4 m – HF incl. UP/DOWN current control on the handle, E-holder & ground cable, water cooling unit, transport trolley, coolant (device filled), pressure regulator, gas hose, TIG gloves, wear parts set & START-UP SERVICE



TIG high-quality accessories

TIG HIGH PERFORMANCE FRK STYLE set with 42 parts for SR & SRC 17 | 26 | 18 | elmag.eu/59550

- > With a secondary replaceable gas screen in the ceramic or quartz cup gas sleeve, these attachments offer a wider gas coverage for better gas protection and higher quality welding results.
- > The tungsten electrode can protrude up to 35 mm and therefore also provides access to hard-to-reach places when welding with improved visibility.
- > The set includes standard ceramic and transparent high-performance quartz gas sleeves that can be screwed or pressed on.
- > Traditionally used for welding demanding and exotic materials, the FRK system has now become widespread because it offers welders a higher degree of flexibility with a single device.
- > The FRK series nozzles can be used for all materials and processes, including pulse welding when using quartz cup gas sleeves.
- > The gas sieve can be easily replaced or changed using the assembly and disassembly tool.

Detailed brochure



INSTEAD OF PRICE EXCL. VAT
237,-

DISCOUNT
-16%

199.90



FRK-STYLE SET 42 pieces

Tungsten electrode grinder

WSG 4 | elmag.eu/56470

- > Precise sanding of tungsten electrodes ensures the best welding results
- > Practical hand tool in a case for mobile use on the construction site or in the workshop
- > For sanding or cutting electrodes to length
- > Grindable electrode Ø: 1.0/1.6/2.0/2.4/3.2/4.0 mm
- > Various sanding angles: 15/18/22.5/30°
- > Grindable electrode length min: 30 mm
- > Grinding wheel Ø: 33.5 mm (can be used on both sides)
- > Speed: (adjustable) max. 11,000 rpm
- > Engine power: 750 W / 230 V mains connection
- > Weight: 1.6 kg



INSTEAD OF PRICE EXCL. VAT
~~439.-~~
DISCOUNT -10%
379.-



WELDING

Tungsten electrode grinder

WSG 5 | elmag.eu/56475

- > Practical tabletop device with integrated stop for setting the optimum grinding length
- > Clamping and grinding using electrode clamps is also easy to carry out with leather gloves; electrodes with spherical caps or alloyed metal drops can also be ground
- > The grinding process takes place in the longitudinal direction of the electrode and thus improves the ignition properties, ensuring a more stable arc and longer service life
- > Grindable electrode Ø: 1.6/2.0/2.4/3.2/4.0/5.0 mm
- > Infinitely adjustable sanding angle: 10-60°
- > Grindable electrode length min: 35 mm
- > Grinding wheel Ø: 90 mm
- > Speed: 6,500 rpm
- > Engine power: 60 W / Mains connection: 230 V / Weight: 4.0 kg



INSTEAD OF PRICE EXCL. VAT
~~439.-~~
DISCOUNT -10%
395.-



Stainless steel cleaning equipment

ERG-SETs series

- > ERG 500 & ERG 1000: Professional devices with AC transformer & overload protection for occasional to regular use
- > ERG 1600: Professional device for continuous use with infinitely variable inverter-based power control for cleaning, polishing and mirror polishing of TIG welds as well as with AC transformer and separate connection socket for marking
- > For electrochemical cleaning of TIG welding welds
- > Annealing colours and oxides from welding welds can be removed in an environmentally friendly manner without the use of toxic pickling agents
- > Cleaning with carbon fibre brush as well as signing and marking (optional) with graphite anode & felt
- > ERG 1600: Polishing / high-gloss polishing using a carbon fibre brush or graphite anode & felt (optional)

Extensive standard equipment:

Ground cable Ø 16 mm²/3 m, handle cable Ø 10 mm²/4 m, handle + "Performance" carbon fix, IG M10 size XL carbon fibre brush, 1 litre electrolyte special, 1 litre neutralite, ceramic paste, disassembly/assembly tool, 2 1-litre hand spray bottles, wide-mouth electrolyte container, latex gloves, safety goggles, plastic case



ERG 1600-SET

DISCOUNT -10%

Models		ERG 500-SET	ERG 1000-SET	ERG 1600-SET
Technical data				
Performance	kW	0.5	0.8	1.2
Voltage	V	230	230	230
Weight	kg	4	14	7
Order data				
Order number		58495	58496	58497
Instead of RRP excl. VAT		823.00	1,030.00	1,485.00
RRP excl. VAT		739.00	929.00	1,339.00

Induction heater

IHZ 1250 | elmag.eu/57900

- > Output power: 1.25 kW
- > Mains connection: 230 volt
- > Includes 5 standard attachments: Ø 26 mm / straight helix, Ø 37 mm / straight helix, flat induction coil, U-shaped induction cable, flexible induction cable L=1,000 mm
- > Fast heating without open flame
- > Loosening stuck bolts, nuts, tie rods, etc.
- > **Optional: Induction coil set, 10 pieces** elmag.eu/57902 (RRP: €159.- excl. / €189.21 incl. 19% VAT.) consisting of: 1 each of Ø 17, 20, 26, 32, 37, 43 & 50 mm straight helix, 1 flat induction coil, 1 U-shaped induction cable, 1 flexible induction cable L=1,000 mm



Induction coil set, 10 pieces



INSTEAD OF PRICE EXCL. VAT
~~560.-~~
DISCOUNT -11%
499.-



Induction heater

IHZ 2250 | elmag.eu/57901

- > Output power: 2.25 kW
- > Mains connection: 230 volt
- > Includes 6 standard attachments: Ø 20 mm / straight helix, Ø 32 mm / straight helix, Ø 43 mm / straight helix, flat induction coil, U-shaped induction cable, flexible induction cable L=1,000 mm
- > Fast heating without open flame
- > Loosening stuck bolts, nuts, tie rods, etc.
- > **Optional: Induction coil set, 10 pieces** elmag.eu/57902 (RRP: €159.- excl. / €189.21 incl. 19% VAT.) consisting of: 1 each of Ø 17, 20, 26, 32, 37, 43 & 50 mm straight helix, 1 flat induction coil, 1 U-shaped induction cable, 1 flexible induction cable L=1,000 mm



Induction coil set, 10 pieces



INSTEAD OF PRICE EXCL. VAT
~~870.-~~
DISCOUNT -10%
779.-



Induction heater, water-cooled

iT 3.7K230 LCD EVO | elmag.eu/59201

- > Output power: 3.7 kW
- > incl. user-friendly LCD display
- > For heating and loosening stuck and rusted parts: Chassis parts, exhaust systems, brake lines, body parts, drive shafts, lambda probes, axle parts
- > Quick loosening of wheel nuts and bolts
- > 5 selectable heating levels, 230 volt, only 16 kg
- > 3 m hose package, 2.6 m supply cable

FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT
~~3,301.-~~
DISCOUNT -15%
2,805.-



Induction heater, water-cooled

iT 5K400 LCD | elmag.eu/59203


- > Output power: 5 kW
- > incl. user-friendly LCD display
- > Possible uses like iT 3.5K230 LCD
- > 5 selectable heating levels, 400 volt
- > 3 m hose package, 8 m supply cable
- > Weight 66 kg

FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT
~~5,561.-~~
DISCOUNT -15%
4,729.-



Induction heater, water-cooled

HDi 11K400 TC | elmag.eu/59206

- > Output power: 11 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touchscreen with temperature display of the cooling liquid, electronics and transformer (°C/F)



DISCOUNT
-9%

WELDING



FREE NOW!

Induction heating head
for frontal heating

Models		
Technical data		HDi 11K400 TC
Performance	kW	11
Induction hose package length	m	4.25
Supply cable from the generator	m	8
Selectable heating output	Steps	5
Connector plug	-	CEE 16 A
Grid connection/phases	V/~	400/~3
Power frequency	Hz	50/60
Slow fuse protection	AT	16
Weight	kg	120
Order data		
Order number		59206
Instead of RRP excl. VAT		8,737.00
RRP excl. VAT		7,989.00

Water-cooled induction heater

HDi 16K400 TC | elmag.eu/58227

HDi 225K400 TC | elmag.eu/58219

- > Output power: 16 or 22.5 kW
- > For removing broken bolts, shock absorbers, etc.
- > For straightening shafts, tie rods, leaf springs, etc.
- > For loosening stuck axles, ball joints, etc.
- > For bending and forming sheet metal, etc.
- > Can be expanded for temperature-controlled heating of parts using an optional thermal sensor
- > Incl. 7" touchscreen (HDi 225K400 TC with timer function), temperature display of the cooling liquid, electronics and transformer (°C/F)

16K400 TC

225K400 TC



DISCOUNT
-15%



HDi 16K400 TC



FREE NOW!

Induction heating head
for frontal heating

Models			
Technical data		HDi 16K400 TC	HDi 225K400 TC
Performance	kW	16	22.5
Induction hose package length	m	4.25	6
Supply cable from the generator	m	8	8
Selectable heating output	Steps	5	5
Connector plug	-	CEE 32 A	CEE 32 A
Grid connection/phases	V/~	400/~3	400/~3
Power frequency	Hz	50/60	50/60
Slow fuse protection	AT	25	32
Weight	kg	130	140
Order data			
Order number		58227	58219
Instead of RRP excl. VAT		11,412.00	11,902.00
RRP excl. VAT		9,705.00	10,119.00



V-belt drilling machine sets KBM S-I Vario series

DISCOUNT UP TO
-25%

- > With infinitely adjustable, powerful drive systems that allow the cutting speed to be precisely matched to the material
- > Integrated thread-cutting device operated by micro switch
- > Drilling depth adjustment using a clampable scale
- > LED work light



Now included in the SET!

Cutting oil spray 350 ml, machine vice, 2 clamping screws and HSS twist drill cassette

Models		25 S-I Vario	32 S-I Vario
Order data			
Drilling capacity in steel	mm	25	32
Spindle holder	MK	MK2	MK3
Speed range	rpm	10-2,100	10-2,100
Speed steps	-	2	2
Quill stroke	mm	100	135
Column diameter	mm	80	98
T-groove width	mm	14	14
Spindle projection	mm	200	245
Quill distance from table	mm	850	850
Engine power	W	750	1,100
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	125	220
Order data			
Order number		16038	16039
Instead of RRP excl. VAT		2,795.00	3,815.00
RRP excl. VAT		2,090.00	2,900.00



Highest Quality -
Made in Sweden

Gear-driven drill

STRANDS S25 | elmag.eu/81003

DISCOUNT
-15%

- > Exceptionally quiet gearbox operation, maximum service life
- > Automatic tool ejection, clockwise/anti-clockwise rotation
- > The drilling head can be swivelled 360° around the column and is height-adjustable
- > High-performance tool steel spindle for extreme loads
- > High-quality cast-iron rectangular table with T-slots and oil channel
- > Table arm is height-adjustable and can be swivelled 360° around the column
- > Hardened and ground drill column

Model		S 25
Technical data		
Drilling capacity in steel	mm	25
Thread-cutting performance	M	M20
Spindle holder	MK	MK 3
Speed levels / range	rpm	8 / 105-2,900
Quill stroke	mm	135
T-groove width	mm	M14
Drilling table stroke	mm	870
Spindle projection	mm	255
Rotating drilling table	°	± 360
Distance between table and base	mm	0-915/1,198
Drilling table surface	mm	500 x 350
Engine power	W	650/900 (2-stage)
Mains connection	V/Hz	400 / 50-60
Weight	kg	180
Order data		
Order number		81003
Instead of RRP excl. VAT		4,420.00
RRP excl. VAT		3,740.00



Radial column drill

RBS 50 Vario | elmag.eu/82109

- > Ideal design for large-scale heavy-duty drilling
- > Torsion-resistant, heavy-duty boom construction with solid, ground steel column
- > Base body made of heavily ribbed, fine-grained grey cast iron
- > Extremely low-vibration and smooth-running, clockwise and anti-clockwise rotation
- > Simple speed and feed adjustment using control lever
- > Drill spindle with precision bearings, high concentricity
- > Drill head stroke by means of stroke spindle drive, hardened stroke spindle

Model	RBS 50 Vario	
Technical data		
Drilling capacity in steel	mm	50
Thread-cutting performance	M	M32
Spindle holder	MK	MK 4
Speed range	rpm	50–2,000
Speed steps	-	variable
Spindle projection	mm	0–960
Rotatable drilling head	°	± 180°
Drilling table surface	mm	1,200 × 505
Engine power	W	3,000
Mains connection	V/Hz	400 / 50–60
Weight	kg	2,740
Order data		
Order number	82109	
RRP excl. VAT	39,700.00	



Gear milling and drilling machine

MFB series

- > High-quality, high-tech machines for all applications
- > Smooth-running cross table with T-slots and coolant channel
- > High-performance gearbox running in an oil bath
- > Integrated thread cutting device
- > Milling spindle with precision bearing and pull-in spindle for high safety
- > X-axis cross table with infinitely adjustable feed and rapid traverse
- > Integrated coolant system with return flow, tank in the machine base



DISCOUNT UP TO
-22%



MFB 45 TGV



Machine stand for MFB 45 TGV

Models		MFB 45 TGV	MFB 45 SGV	MFB 50 LGT
Technical data				
Drilling capacity in steel	mm	45	45	50
Milling performance face/shank	mm	80/32	80/32	100/40
Quill stroke	mm	120	120	120
Milling table surface	mm	800 × 240	730 × 210	1,120 × 280
T-groove width	mm	14	14	14
Speed range	rpm	12/75–3,200	12/75–3,200	12/115–1,750
Table distance X × Y	mm	455 × 180	375 × 200	580 × 210
Spindle projection	mm	260	270	200–550
Quill distance from table	mm	25–475	0–790	20–420
Mains connection	V/Hz	400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg	278	350	1,120
Order data				
Order number		82100	82101	82152
Instead of RRP excl. VAT		4,305.00	4,810.00	14,910.00
RRP excl. VAT		3,440.00	3,740.00	11,940.00



MFB 45 SGV

MFB 50 LGT



Tool milling machines WFM Servo drive series

DISCOUNT UP TO
-17%



WFM 410 Servo drive

- > Automatic stroke and rapid feed X/Y/Z
- > Ball screw and stepless drives on all axes X/Y/Z
- > Horizontal and vertical milling table
- > Vertical milling head incl. adjustable boring sleeve
- > Digital speed display of the milling spindle
- > Incl. digital position indicator and coolant pump
- > Optionally available: Table enclosure

Models	WFM 210	WFM 310	WFM 410
Technical data			
Drilling capacity in steel	mm 50	50	50
Milling performance of face-milling cutters	mm 125	125	150
Milling performance of end mills	mm 40	40	50
Spindle holder	ISO 40	ISO 40	ISO 40
Speed range	rpm 40-2,000	40-2,000	40-2,000
Speed steps	- variable	variable	variable
Quill stroke	mm 65	65	65
Milling table surface	mm 750 x 320	800 x 400	850 x 450
Table distance X x Y	mm 405 x 305	500 x 400	600 x 450
Vertical table surface	mm 890 x 225	1020 x 225	1,190 x 250
Engine power	W 3,700	3,700	5,700
Mains connection	V/Hz 400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg 1,450	1,550	1,750
Order data			
Order number	82125	82126	82127
Instead of RRP excl. VAT	44,290.00	48,250.00	52,230.00
RRP excl. VAT	37,520.00	39,990.00	44,240.00

Universal lathes SUPERTURN series

DISCOUNT UP TO
-34%



SUPERTURN 550/125 Vario

- > Variable speed control
- > Digital speed display and zero voltage release
- > Three-jaw lathe chuck Ø 100 mm or 125 mm, centre
- > Centring point MK 2 & MK 3 or MK 4
- > Lathe chuck protection with safety switch
- > Chip trough / splash board

Models	SUPERTURN 300/90 Vario	SUPERTURN 550/125 Vario	SUPERTURN 700/140 Vario
Technical data			
Distance between centres	mm 300	550	700
Centre height	mm 90	125	140
Turning Ø over bed / carriage	mm 180/120	250/145	280/165
Spindle bore	mm 20	26	26
Speed range, variable	rpm 50-2,500	50-2,000	50-2,500
Engine power	W / V 450/230	750/230	1,000/230
Weight	kg 60	120	190
Order data			
Order number	88110	88111	88112
Instead of RRP excl. VAT	1,720.00	2,870.00	3,690.00
RRP excl. VAT	1,290.00	1,880.00	2,780.00


Universal lathe

PROFI 1000/200 HD | elmag.eu/88167

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > Coolant container and pump integrated in the machine base
- > Incl. digital 3-axis position indicator
- > Incl. electromagnetic spindle brake
- > **With large Ø 51 mm spindle bore**



Model	1000/200 HD	
Technical data		
Centre width / centre height	mm	1,000/200
Turning diameter over bed / slide	mm	400/214
Spindle bore	mm	51
Spindle speeds number / range	rpm	12 / 40-1,700
Engine power, 400 volt	kW	2.4
Weight	kg	1,200
Order data		
Order number	88167	
Instead of RRP excl. VAT	13,780.00	
RRP excl. VAT	12,400.00	

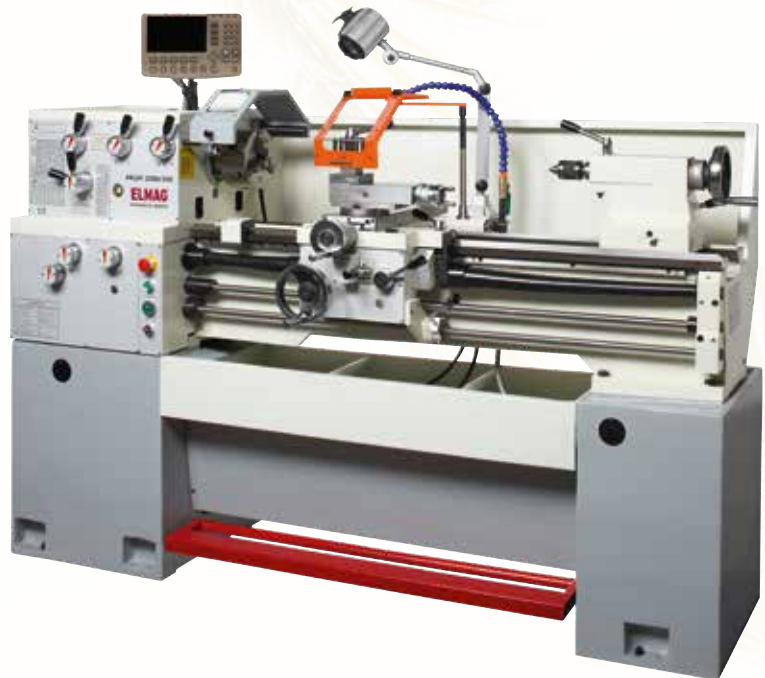

DISCOUNT
-10%

METALWORKING

Universal lathe

INDIVIDUAL series

ELMAG Vario lathes bring maximum control to any workshop: Variable speed, constant cutting speed, precise operation and great flexibility for a wide range of materials and applications. Ideal for repairs, training or small-batch production – compact, reliable and ready to deliver perfect results at every stage of the process.



1000/180 - Vario



RÖHM



Models		1000/180 Vario	1000/205 Vario	1500/280 HD Vario
Technical data				
Centre width / centre height	mm	1,000/180	1,000/205	1,500/280
Turning diameter over bed / slide	mm	354/223	410/255	560/355
Spindle bore	mm	52	52	80
Spindle speeds (variable)	rpm	30-3,000	30-3,000	25-1,600
Engine power, 400 volt	kW	2.2	5.5	7.5
Weight	kg	1,680	1,565	2,690
Order data				
Order number		88182	88184	88186
Instead of RRP excl. VAT		16,370.00	24,200.00	34,500.00
RRP excl. VAT		14,740.00	21,700.00	30,990.00



1000/205 - Vario



1500/280 HD - Vario

HD model with a large spindle bore of Ø 80 mm



Swivel bending machine SBM 1270 × 2.0 mm HS(S) 2.0

DISCOUNT UP TO
-31%

Modern bending technology – optimised handling

- > Working or bending length max. 1,270 mm
- > Sheet thickness up to 2 mm, large bending angle 0 – 135°
- > Bending beam segments made of high-alloy, ground special steel
- > HS models: Upper beam segments can be removed and repositioned, bending and lower beam monobloc
- > HSS models: Upper and bending beam segments can be removed and moved, lower beam monobloc
- > Segment widths 25/30/35/40/45/50/75/100/150/200/(250)/270 mm
- > Opening width between upper and lower cheek max. 48 mm
- > Precise upper and bending beam adjustment for rapid adaptation to different material thicknesses
- > Eccentric technology for effortless bending beam actuation
- > Powerful cylinder for energy-saving work
- > Robust, very durable construction



Optional accessories	Order number	Instead of RRP excl. VAT	RRP excl. VAT
Rear stop	81109	130.00	106.00

Models	Sheet thickness max.	Working length max.	Upper beam segments	Bending beam segments	Lower cheek segments	Opening max.	Bending angle	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	mm				mm	°	kg			
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	1	1	48	0-135	320	81107	2,335.00	1,870.00
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	12	1	48	0-135	335	81108	2,870.00	1,990.00



Electro-hydraulic workshop presses WPMEH series

DISCOUNT UP TO
-31%

- > Electro-hydraulic drive, two drive speeds
- > Hydraulic cylinder laterally adjustable
- > Switching valve for permanent operating speed
- > Press table with locking bolt and press table chain for convenient height adjustment
- > Additional manual hand pump
- > Incl. overload safety valve and pressure gauge
- > Chrome-plated cylinder piston



WPMEH 100/2-K

Models		WPMEH 60/2-K	WPMEH 100/2-K
Technical data			
Pressing capacity max.	t	60	100
Oil flow rate level 1/2	l/min	2.82/11.84	5.64/17.2
Piston speed level 1/2	mm/s	8.69/2.07	7.54/2.47
Return speed	mm/s	10.79	9.06
Engine power	kW	1.5	2.2
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	540	970
Order data			
Order number		81811	81816
Instead of RRP excl. VAT		7,685.00	9,860.00
RRP excl. VAT		6,690.00	8,840.00



Band saw machine

EasyCut 275.230 DG | elmag.eu/78900

- > The EasyCut series is a universal gravity band saw with a robust cast iron saw frame and saw blade with a height of 27 mm
- > Precise guidance of the saw blade via carbide guides
- > The saw frame is mounted with preloaded tapered roller bearings
- > Synchronised brushes for chip removal
- > The feed speed of the saw frame is continuously controlled by a hydraulic cylinder with overflow valve



0°	230	275 × 180	250 × 230	230
45°R	190	190 × 150	170 × 230	180
60°R	120	120 × 100	120 × 100	100
45°L	170	185 × 100	90 × 230	150

INSTEAD OF PRICE EXCL. VAT
~~5,440.-~~
4,900.- **DISCOUNT -10%**

Model	Operating mode	Mitre range	Saw blade speed	Saw blade dimensions	Remaining piece length	Inlet height	Dimensions l×w×h	Drive	Weight
		°	m/min	mm	mm	mm	mm	kW / V / Hz	kg
275.230 DG	manual	-45° to 60°	40/80	2,720 × 27 × 0,9	20	978	1,588 × 1,150 × 1,477	1.1/1.5/3 × 400/50	370

Band saw machines

BOMAR Ergonomic series



- > Universal band saw with a sturdy cast-iron frame and a 27 mm saw blade
- > The precise carbide guide of the saw blade is the prerequisite for excellent cutting performance
- > Drive 1.5 or 2.2 kW, 3 × 400 / 50 V / Hz
- > DGH models: Hydraulic cutting pressure monitoring; continuously variable saw blade speed

		320.258 DG/DGH	340.278 DG/DGH	375.308 DGH
	0°	258	278	308
	45°	210	260	250
	60°	135	155	155
	0°	250	275	308
	45°	195	230	235
	60°	110	115	105
	0°	320 × 100	340 × 100	375 × 220
	45°	210 × 100	230 × 100	235 × 200
	60°	135 × 100	145 × 100	150 × 95
	0°	275 × 250	340 × 275	340 × 308
	45°	185 × 245	230 × 255	220 × 285
	60°	135 × 110	145 × 115	160 × 105

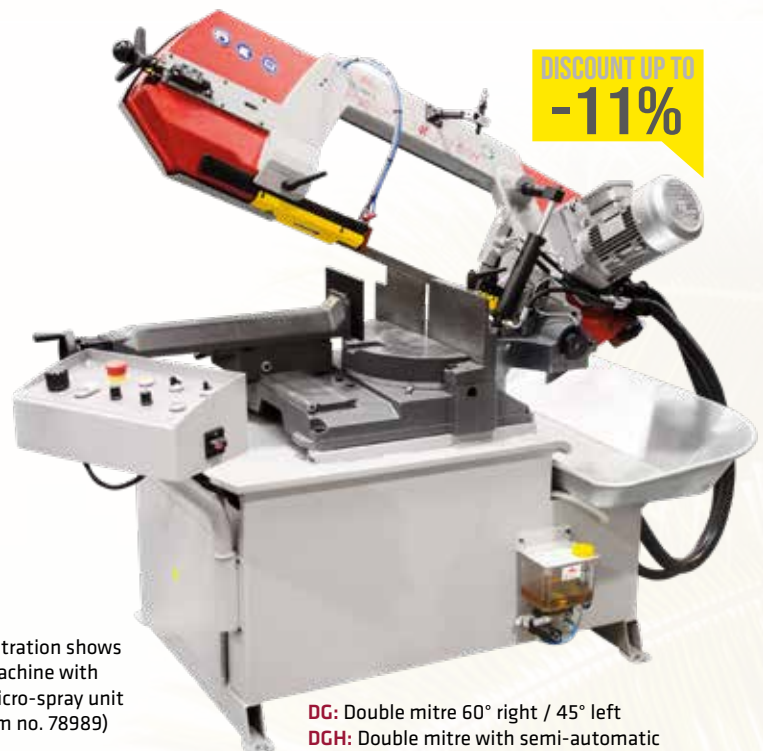


Illustration shows a machine with a micro-spray unit (item no. 78989)

DG: Double mitre 60° right / 45° left
DGH: Double mitre with semi-automatic

Models	Operating mode	Mitre range	Saw band speed	Saw blade dimensions	Remaining piece length	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		°	m/min	mm	mm	kg			
320.258 DG	manual	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78903	6,925.00	6,240.00
320.258 DGH	semi-automatic	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78904	10,395.00	9,320.00
340.278 DG	manual	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78905	7,865.00	6,990.00
340.278 DGH	semi-automatic	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78906	11,845.00	10,690.00
375.308 DGH	semi-automatic	-45° to 60°	20-120	3,380 × 27 × 0.9	20	400	78913	13,905.00	12,500.00

Product video:



Metalworking circular sawing machine

TKS 355 | elmag.eu/78309

Dry cutters enable the coolant-free cutting of pipes and profiles made of steel, non-ferrous metals, plastics and composite materials.

- > Tried and tested for decades, durable technology & above-average powerful 2.2 kW drive
- > Solid cast construction, precise mitre cut 0-45°
- > Saw blade outer/inner diameter: 355/25.4 mm
- > Practical quick-release system and ergonomic handle
- > Extendable chip drawer and adjustable depth stop
- > Easy saw blade mounting with spindle lock and transport lock
- > Incl. EVOLUTION PRO HM saw blade 90 GZ
- > Machine stand optionally available (item no. 78305)



Model	Cutting area max.	Speed	Mains voltage	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	rpm	V/Hz	kg			
TKS 355	180 × 95	1,300	230/50	25	78309	690.00	655.00

Combination grinders

KSM "light line" series

DISCOUNT UP TO
-28%

- > Combination grinders for versatile use
- > Shaping – Regrinding – Sharpening

Models		KSM 150/686	KSM 100/150 BTS
Sanding disc Ø / width / bore	mm	150 / 20 / 12.7	-
Sanding speed	m/s	23.4	-
Sanding belt speed	m/s	15.4	7.3
Grinding belt width / length	mm	50/686	100/915
Surface grinding area	mm	285 × 50	100 × 150
Grinding arm angle	°	-	0-90
Speed	rpm	2,980	2,850
Drive engine power	W	250	370
Mains voltage / frequency	V/Hz	230 / 50-60	230 / 50-60
Weight	kg	7	6.5
Order number		61090	61108
Instead of RRP excl. VAT		88.40	108.00
RRP excl. VAT		64.00	141.00



KSM 100/150 BTS



KSM 150/686

Combination grinders

KSM series

DISCOUNT UP TO
-21%

- > Robust and sturdy combination grinders
- > Abrasive belt and grinding wheel for deburring
- > Heavy-duty version of the die-cast aluminium housing
- > KSM 150 & 200 with steel wire brush and polishing disc



KSM 150 & 200

Models	KSM 1000/150 N	KSM 1000/200 N	KSM 1150/250
Technical data			
Dimensions of the abrasive belt	50 × 1,000 mm	100 × 1,000 mm	100 × 1,150 mm
Dimensions of the grinding wheel	150 × 25 × 20 mm	200 × 25 × 20 mm	250 × 38 × 25 mm
Dimensions of the steel brush	125 × 19 × 12 mm	200 × 19 × 12 mm	-
Dimensions of the polishing brush	125 × 19 × 12 mm	175 × 25 × 12 mm	-
Engine	230 Volt / 50 Hz	400 Volt / 50 Hz	400 Volt / 50 Hz
Performance	350 Watt	750 Watt	1,220 Watt
Conveyor belt speed	15 m/s	15 m/s	30 m/s
Speed	2,850 rpm	2,850 rpm	2,850 rpm
Dimensions in mm	560 × 380 × 250	600 × 460 × 340	650 × 540 × 425
Weight	16.5 kg	26 kg	54 kg
Order data			
Order number	82034	82035	82036
Instead of RRP excl. VAT	452.00	672.00	1,105.00
RRP excl. VAT	360.00	530.00	930.00



KSM 1000/150 N with shaft extension



KSM 1150/250

Radius grinding machine

RSM 100x2000 | elmag.eu/82193

Heavy-duty radius grinding machine for producing precise radii on pipes, sections and solid stock. Can also be used as a belt sander for deburring, chamfering, rounding, sharpening, shaping contours, surface grinding and finishing of surfaces.

- > Easy adjustment of the grinding angle, low-vibration concentricity
- > Easy replacement of contact wheels and abrasive belts – with an abrasive belt tensioner

Model	RSM 100x2000	
Sanding belt width / length	mm	100/2,000
Surface grinding area	mm	100 × 400
Sanding belt speed	m/s	30
Drive engine power	W	3,000
Mains voltage / frequency	V/Hz	400 / 50-60
Weight	kg	145
Order number		82193
Instead of RRP excl. VAT		3,055.00
RRP excl. VAT		2,625.00



DISCOUNT
-14%

Includes a 7-piece roller set with cassette

METALWORKING

Milling cutter grinding machine

EMS 420 W | elmag.eu/61001

Its compact design and finely adjustable grinding angles make it ideal for workshops, series production and industrial machining. With the EMS 420 W, you get an efficient, reproducible and low-maintenance machine that consistently delivers optimum cutting quality with its cutters.

- > For 2-, 3- and 4-blade cutters
- > Precise adjustment of the lower edges, centre groove and helix angle
- > Improved tool life through precise regrinding
- > Includes collet set: 4 / 6 / 8 / 10 / 12 / 14 / 16 / 18 / 20 mm

Model	EMS 420 W	
Grinding area	mm	4-20
Connection	V / W	220/200
Speed	rpm	4,400
Weight	kg	16
Order number		61001
Instead of RRP excl. VAT		1,130.00
RRP excl. VAT		940.00



DISCOUNT
-17%

NEW!

Drill sanding machines

DBG series

- > CBN sanding disc for HSS
- > Adjusting device for centre angle 95°-135°
- > Free angle and cross sanding function
- > For drill bit Ø 2-15 or 8-32 mm
- > 11 collets 3-13 mm (315 W) or 23 collets 8-30 mm (832 W)



FREE NOW!

Collet holder and collet set ER 20 or 40

Models		DBG 315 W	DBG 832 W
Sanding range drill Ø	mm	2.1-15	8-32
Sanding range Centre angle	°	95-135	95-135
Speed	rpm	4,400	4,400
Mains connection	V/Hz	230 / 50-60	230 / 50-60
Length × Width × Height	cm	32 × 18 × 19	49 × 25 × 26
Order number		61000	61010
Instead of RRP excl. VAT		685.00	1,535.00
RRP excl. VAT		515.00	1,150.00



DBG 315 W



DBG 832 W

DISCOUNT
-25%



High-frequency bottle vibrator

HFFR series

The high-frequency bottle vibrators with integr. frequency converters impress with their compact design, forming a single unit. Consisting of vibrators, protective conduit, switch housing and connection cable with a Schuko plug. The very high compaction performance guarantees high reliability.

Models	Bottle Ø	Hose length	Head length	Compression performance	Frequency	Volume	Weight	Order number	RRP excl. VAT
	mm	m	mm	m ³ /h	Hz	dB(A)	kg		
HFFR 38/5	38	5	404	20	12,000	70	14.5	64670	995.00
HFFR 50/5	50	5	468	40	12,000	76	20	64671	995.00
HFFR 59/5	59	5	499	45	12,000	79	22.8	64672	995.00

Stone cutting machine

STM 600/350 - SET | elmag.eu/61365



- > All-round machine for construction companies, pavers, landscapers
- > Robust design, yet perfect to handle
- > Cutting height 110 mm, cutting length max. 600 mm
- > 230-volt engine with 2.2 kW
- > Height-adjustable cutting head
- > Incl. transport wheels and incl. water pump
- > Disc cooling with dosing valve
- > Weight: 72 kg

+ With diamond disc UNI Ø 350 mm

INSTEAD OF PRICE EXCL. VAT
913.-
DISCOUNT -13%
795.-



Stone cutting machines

SUPREME series - SET

DISCOUNT UP TO -15%

Precision bridge saw for professional use. Construction site machine for granite and marble slabs, bricks, natural stone, concrete blocks, ceramics, tiles and porcelain stoneware.

- > Incl. Universal-DiaProfi UNI - diamond disc Ø 300 mm
- > Extensive range of accessories available on request
Additional table, mounting clamps, front handle, handle by the engine (for immersion), longitudinal stop, engine 2.2 kW (400 volt)
- > Incl. wheel set and laser cutting display



Models	Cutting performance		Diamond cutting disc		Electric motor			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
					Rated performance	Voltage/frequency	Wt.			
	mm	mm	mm	mm	kW	V/Hz	kg			
SUPREME 100 S-SET	85	1,000	300	25.4	2.2	230/50	83	61121	2,510.00	2,125.00
SUPREME 120 S-SET	85	1,200	300	25.4	2.2	230/50	86	61122	2,545.00	2,225.00
SUPREME 150 S-SET	85	1,500	300	25.4	2.2	230/50	92	61123	2,690.00	2,370.00

Reversible vibratory plate

RPB series

This allows large areas to be compacted with powerful machines. On all models, the machine is protected from damage by a high-quality steel guard frame. Incl. transport hook.

- > Infinitely hydraulically adjustable forward and reverse travel
- > Self-tensioning clutch system for reduced V-belt wear
- > Crack and break-resistant base plate made of hardened steel
- > Guide rail can be locked in vertical position during transport or storage
- > New protective cage offers reliable protection for the engine and the device
- > Easy-to-mount transport wheels and rubber mat optionally available



RPB30-50

DISCOUNT UP TO
-14%

Models	Centrifugal force	Max. Speed	Surface compression	Petrol engine	Performance	Plate size	Working width	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kN	m/min	m ² /h	Type	kW	mm	mm	kg			
RPB24-50	24	20	600	Honda GX 160	3.7	500 × 680	500	149	63010	2,775.00	2,395.00
RPB30-50	30	20	600	Honda GX 200	4	500 × 710	500	181	63012	3,225.00	2,895.00
RPB30-60	30	20	720	Honda GX 200	4	600 × 710	600	185	63015	3,335.00	3,060.00

Rammer

TCB-65 | elmag.eu/63079

The ELMAG rammers impress with their ease of use and high level of working comfort, both on straight surfaces or in narrow trenches. The new design allows for very easy operation during service and maintenance work.

- > Ramming foot width 285 mm
- > Jump height 40-65 mm
- > Site-ready guards made of high-strength steel and impact-resistant plastic provide optimal protection for the motor and attachments
- > Compact design allows turning in the trench
- > The Honda GXR120 petrol engine offers ample power reserves even under heavy loads
- > Weight: 70 kg



INSTEAD OF PRICE EXCL. VAT
1,835.-
 DISCOUNT
-15%
1,560.-

Floor saw

FSB-503 | elmag.eu/63083

Asphalt and concrete are uniquely cut with this machine series. The model is designed for diamond blades with diameters of 350 mm, 400 mm, 450 mm and 500 mm, depending on the required cutting depth.

- > Heavy-duty, torsion-resistant machine frame for an optimal straight cut
- > Optimal weight distribution
- > Adjustable line guidance
- > Max. cutting depth 110/135/160/185 mm
- > 40 litre water tank
- > Honda GX390 engine – 10.2 HP
- > Weight: 127 kg
- > Diamond blades are available as an optional extra



INSTEAD OF PRICE EXCL. VAT
1,935.-
 DISCOUNT
-10%
1,740.-



Laser-etched marking on forks for optimal position of the pallet truck when driving into the pallet from the side

Hand pallet truck HW 2500 & 1000 series

DISCOUNT UP TO
-33%

Our new ELMA hand pallet truck guarantees safe transport of your goods!

Rubber wheels and polyurethane tandem castors ensure massive noise reduction during transport! The robust stop block at the tip of the fork makes it easy to drive onto pallets! 3 functions of the one-hand lever: Lifting – driving – lowering!

HW-QL 2500

For even greater efficiency, we offer the robust, multi-talented 'HW-QL 2500' with a QUICK-LIFT function up to 300 kg, ideal for saving time and energy!

HWN 1000

Our new low-platform manual lift truck offers a load capacity of 1,000 kg and a minimum entry height of just 35 mm. Ideal for effortless transportation of heavy loads with a very low entry height.

Models	Load capacity	Fork width A1	Fork length B	Minimum height	Max. lifting height	Dimensions (lxb)	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	mm	kg			
HW 2500	2,500	540	1,150	80	200	1,520 × 540	65	33300	399.00	349.00
HWK 2500	2,500	540	800	80	200	1,170 × 540	62	33301	399.00	349.00
HWL 2500	2,000	540	1,800	80	200	2,170 × 540	90	33302	629.00	499.00
HW-QL 2500	2,500	540	1,150	80	200	1,520 × 540	65	33305	469.00	399.00
HWN 1000	1,000	540	1,150	35	95	1,520 × 540	52	33303	892.00	599.00



Electric hand pallet truck EHW 1500 | elmag.eu/33310

DISCOUNT
-15%

Our electric manual lift truck EHW 1500 is a true all-rounder with a load capacity of 1,500 kg. Thanks to its light weight and the fast charging time of our lithium-ion batteries, you can use it quickly and effortlessly. It handles the transport of pallets, materials and goods with ease and helps to optimise your material flow.

- > Precise digital LCD display for the battery charge level
- > Excellent manoeuvrability thanks to lateral support rollers for optimum cornering
- > Enjoy up to 8 hours of battery life
- > Charger included for convenient recharging
- > The 24 V/20 Ah Li-ion battery weighs just 4.4 kg
- > Effortless battery change in just one movement

Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
EHW 1500	1500	540	1150	80	195	123	33310	2,365.00	1,999.00



Stainless steel manual lift truck HW INOX 2500 | elmag.eu/33306

The HW INOX 2500 is a stainless steel manual lift truck designed for hygienically sensitive applications. The high-quality finish prevents contamination and ensures high resistance to moisture and chemical exposure. Thanks to its ease of use and excellent manoeuvrability, it is ideal for everyday industrial use in warehouses and production facilities.

- > Stainless steel (AISI 304 / V2A): corrosion-resistant and hygienic
- > Ideal for the pharmaceutical, chemical and food industries
- > Resistant to moisture, steam and weak acids
- > 3 functions of the one-hand lever: Lift – Move – Lower
- > Nylon swivel castors and nylon tandem castors for smooth running
- > Agile and compact – ideal for confined spaces

Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
HW INOX 2500	2500	540	1150	80	200	65	33306	1,995.00	1,895.00

High lift truck

HHW series

Our HHW 1000 & 1025 high lift trucks with an impressive 1,000 kg load capacity and a generous lifting height of 1,600 or 2,500 mm are the ultimate solution for your lifting and transport requirements. Whether you work in warehouses, production plants or other facilities, these lift trucks are the ideal choice. With their remarkable load capacity, you can move heavy loads with ease. The generous lifting height allows you to easily access higher shelves or storage areas.

- > Fork size of 550 x 1,150 mm
- > Rubber swivel castors + PU (polyurethane) tandem castors
- > Foot protection on the swivel castors
- > Foot pedal


 DISCOUNT
-18%

Models	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
HHW 1000	1,000	550	1,150	85	1,600	220	33321	1,340.00	1,099.00
HHW 1025	1,000	550	1,150	85	2,500	300	33322	1,645.00	1,349.00

Trolley jacks

(ALU) EURO JACK & PROFI JACK

Our versatile and indispensable trolley jacks are a must for every automotive workshop. With their robust construction and smooth-running castors, they make it easy to lift vehicles. The lifting bar included in the scope of delivery ensures easy and efficient handling.


 DISCOUNT UP TO
-16%

Model		EURO JACK 2000	PROFI JACK 2500	PROFI JACK 3000	ALU EURO JACK 1500
Load capacity	kg	2,000	2,500	3,000	1,500
Ground clearance	mm	130	80	95	80
Max. height	mm	330	500	552	355
Dimensions l x w x h	mm	440 x 195 x 140	682 x 340 x 150	790 x 355 x 180	550 x 240 x 130
Weight	kg	8.3	32	44	14.5
Order number		33610	33600	33615	33620
Instead of RRP excl. VAT		69.00	255.00	265.00	179.00
RRP excl. VAT		58.00	229.00	249.00	169.00

Jack stands

3,000 & 6,000 kg

ELMAG jack stands up to 6,000 kg are stable and robust supports that have been specially developed for safe support and lifting of vehicles and heavy loads. With their high load capacity and stability, they are ideal in workshops and private use for repair and maintenance work.

- > Base frame with practical click system
- > Large base for optimum stability and secure footing
- > No sinking into the ground thanks to a wide contact surface
- > Available in two versions with load capacities of 3 tonnes and 6 tonnes
- > Available as a set of 2 for maximum safety


 DISCOUNT UP TO
-12%

Models	Load capacity	Minimum height	Maximum height	Dimensions footprint L x W	Weight (per pair)	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	kg			
Jack stands 3,000 kg	3,000	295	415	200 x 190	4.8	33670	45.00	39.90
Jack stands 6,000 kg	6,000	390	560	270 x 240	8.8	33671	79.00	69.90



Workshop crane

PROFI CRANE 2000 | elmag.eu/33680

DISCOUNT
-20%

The workshop crane has been specially designed for safe and effortless removal and installation of engines, gearboxes and other heavy vehicle components. Ideal for professional use in the workshop, this crane offers maximum efficiency and safety for demanding lifting tasks.

- > 4-way adjustable crane boom with variable lifting capacity, depending on the reach
- > Sturdy load hook on the boom arm
- > Compact storage thanks to fold-away supports
- > Quick assembly and dismantling

Model	Load capacity	Boom working range	Lifting height	Dimensions l x w x h	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	kg			
PROFI CRANE 2000	2,000	940-1435	0-2,200	1,710 × 1,050 × 1,500	95.3	33680	499.00	399.00



Mobile gantry crane

1000 kg | elmag.eu/33435

DISCOUNT
-21%

The mobile gantry crane is the ideal solution for safe lifting and handling of heavy loads in workshops, assembly halls and production areas.

- > Adjustable beam height for flexible use
- > Smooth-running castors for easy positioning
- > Solid steel frame construction
- > Ideal for workshops, assembly and production
- > Compatible with ELMAG beam clamps, roller trolleys, reel trolleys, etc.

Model	Load capacity	Height min. to max.	Working width	I-beam width	Dimensions l x w x h	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
Mobile gantry crane 1000 kg	1,000	2,258-3,450	1,800	140	2,500 × 1,200 × 2,520	128	33435	825.00	649.00



Beam clamps

ELMAG beam clamps are perfect for quickly creating a lifting point for lifting tools! The central spindle mechanism ensures a secure fit on the beam!

DISCOUNT UP TO
-26%

- > Easy and simple installation
- > Special clamp jaw design keeps loads away from the flange edge
- > Suitable for a wide range of beams and flange widths
- > Low-profile design

Models	Load capacity	Beam flange width	Dimensions (l x b x h)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	kg			
1,000 kg beam clamp	1,000	75-220	360 × 64 × 155	3.8	33380	50.00	39.00
2,000 kg beam clamp	2,000	75-220	360 × 71 × 155	4.6	33381	56.50	42.90
3,000 kg beam clamp	3,000	80-320	490 × 103 × 225	9	33382	93.50	69.00
5,000 kg beam clamp	5,000	80-320	490 × 110 × 225	11	33383	100.00	76.90

Roller trolleys

With the ELMAG roller trolleys, you can easily and quickly move the desired lifting tool into position.

- > Suitable for a wide range of beams and flange widths
- > Low-profile design


 DISCOUNT UP TO
-23%

Models	Load capacity	Beam flange width	Min. curve radius	Dimensions (lxbxh)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m	N	mm	kg			
1,000 kg roller trolley	1,000	58-220	0.7	300 × 238 × 183	8.8	33391	89.50	69.00
2,000 kg roller trolley	2,000	66-220	0.9	300 × 277 × 208	14	33392	121.00	94.90
3,000 kg roller trolley	3,000	74-220	1.2	328 × 324 × 249	23	33393	188.00	149.00
5,000 kg roller trolley	5,000	90-220	1.0	354 × 373 × 296.5	40	33394	294.00	229.00

Reel trolleys

Quickly move the desired lifting tool into position – it's easy with ELMAG reel trolleys!

- > Desired position can be set using the chain
- > Suitable for a wide range of beams and flange widths
- > Low-profile design


 DISCOUNT UP TO
-30%

Models	Load capacity	Beam flange width	Min. curve radius	Dimensions (lxbxh)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m	N	mm	kg			
1,000 kg reel trolley	1,000	58-220	0.7	353.5 × 238 × 183	12.5	33401	142.00	99.00
2,000 kg reel trolley	2,000	66-220	0.9	362 × 277 × 208	17	33402	167.00	139.00
3,000 kg reel trolley	3,000	74-220	1.2	406.5 × 324 × 249	28	33403	241.00	199.00
5,000 kg reel trolley	5,000	90-220	1.0	434.5 × 373 × 296.5	45	33404	346.00	299.00

Manual lever hoists

HHZ series

ELMAG manual lever hoists promise high efficiency at low cost! Quick lifting and lowering by simply switching the handle. The compact yet strong lever is suitable for operation in confined spaces.

- > Housing made of high-strength steel
- > The standard handwheel is made of cast steel for high strength and reliable operation.
- > No pre-tensioning required.
- > Protective sleeve made of special elastomer, extremely resistant to heat and cold.
- > Hooks made of heat-treated, galvanised steel


 DISCOUNT UP TO
-22%

Models	Load capacity	Chain dimension	Number of chain strands	Lifting height	Required lifting force	Dimensions (lxbxh)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m		m	N	mm	kg			
HHZ 750	750	6 × 18	1	1.5	147	160 × 133 × 320	6.8	33370	121.00	94.90
HHZ 1500	1,500	8 × 24	1	1.5	295	182 × 157 × 380	10.6	33371	157.00	124.90
HHZ 3000	3,000	10 × 30	1	1.5	304	207.5 × 210 × 490	19.5	33372	247.00	199.00



Chain hoists

HKZ series

DISCOUNT UP TO
-24%

Simple, robust and high-quality combined in one – the chain hoists from ELMAG! Simply lift and lower heavy loads using a chain hoist at a low price!

Free yourself of the need for a power source and use your ELMAG manual chain hoist wherever it is required, whether in the workshop or on site.

- > Housing made of high-strength steel
- > Larger diameter of the friction disk ensures a reliable brake
- > Maintenance-free bearings with increased corrosion resistance
- > Hooks made of heat-treated, galvanised steel

Models	Load capacity	Chain dimension	Number of chain strands	Lifting height	Required lifting force	Dimensions (lxbxh)	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	m		m			kg			
HKZ 1000	1,000	6 × 18	1	2.5	270	148 × 138.5 × 345	10.2	33360	111.00	84.90
HKZ 2000	2,000	8 × 24	1	3	460	175 × 161 × 410	16.5	33361	157.00	124.90
HKZ 3000	3,000	7.1 × 21	2	3	311	232 × 161 × 478	21.4	33362	209.00	159.00
HKZ 5000	5,000	10 × 30	2	3	462	258 × 180 × 605	37.4	33363	314.00	239.00



Electric chain hoists

EKZ series

DISCOUNT UP TO
-39%

ELMAG electric chain hoists: Efficient, powerful, safe. With high precision and robust technology, they lift your loads effortlessly.

- > Safe, reliable electromagnetic brakes with low wear and easy maintenance for fast, stable braking, without the need for additional adjustments
- > The load disc, made from high-precision CNC-machined alloy steel, ensures smooth movement of the load chain
- > Intelligent overload protection device safely diverts the force away from the hoist motor in the event of an overload

Models	Capacity	Chain strands	Chain size	Stroke	Speed	Engine power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg		mm				kg			
EKZ 500/2	500	1	6.3 × 19	6	7.6/2.5	0.9/0.3	54	33350	1,675.00	1,349.00
EKZ 1000/2	1,000	1	8 × 24	6	5/1.7	1.1/0.37	62	33351	1,865.00	1,499.00
EKZ 2000/2	2,000	2	8 × 24	6	2.5/0.9	1.1/0.37	62	33352	2,180.00	1,699.00
EKZ 3000/2	3,000	1	11.2 × 34	6	6/2	3.6/1.2	124	33353	2,935.00	1,799.00
EKZ 5000/2	5,000	2	11.2 × 34	6	3/1	3.6/1.2	146	33354	3,935.00	2,499.00



Electric trolleys

DISCOUNT UP TO
-34%

Boost your efficiency in your day-to-day work with our electric trolley for the EKZ series electric chain hoist. Maximum precision, high performance and absolute safety – the ELMAG electric trolley is the ideal solution for effortless and efficient load handling. Choose quality – opt for our electric trolley for top performance.

- > Power supply and control directly via the operation of the electric chain hoist
- > Can only be used with electric chain hoists from the EKZ series
- > 2 speeds, ideal for a wide range of requirements

Models	Load capacity	Speed	Motor power	Carrier flange width	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg				kg			
Electr. undercarriage 1,000 kg for EKZ 500/2 & 1000/2	1,000	20/6.7	0.2/0.067	70-140	27.5	33355	1,215.00	799.00
Electric undercarriage 2,000 kg for EKZ 2000/2	2,000	20/6.7	0.2/0.067	70-140	28.5	33356	1,290.00	849.00
Electric undercarriage 3,000 kg for EKZ 3000/2	3,000	20/6.7	0.4/0.13	100-152	58	33357	1,500.00	999.00
Electric undercarriage 5,000 kg for EKZ 5000/2	5,000	20/6.7	0.4/0.13	100-152	67	33358	1,625.00	1,095.00

Mobile sprayers with a 24-litre tank

PS series

A mobile, compressed-air-powered sprayer for spraying cleaning agents and disinfectants.

- > 24-litre tank made of painted steel or stainless steel
- > Filling level display
- > Max. 8 bar working pressure
- > 5-metre coiled hose and 0.65-metre spray lance
- > Weight: 13 or 12.8 kg

PS 24 - Painted steel
elmag.eu/33000

INSTEAD OF PRICE EXCL. VAT ~~392.-~~
DISCOUNT -24%
299.-

PS-N 24 - Stainless steel
elmag.eu/33001

INSTEAD OF PRICE EXCL. VAT ~~736.-~~
DISCOUNT -24%
559.-



Energy station / starter 12V

AIR BAT 2 | elmag.eu/55089

- > Ultra-compact energy station / starter – 4 in 1: Power bank, jump start unit, electric air pump & LED lighting
- > Starting function for occasional jump-starting of motorcycles, cars, motorhomes or boat engines
Max. start: 3,000 A / I-Start: 1,750 A
- > Electronic air pump for 10-150 PSI (~ 0.7 - 10.3 bar)
- > Air volume 40 l/min
- > Lithium-ion battery 88.8 Wh
- > Scope of delivery: Jump start cable set incl. pole terminals (+/-), USB-A to USB-C charging cable, USB-C to USB-C charging cable, air hose with lever valve plug incl. various valve attachments



INSTEAD OF PRICE EXCL. VAT ~~267.-~~
DISCOUNT -10%
239.-

Automatic battery chargers

MULTICHARGER series

- > Automatic battery chargers for all lead-acid, MF, AGM & GEL batteries, from type 14225 also for calcium batteries (Ca/Ca)
- > Type 14120 normal charge: 6 V 1.2-14 Ah and 12 V 1.2-90 Ah, Trickle charge 1.2-120 Ah
- > Type 14225 normal charge: 12 V 14-150 Ah, trickle charge: 14-225 Ah
- > Type 20300 normal charge: 12 V 20-200 Ah, trickle charge: 20-300 Ah
- > Regeneration, summer, winter, AGM mode
- > Trickle charge, reverse polarity, short-circuit & overvoltage protection
- > Multicharger type 14120 also available in a pack of 9 incl. cardboard stand!

DISCOUNT UP TO -12%

Type 14120, 6 & 12 V
elmag.eu/56030

INSTEAD OF PRICE ~~77.-~~
69.90

Type 14225, 12 V
elmag.eu/56032

INSTEAD OF PRICE ~~136.-~~
119.90

Type 20300, 12 V
elmag.eu/56034

INSTEAD OF PRICE ~~163.-~~
145.-



Transport case

Trolley 457 | elmag.eu/55462

FlexBox 389 | elmag.eu/55468

- > Trolley 457: Wheeled, shock-resistant, lockable, waterproof, incl. 4 grid foam inserts (each 450 x 230 x 80 mm lwxh) 15 x 15 mm grid perforation, Internal dimensions: L 434, W 190, H 406
Ideal for transporting sensitive equipment or measuring instruments safely and without risk of damage
- > FlexBox 389: Compact and sturdy, Internal dimensions: L 374, W 293, H 340
Stackable; stacking system compatible with SORTIMO & BOSCH



Trolley 457
INSTEAD OF PRICE EXCL. VAT ~~62.50~~
DISCOUNT -12%
55.-



FlexBox 389
INSTEAD OF PRICE EXCL. VAT ~~89.-~~
DISCOUNT -11%
79.-

PTO power generators – for home and field operation

SEZN-IT/TN series



The PTO power generators from the SEZN IT/TN series generate quality electricity using a tractor's power take-off shaft – an ideal power supply solution for agriculture and forestry, gardening, construction and municipal operations for external operation of electric machines, water and lifting pumps, engines of construction machines, conveyor belts, hay blowers, etc.

In the event of a power failure, the SEZN models also serve as emergency power generators for house and yard, cold rooms, milk cooling, milking, breeding, feeding and heating systems, etc.

The extremely robust implements, protected all around by a tubular frame, can be mounted on the tractor using a three-point hitch. The base frame has integrated supports for pallet trucks and forklifts/front loaders for easy transportation.

TOP highlights


- > Mode selector switch for house and field operation
- > Voltage and power (ampere) display for all 3 phases using a multifunction display module
- > Adjustable frequency, voltage and unbalanced load monitoring (asymmetry)
- > Insulation monitoring 2-stage for field operation – no earth spike required
- > Including AVR control for electronic consumers (e.g. milking robot, feeding systems, etc.)



DISCOUNT UP TO
-41%

Models	400 volt		Tractor min	PTO shaft Speed	Generator Speed	Voltage control	Protection type	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kVA max.	kVA cont.									
SEZN 20WD-AVR-IT/TN	21.8	19.8	50	430	1,500	AVR	IP44	205	53780	8,190.00	5,000.00
SEZN 30WD-AVR-IT/TN	29.7	27.0	70	430	1,500	AVR	IP44	245	53781	8,640.00	5,120.00
SEZN 35WD-AVR-IT/TN	35.6	32.4	85	430	1,500	AVR	IP44	263	53782	8,890.00	5,230.00
SEZN 45WD-AVR-IT/TN	44.5	40.5	100	430	1,500	AVR	IP44	280	53783	9,155.00	5,450.00
SEZN 50WD-AVR-IT/TN	49.5	45.0	115	430	1,500	AVR	IP44	315	53784	10,055.00	6,555.00

Equipment	Connections for field use			Household use		Shutdown				Voltage monitoring	Frequency monitoring	Unbalanced load monitoring	Multifunctional display	Voltage display (3-phase)	Load display (3-ph)	LED status displays	Three-point suspension	PTO shaft protection
	230 V	400 V		400V /1h		Emergency stop	Overload	Short-circuit ThM-SS	Insulation monitor									
	Schuko 16A	CEE 16A-5p	CEE 32A-5p	CEE 63A-5p	CEE 125A-5p													
SEZN 20WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 30WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 35WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 45WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SEZN 50WD-AVR-IT/TN	2	1	1	1	-	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES

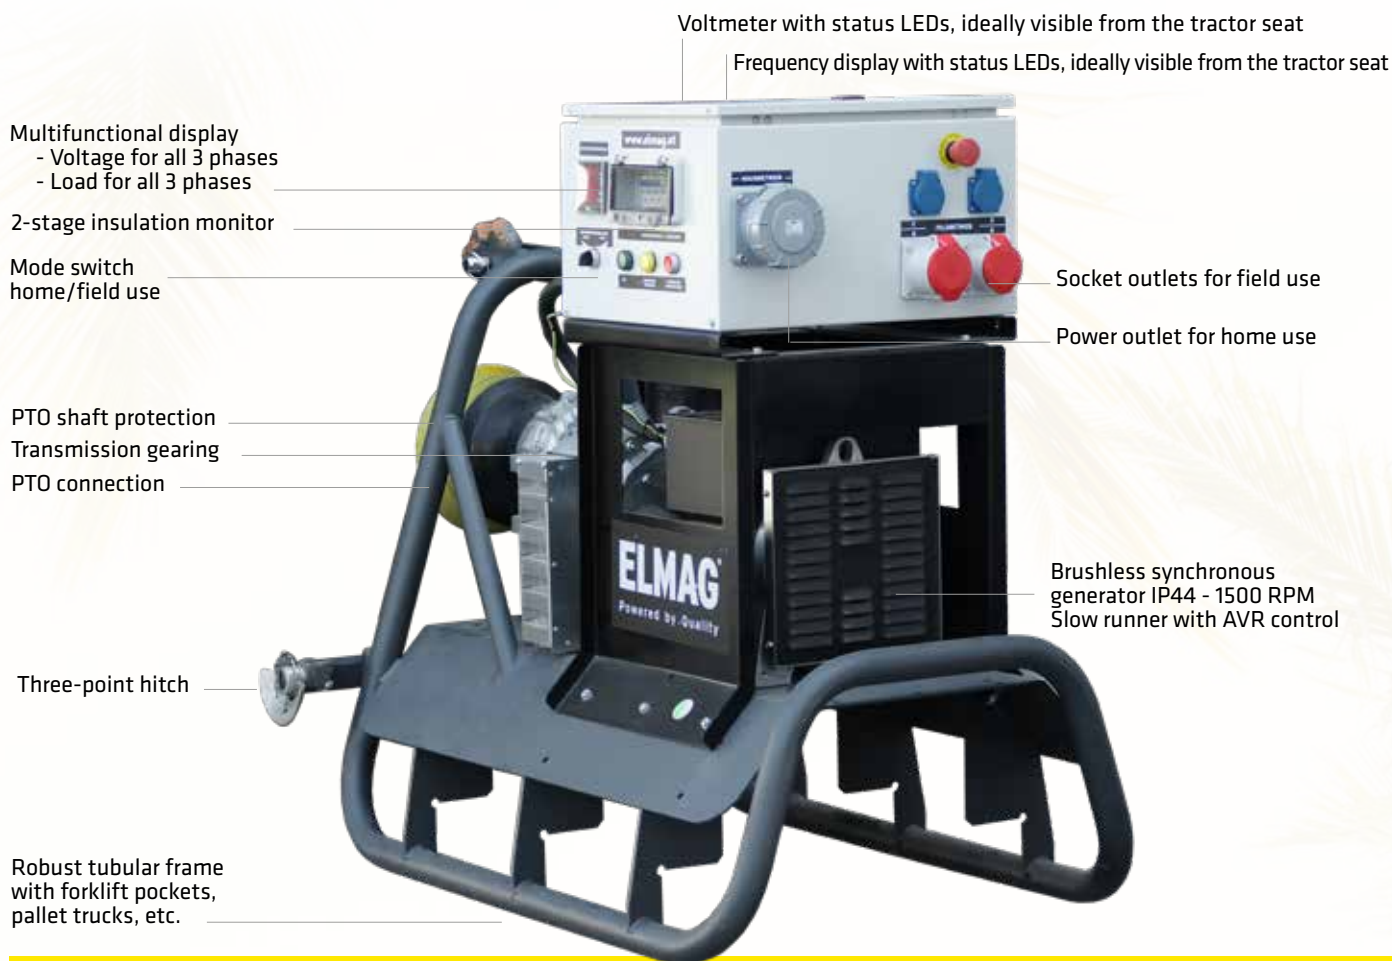

TOP Ergonomics

- > Comprehensive display and safety functions
Traffic light displays for the simplest setting and monitoring
red - yellow - green: for frequency monitoring
red - green: for voltage monitoring and unbalanced load monitoring
- > The displays for the basic settings are ideally visible from the tractor seat
- > Sockets (field operation): 2× Schuko 230 V, 1× CEE 16 A 400 V, 1× CEE 32 A 400 V
- > 1h socket (in-house operation): 1× CEE 63 A 400 V (up to SEZN 50),
1× CEE 125 A 400 V (from SEZN 80)



PTO generators – for domestic use SEZN-ECO series

- > Ideal supply solution for agriculture and forestry
- > Extensive display and safety functions (traffic light display for frequency & voltage)
- > Voltage and power display for all 3 phases via multifunction display module
- > Incl. AVR control for electronic loads (e.g. milking robot, feeding systems, etc.)
- > Adjustable frequency and voltage monitoring
- > 1h socket (in-house operation): 1× CEE 63 A 400 V (up to SEZN 50),
1× CEE 125 A 400 V (from SEZN 65)
- > Information and availability: elmag.eu/order-number



DISCOUNT UP TO
-40%

Photo of symbol

Models	400 volt		Tractor min HP	PTO shaft Speed rpm	Generator Speed rpm	Protective type	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kVA max.	kVA cont.								
SEZN 20WD-AVR-ECO	21.8	19.8	50	430	1,500	IP44	205	53790	7,315.00	4,555.00
SEZN 30WD-AVR-ECO	29.7	27.0	70	430	1,500	IP44	245	53791	7,755.00	4,670.00
SEZN 35WD-AVR-ECO	35.6	32.4	85	430	1,500	IP44	263	53792	8,005.00	5,000.00
SEZN 45WD-AVR-ECO	44.5	40.5	100	430	1,500	IP44	280	53793	8,255.00	5,225.00
SEZN 50WD-AVR-ECO	49.5	45.0	115	430	1,500	IP44	315	53794	8,995.00	5,835.00
SEZN 65WD-AVR-ECO	64.4	58.5	145	400	1,500	IP44	350	53795	10,570.00	7,500.00
SEZN 80WD-AVR-ECO	79.2	72.0	180	400	1,500	IP44	380	53796	11,070.00	7,725.00
SEZN 90WD-AVR-ECO	92.1	83.7	210	400	1,500	IP44	400	53797	11,440.00	8,055.00

Petrol generator – emergency power for your detached house**SEB 7500WD(E)-AVR**

400/230 volt frame device for commercial use in construction, for service work and agriculture, as well as for private emergency power supply.

With AVR control for sensitive consumers and high unbalanced load capacity thanks to an oversized generator.

- > Automatic shut-off in the event of low oil levels, manual start – Stage V
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Socket: 1x 230 V, 1x 400 V, 72 dB(A) at 7 m
- > WDE model incl. electric start system and maintenance-free starter battery

TOP highlights

- > **Original HONDA GX390 four-stroke gasoline engine, air-cooled**
- > **Also ideal as an emergency power supply due to 3-phase electronic AVR control**
- > **50% more unbalanced load capacity than comparable devices!**

STAGE V
HONDA
DISCOUNT UP TO
-41%
**Our top seller!**

Models	400 volt			230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm		l	l/h 75%load	h 75%load					
SEB 7500WD-AVR	8	7.2	10	3.8	3.4	14.4	GX 390	8.2	389	1	6.1	2.8	2.2	91	72	53196	2,515.00	1,490.00
SEB 7500WDE-AVR	8	7.2	10	3.8	3.4	14.4	GX 390	8.2	389	1	6.1	2.8	2.2	103	72	53197	3,165.00	2,050.00

Portable power station**ENERGY 600 - 1200**

For a mains-independent power supply and emergency power supply. Versatile application possibilities: Power tools, chargers, notebook, refrigerator. Whether for camping, at festivals, as a power source for sales stands or as a self-sufficient emergency power solution.

ELMAG power stations – convenient provision for power outages – operation in the home and long storage life without significant self-discharge.

Maintenance-free, super quiet, no exhaust fumes

- > Lithium iron phosphate battery (LIFEPO4) for maximum safety. Long service life and high cycle stability > 2,500 cycles
- > Intelligent battery management system with extensive protection functions against undervoltage, overvoltage, overheating, short-circuiting and overcharging
- > Extensive connection options: 230 V schuko, 12 V DC schuko, USB-A, USB-C, etc.
- > Digital display with detailed status monitoring, integrated MPPT solar charge controller
- > 3 charging options: Solar, 230 V and 12 V, simultaneous charging and discharging possible
- > Integrated LED lighting with SOS function

**ENERGY 600****ENERGY 1200**

Portable power station	Continuous performance	Max. power output	Battery		Voltage form	Max. charging power	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	230 volt 1-phase		Type	Capacity						
	watt			Wh			kg			
ENERGY 600	600	1000	LIFEPO4	595	pure sine	100 W	7	52901	476.00	330.00
ENERGY 1200	1200	3600	LIFEPO4	992	pure sine	200 W	11	52902	860.00	580.00

Harness the power of the sun!
DISCOUNT UP TO
-32%
Solar generator kits and solar panels for the ENERGY series

- > SET includes one power station ENERGY + matching solar panel
- > Fastening points for horizontal/vertical mounting
- > Compact solar panel, with integrated support feet, also for floor installation
- > SOLAR 100 = 1 panel with 100 watt, SOLAR 220 = 1 panel with 220 watt
- > SOLAR 100 DUO / SOLAR 220 DUO = 2 panels combined, more charging power

Kits & Solar Panels	Order number	Instead of RRP excl. VAT	RRP excl. VAT
ENERGY 600 + SOLAR 100	00401	672.00	465.00
ENERGY 1200 + SOLAR 100 DUO	00402	1,260.00	860.00

Solar panel	Power watt	Order number	Instead of RRP excl. VAT	RRP excl. VAT
SOLAR 100	100	52951	196.00	165.00
SOLAR 220	220	52953	388.00	315.00

Diesel generator – emergency power for your detached house SED W(D)(E)-AVR series

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity.

HATZ four-stroke diesel engine fulfils the EU Stage V emissions standard.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal circuit breaker with switch-off in case of overload
- > WD: Manual start with pull-wire starter
WDE: Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version

Diesel power

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices



STAGE V

DISCOUNT UP TO
-33%

CURRENT



Models	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled							Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.	Run.	Wt.				
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A			kW	l	l/h 75%load	h 75%load	kg				
SED 3000W-AVR	-	-	-	2.8	2.5	11	Hatz 1B20	5	3.1	3.2	0.7	4.6	58	78	53200	2,885.00	2,295.00
SED 4200W-AVR	-	-	-	4.2	3.7	17	Hatz 1B30	5	5	4.6	1.3	3.5	74	80	53202	3,260.00	2,615.00
SED 7000WD-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	95	83	53210	4,635.00	3,250.00
SED 7000WDE-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	110	83	53211	5,780.00	3,895.00

Diesel generator – emergency power for your detached house SED 13500WDE-AVR



STAGE V

DISCOUNT
-23%

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity. Many possible applications thanks to the interchangeable tank system, incl. a multifunction display.
Incl. powerful KOHLER/LOMBARDINI 25LD 425 diesel engine.

- > Synchronous generator with AVR control – ideal for sensitive loads
- > Thermal-magnetic circuit breaker with shutdown in case of overload and short circuit
- > Electric start incl. battery
- > Incl. magneto-stop for electric motor switch-off and automatic switch-off at low oil pressure with e-start version

Diesel power

- > Also ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices



Model	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – air-cooled							Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Stage	Performance	Tank	Cons.	Run.	Wt.				
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A			kW	l	l/h 75%load	h 75%load	kg	dB(A) @ 7 m			
SED 13500WDE-AVR	13.5	12.7	18	5	4.6	20	Kohler/Lomb. 25LD 425	-	13	20	3	6.7	167	85	53236	6,375.00	4,890.00

Inverter generator

SEBSS 2000Wi & 3000Wi

STAGE V YAMAHA

Camping, boat and sailing tours, assembly, service and rescue operations, power supply for mobile homes, market stalls and mountain huts – the compact SEBSS inverters are flexible “all-rounders” for independent energy supply.

Extra quiet – thanks to the YAMAHA petrol engine

The sound-insulating plastic housing and the standard ECO automatic function ensure an extremely low noise level and make the devices the ideal companions in noise-sensitive environments.

- > Efficient air cooling, extra quiet – max. 58 - 71 dB(A)
- > Easy handling – recoil start with YAMAHA EasyStart
- > LED status display, protection class IP23
- > Automatic switch-off in case of oil shortage, overload and short-circuit protection
- > ECO automatic, parallel operation possible

SEBSS 2000Wi



Particularly quiet

DISCOUNT UP TO -41%

SEBSS 3000Wi

Models	230 volt			12 volt	5 volt	Gasoline engine - 50 Hz - Stage 5							Order number	Instead of RRP excl. VAT	RRP excl. VAT
	1-phase			DC	USB	Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.			
	kVA max.	kVA cont.	A	A	A	YAMAHA	kW	ccm		l	l/h 75%load	h 75%load			
SEBSS 2000Wi	2.1	1.8	8	8.3	2	MZ80	1.8	79	1	4	1	4	53045	1,040.00	610.00
SEBSS 3000Wi	3	2.6	11.3	8.3	2	MZ175	3.5	171	1	6	1.5	4	53046	1,395.00	1,080.00

Petrol generator

SEB W(-AVR) series

STAGE V HONDA

Petrol-powered high-speed generators with synchronous generators are the right choice when it comes to the short-term supply of any electrical consumers and power tools. These include lighting systems, boilers, fan heaters, hot plates, power drills, circular saws and chain saws, lawn mowers, water pumps, etc.

A sturdy tubular frame protects the devices during maintenance, customer service and installation work, as well as when supplying power on construction sites, in municipal operations or in agriculture.

- > Original HONDA four-stroke gasoline engine, air-cooled, synchronous generator
- > Thermal circuit breaker with shut-off in case of overload, automatic shut-off in case of oil shortage
- > AVR models incl. electronic voltage regulation (AVR) for sensitive consumers



Very reasonably priced quality

DISCOUNT UP TO -41%

Models	230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A		kW	ccm		l	l/h 75%load	h 75%load	kg	dB(A) at 7 m			
SEB 3300 W	3	2.7	12	Honda GX 200	3.8	196	1	3.1	1.3	2.4	42	70	53102	880.00	520.00
SEB 3300W-AVR	3	2.7	12	Honda GX 200	3.8	196	1	3.1	1.3	2.4	42	70	53190	1,135.00	970.00
SEB 4100W-AVR	4	3.6	16	Honda GX 270	5.8	270	1	5.3	2	2.7	60	71	53191	1,510.00	1,310.00
SEB 7000 W	7	6	26	Honda GX 390	8.2	389	1	6.1	2.7	2.3	85	76	53109	2,000.00	1,690.00

Petrol generator – ideal for emergency power, also for heat pumps

SEB WDE-AVR series

HONDA STAGE V DISCOUNT UP TO -27%

Excellent, frequently used high-performance device with 20 l interchangeable tank and fuel-saving ECO automatic idle control.

Ideal for use on construction sites, but also as an emergency power supply for buildings with high power requirements (e.g. heat pumps).

- > Socket: 1 × 230 V, 1 × 400 V, electric start, 75 or 76 dB(A) at 7 m
- > Incl. operating hours counter, automatic idling & thermal magnetic circuit breaker
- > Incl. electric start system and maintenance-free battery



Suitable for heat pumps

TOP highlights

- > Ideal as an emergency power supply due to 3-phase electronic AVR control
- > 50% more unbalanced load capacity than comparable devices!
- > 20 litre tank, 5 or 5.6 l/h consumption (at 75% load) – interchangeable tank system
- > Original HONDA GX 690 or iGX 800 petrol engine, air-cooled – stage V

Models	400 volt			230 volt			Petrol engine – 3000 rpm – 50 Hz – air-cooled – stage 5							Wt.	Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm		l	l/h 75%load	h 75%load	kg	dB(A) @ 7 m			
SEB 16000WDE-AVR	16	14.4	21	5.8	5.3	23	GX 690	15	688	2	20	5	4	154	75	53199	4,735.00	3,475.00
SEB 18000WDE-AVR	17.5	16	23	5.8	5.3	23	iGX 800	16	779	2	20	5.6	3.6	154	76	53194	5,475.00	4,895.00

Petrol generator SEBS WD(E)/ 25-AVR series

DISCOUNT
-22%

Models	400 V	230 V	3,000 rpm – air-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	Honda	Stage	I	I/h 75% load				
SEBS 7500WD	8	3.8	GX 390	5	25	2.8	106	53152	3,140.00	2,450.00
SEBS 7500WDE	8	3.8	GX 390	5	25	2.8	113	53153	3,720.00	2,890.00



CURRENT

Petrol/diesel generator SE(B/D)SS WDE-AVR series

DISCOUNT UP TO
-24%

Models	400 V	230 V	3,000 rpm – air-cooled			Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type	Tank	Cons.				
	kVA max.	kVA max.	Stage 5	I	I/h 75% load	kg			
SEBSS 6500WDE	7	2.5	Honda GX 390	20	2.4	150	53144	6,470.00	5,100.00
SEBSS 12000WDE	12	4	Honda GX 630	20	4.2	204	53147	7,920.00	6,350.00
SEBSS 15000WDE	15	6	Honda GX 690	20	5	224	53148	9,155.00	7,225.00
SEDSS 7000WDE	7	3.8	Hatz 1B40	20	1.9	200	53226	10,635.00	9,500.00



Diesel generator SEDSS WDE-AVR-DSE4520 series

DISCOUNT UP TO
-23%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	I	I/h 75% load				
SEDSS 113WDE V2	11	3.8	D722	5	58	2.5	345	00751	13,260.00	10,650.00
SEDSS 133WDE V2	13.5	5	D902	5	58	3.3	360	00752	13,940.00	11,450.00
SEDSS 243WDE V2	24	8.8	V1505	-	73	5	572	00754	17,775.00	13,825.00
SEDSS 113WDE V4	11	3.8	D722	5	58	2.5	345	00771	14,850.00	11,490.00
SEDSS 133WDE V4	13.5	5	D902	5	58	3.3	360	00772	15,530.00	12,050.00
SEDSS 243WDE V4	24	8.8	V1505	-	73	5	572	00774	19,370.00	16,175.00



Diesel generator SEDSS WDE-AVR-DSE4520 series

DISCOUNT UP TO
-20%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	I	I/h 75% load				
SEDSS 20WDE V4	19	6.8	V2203M	5	80	3.7	660	00777	22,335.00	17,950.00
SEDSS 34WDE V4	33	11.6	V3300	5	90	6	870	00778	25,530.00	20,885.00
SEDSS 44WDE V4	44	15.4	V3800DIT	3 A	90	7.7	925	00779	26,745.00	23,825.00



Emergency power package SEDSS WDE-ASS series

DISCOUNT
-20%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	I	I/h 75% load				
SEDSS 113WDE	11	3.8	D722	5	58	2.5	345	00543	15,740.00	12,595.00
SEDSS 133WDE	13.5	5	D902	5	58	3.3	360	00545	16,460.00	13,175.00
SEDSS 183WDE	18	6.8	D1105	5	63	3.9	450	00547	18,180.00	14,545.00
SEDSS 243WDE	24	8.8	V1505	3 A	73	5	572	00549	20,640.00	16,470.00



Diesel generator SEDSS WDE-IT/TN series

DISCOUNT
-17%

Models	400 V	230 V	3,000 rpm – water-cooled				Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase	1-phase	Type		Tank	Cons.				
	kVA max.	kVA max.	KUBOTA	Stage	I	I/h 75% load				
SEDSS 113WDE	11	3.8	D722	5	58	2.5	345	00720	15,255.00	12,595.00
SEDSS 133WDE	13.5	5	D902	5	58	3.3	360	00724	16,875.00	13,975.00
SEDSS 183WDE	18	6.8	D1105	5	63	3.9	450	00721	17,945.00	14,885.00
SEDSS 20WDE	19	6.8	V2203M	5	80	3.7	660	00725	20,245.00	16,765.00
SEDSS 44WDE	44	15.3	V3800DIT	3 A	90	7.7	925	00727	26,440.00	21,940.00



Portable power station

ENERGY 3600 PREMIUM IP54 | elmag.eu/52915

NEW IN OUR RANGE!

Zero emissions, silent, maintenance-free & ready for immediate use

- > High performance – 3,600 W Continuous power, extreme peak power 20,000 W
Can be expanded to 6,912 W (up to 3 units in parallel), suitable for high inrush currents
- > Maximum safety – IP54 protection rating, protection against over- and under-discharge, short circuits and overheating
- > Fast charging – 2.3 h up to a full charge, 1.8 hours up to 90%
– ideal for short charging times
- > Lightweight and portable – weighs just 23.8 kg – enabling versatile use
- > Ready for use on construction sites, for servicing and installation

INSTEAD OF PRICE EXCL. VAT
~~2,790.-~~

2,690.-



NEW!

LIMITED EDITION!
STOCK CLEARANCE – VALID WHILE STOCKS LAST!!



MultiSafeVario 2XL-TC
DEUTSCHLAND
69.90

Automatic welding screen

MultiSafeVario® 2XL-TC GERMANY

elmag.eu/59374

**TRUE
COLOR**

- > For all common welding processes, also for TIG > 5 A
- > **Variable protection level 9-13, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 16321 ELMAG W4 / 9-13 V1 CE
- > Shutter speed: 0.05 ms
- > Large viewing windows: 98 × 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell**
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**
- > Optionally available: Dioptre disc insert



FREE NOW!

GERMANY fan scarf printed on both sides!



ELMAG®
Powered by Quality

WHO IS ELMAG?

- > Family business with 70 employees from Ried im Innkreis, Upper Austria
- > High-quality machines for compressed air, welding, metalworking, workshop technology and power generation
- > Available from specialised dealers for tools, machines and electrical engineering
- > Service: Professionally trained service team, on-site service for large machines
- > For 40 years: unique, trusting and appreciative corporate culture

QUALITY FROM AUSTRIA

Quality: No compromises

High-quality, robust machines featuring well-known, tried-and-tested components that you can rely on.

Service that convinces

We emphasise simple operation and maintenance. Our service team will provide you with fast and competent support, including on site for large machines or commissioning.

Safety and reliability

All ELMAG products fulfil the latest safety requirements. You receive a 2-year warranty, 3 years upon registration and at least 15 years spare parts supply.

